
ALT	Page	e 1 of 1	DRAWN 2 <sup>7</sup>	1.03.2024 B <sup>v</sup>	/ DSA			
	CABLE REQUIREMENTS:			PLUG / END A REQUIREMENTS:		IREMENTS:	CONNECTOR / END B REQUIREMENTS:	
PL0043	Colour:	BLACK		Type: SG03DC		Туре:	SG599	
	Туре:	pe: 3 Core 1.00mm <sup>2</sup> H05RN-F (European Approved)		Colour: BLACK		Colour:	BLACK	
	Conductor Colour Codes: Earth (Green & Yellow)			Rating: 10A		Rating:	10A	
PC3876				Reference: C14 Dual Locking Connector (European Approved)		ocking Connector	Reference:	C15 IEC Locking Connector
	Complete Powerlead Rated: 10A/250V						(European / Approved)	

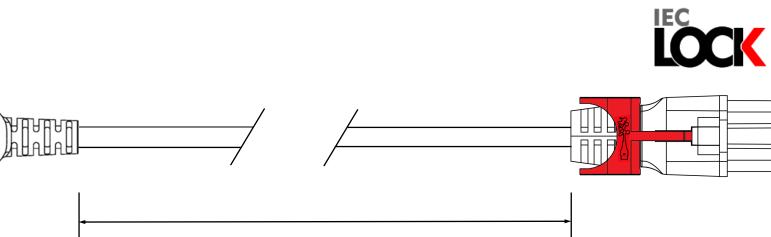

2857mm (+/- 30mm)

3000mm (+/- 30mm)

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:	HANKING	TERMINATIONS / FURTHER COMMENTS:		
PACKAGING OUTERTBC	Rev Modification Date Name				
PIN PROTECTING COVERNO					
WIRING INSTRUCTIONSNO		Loose			
PRE-SHIPMENT INSPECTIONNO					
COMMENTS:					

Errors & Omissions excluded. Specification may be subject to change without notice.

LOCK