
ALT	Page 1 of 1		DRAWN 21.03.2024 BY DSA		APPROVED 21.03.2024 BY JH			
	CABLE REQUIREMENTS:			PLUG / END A REQUIREMENTS:		REMENTS:	CONNECTOR / END B REQUIREMENTS:	
PL0051	Colour: WHITE (RAL 9010)			Type: SG03DC		Туре:	SG599	
	Туре:	3 Core 1.00mm ² H05RN-F (European Approved)		Colour:	BLACK		Colour:	BLACK
	Conductor Colour Codes: Earth (Green & Yellow)			Rating:	10A	Rating:		10A
PC3871	Live (Brown)		Reference: C14 Dual Locking Connector (European Approved)			Reference:	C15 IEC Locking Connector	
	Complete Powerlead Rated: 10A/250V					(European / Approved)		

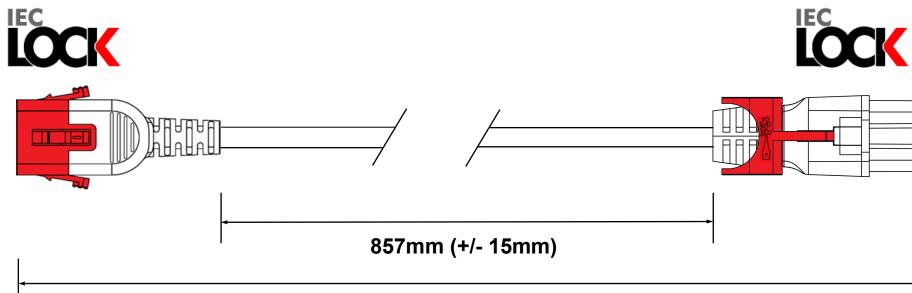

1000mm (+/- 15mm)

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:			HANKING	TERMINATIONS / FURTHER COMMENTS:
PACKAGING OUTERTBC	Rev Modification	Date	Name		
PIN PROTECTING COVERNO					
WIRING INSTRUCTIONSNO				Loose	
PRE-SHIPMENT INSPECTIONNO					
COMMENTS:					

Errors & Omissions excluded. Specification may be subject to change without notice.