
	Page 1 of 1		DRAWN 2	1.03.2024 BY DSA		APPROVED 21.03.2024 BY JH		
	CABLE REQUIREMENTS:			PLUG / END A REQUIREMENTS:		CONNECTOR / END B REQUIREMENTS:		
PC3875	Colour:	blour: WHITE (RAL9010)		Type: SG03DC		Туре:	SG599	
	Туре:	3 Core 1.00mm ² H05RN-F (European Approved)		Colour:	BLACK		Colour:	BLACK
	Conductor Colour Codes: Earth (Green & Yellow)			Rating:	10A		Rating:	10A
PC3875				Reference: C14 Dual Locking Connector (European Approved)		cking Connector	Reference:	C15 IEC Locking Connector
	Complete Powerlead Rated: 10A/250V						(European / Approved)	



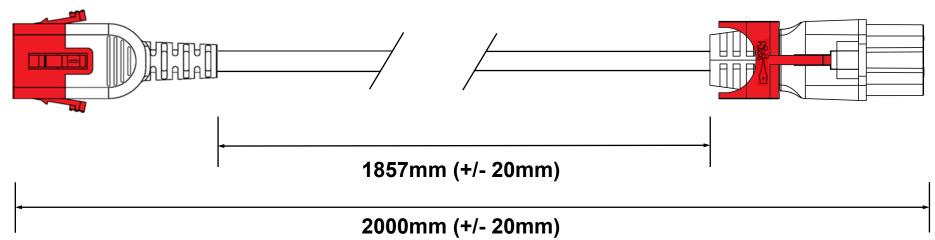

EXTRA REQUIREMENTS:	CHANGE MANAGEMENT:			HANKING	TERMINATIONS / FURTHER COMMENTS:
PACKAGING OUTERTBC	Rev Modification	Date	Name		
PIN PROTECTING COVERNO					
WIRING INSTRUCTIONSNO				Loose	
PRE-SHIPMENT INSPECTIONNO					
COMMENTS:					

Errors & Omissions excluded. Specification may be subject to change without notice.

LOCK