
| ALT | Page 1 of 1 DRAV | | DRAWN 2 ² | 1.03.2024 BY | (DSA | APPROVED 21.03.2024 BY JH | | |
|--------|---|---|---|----------------------------|-----------------|---------------------------------|---------------------------|-------|
| | CABLE REQUIREMENTS: | | | PLUG / END A REQUIREMENTS: | | CONNECTOR / END B REQUIREMENTS: | | |
| PL0071 | Colour: | Colour: BLUE (RAL 5015) | | | Type: SG03DC | | Туре: | SG599 |
| | Туре: | 3 Core 1.00mm ² H05RN-F (European Approved) | | Colour: BLACK | | Colour: | BLACK | |
| | Conductor Colour Codes: Earth (Green & Yellow) | | | Rating: 10A | | Rating: | 10A | |
| PC3870 | Live (Brown) | | Reference: C14 Dual Locking Connector (European Approved) | | cking Connector | Reference: | C15 IEC Locking Connector | |
| | Complete Powerlead Rated: 10A/250V | | | | | (European / Approved) | | |

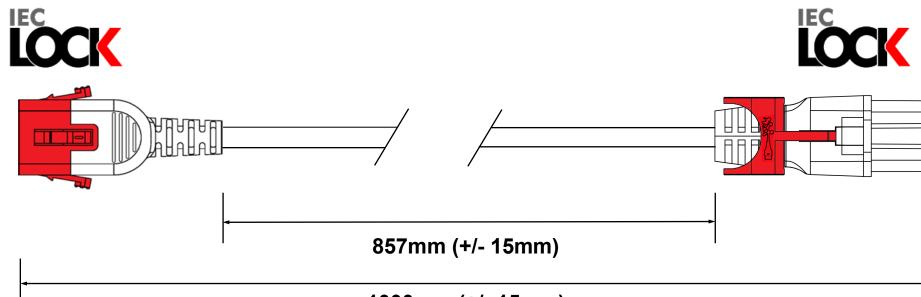

1000mm (+/- 15mm)

| EXTRA REQUIREMENTS: | CHANGE MANAGEMENT: | | | HANKING | TERMINATIONS / FURTHER COMMENTS: |
|---------------------------|--------------------|------|------|---------|----------------------------------|
| PACKAGING OUTERTBC | Rev Modification | Date | Name | | |
| PIN PROTECTING COVERNO | | | | | |
| WIRING INSTRUCTIONSNO | | | | Loose | |
| PRE-SHIPMENT INSPECTIONNO | | | | | |
| COMMENTS: | | | | | |
| | | | | | |

Errors & Omissions excluded. Specification may be subject to change without notice.