



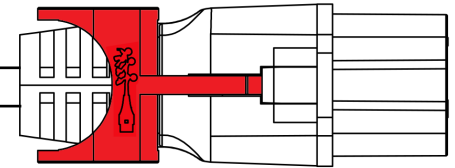
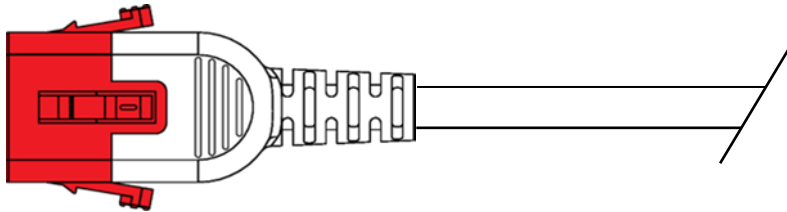



Page 1 of 1	DRAWN 21.03.2024 BY DSA	APPROVED 21.03.2024 BY JH	
<div>PL0072</div> <div>PC3874</div>	CABLE REQUIREMENTS: Colour: BLUE (RAL 5015) Type: 3 Core 1.00mm ² H05RN-F (European Approved) Conductor Colour Codes: Earth (Green & Yellow)  Neutral (Blue)  Live (Brown) 	PLUG / END A REQUIREMENTS: Type: SG03DC Colour: BLACK Rating: 10A Reference: C14 Dual Locking Connector (European Approved)	CONNECTOR / END B REQUIREMENTS: Type: SG599 Colour: BLACK Rating: 10A Reference: C15 IEC Locking Connector (European / Approved)
	Complete Powerlead Rated: 10A/250V		



1857mm (+/- 20mm)



2000mm (+/- 20mm)

EXTRA REQUIREMENTS: PACKAGING OUTERTBC PIN PROTECTING COVERNO WIRING INSTRUCTIONSNO PRE-SHIPMENT INSPECTION....NO COMMENTS:	CHANGE MANAGEMENT: Rev Modification Date Name	HANKING <div>Loose</div>	TERMINATIONS / FURTHER COMMENTS:
--	--	--	---