



PORTAFUSIBILI
FUSE- HOLDERS
PORTE-FUSIBLES
SICHERUNGSHALTER

TIPO
TYPE
TYPE
TYP


PTF / 45
PTF / 50

PER FUSIBILI
FOR FUSES
POUR FUSIBLES
FÜR SICHERUNGEN


5 X 20



PTF / 45





Panel min. 0,8 max. 4,5 mm.

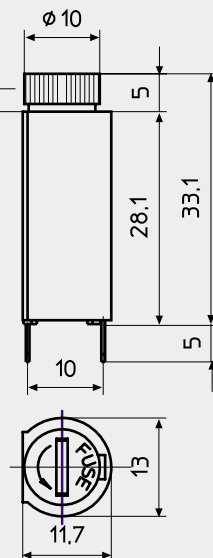

PTF / 50

Panel min. 0,8 max. 4,5 mm.

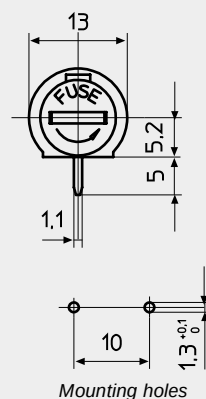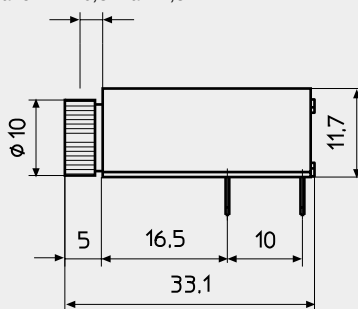

PER C.S.

FOR P.C.B.

POUR C.I.

FÜR LEITERPLATTE

IEC 127-6  
UL 512 
C 22.2 n°39-M  

Corpo isolante Nero	Insulating body Black	Corps isolant Noir	Isolierkörper Schwarz	PBT UL 94 V0
Coperchio A baionetta	Bayonet cover	Couverture baionette	Bajonettdeckel	
Contatti	Contacts	Contacts	Kontakte	CuZn 37 + Ni + Sn
Foro di montaggio	P.C.B. mounting hole	Perçage C.I.	Leiterplattenbohrung	Ø 1,3 mm
Categoria	Class	Catégorie	Baureihe	PC2
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	6,3 A
Tensione	Voltage	Tension	Betriebsspannung	250 V
Potenza dissipabile	Operating power	Puissance dissipable	Ausgangsleistung	2,5 W
Resistenza di contatto	Contact resistance	Résistance de contact	Übergangswiderstand	< 5 m Ω
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	>10 ² M Ω
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	> 3000 Vac / 60 "