

ACT Multimode Fiber Optic Polarity Twist with LC connectors 50/125 OM3


Item : RL83xx

Revision : 1.0

Date : 24-05-2024

Drawn by : YMN

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.

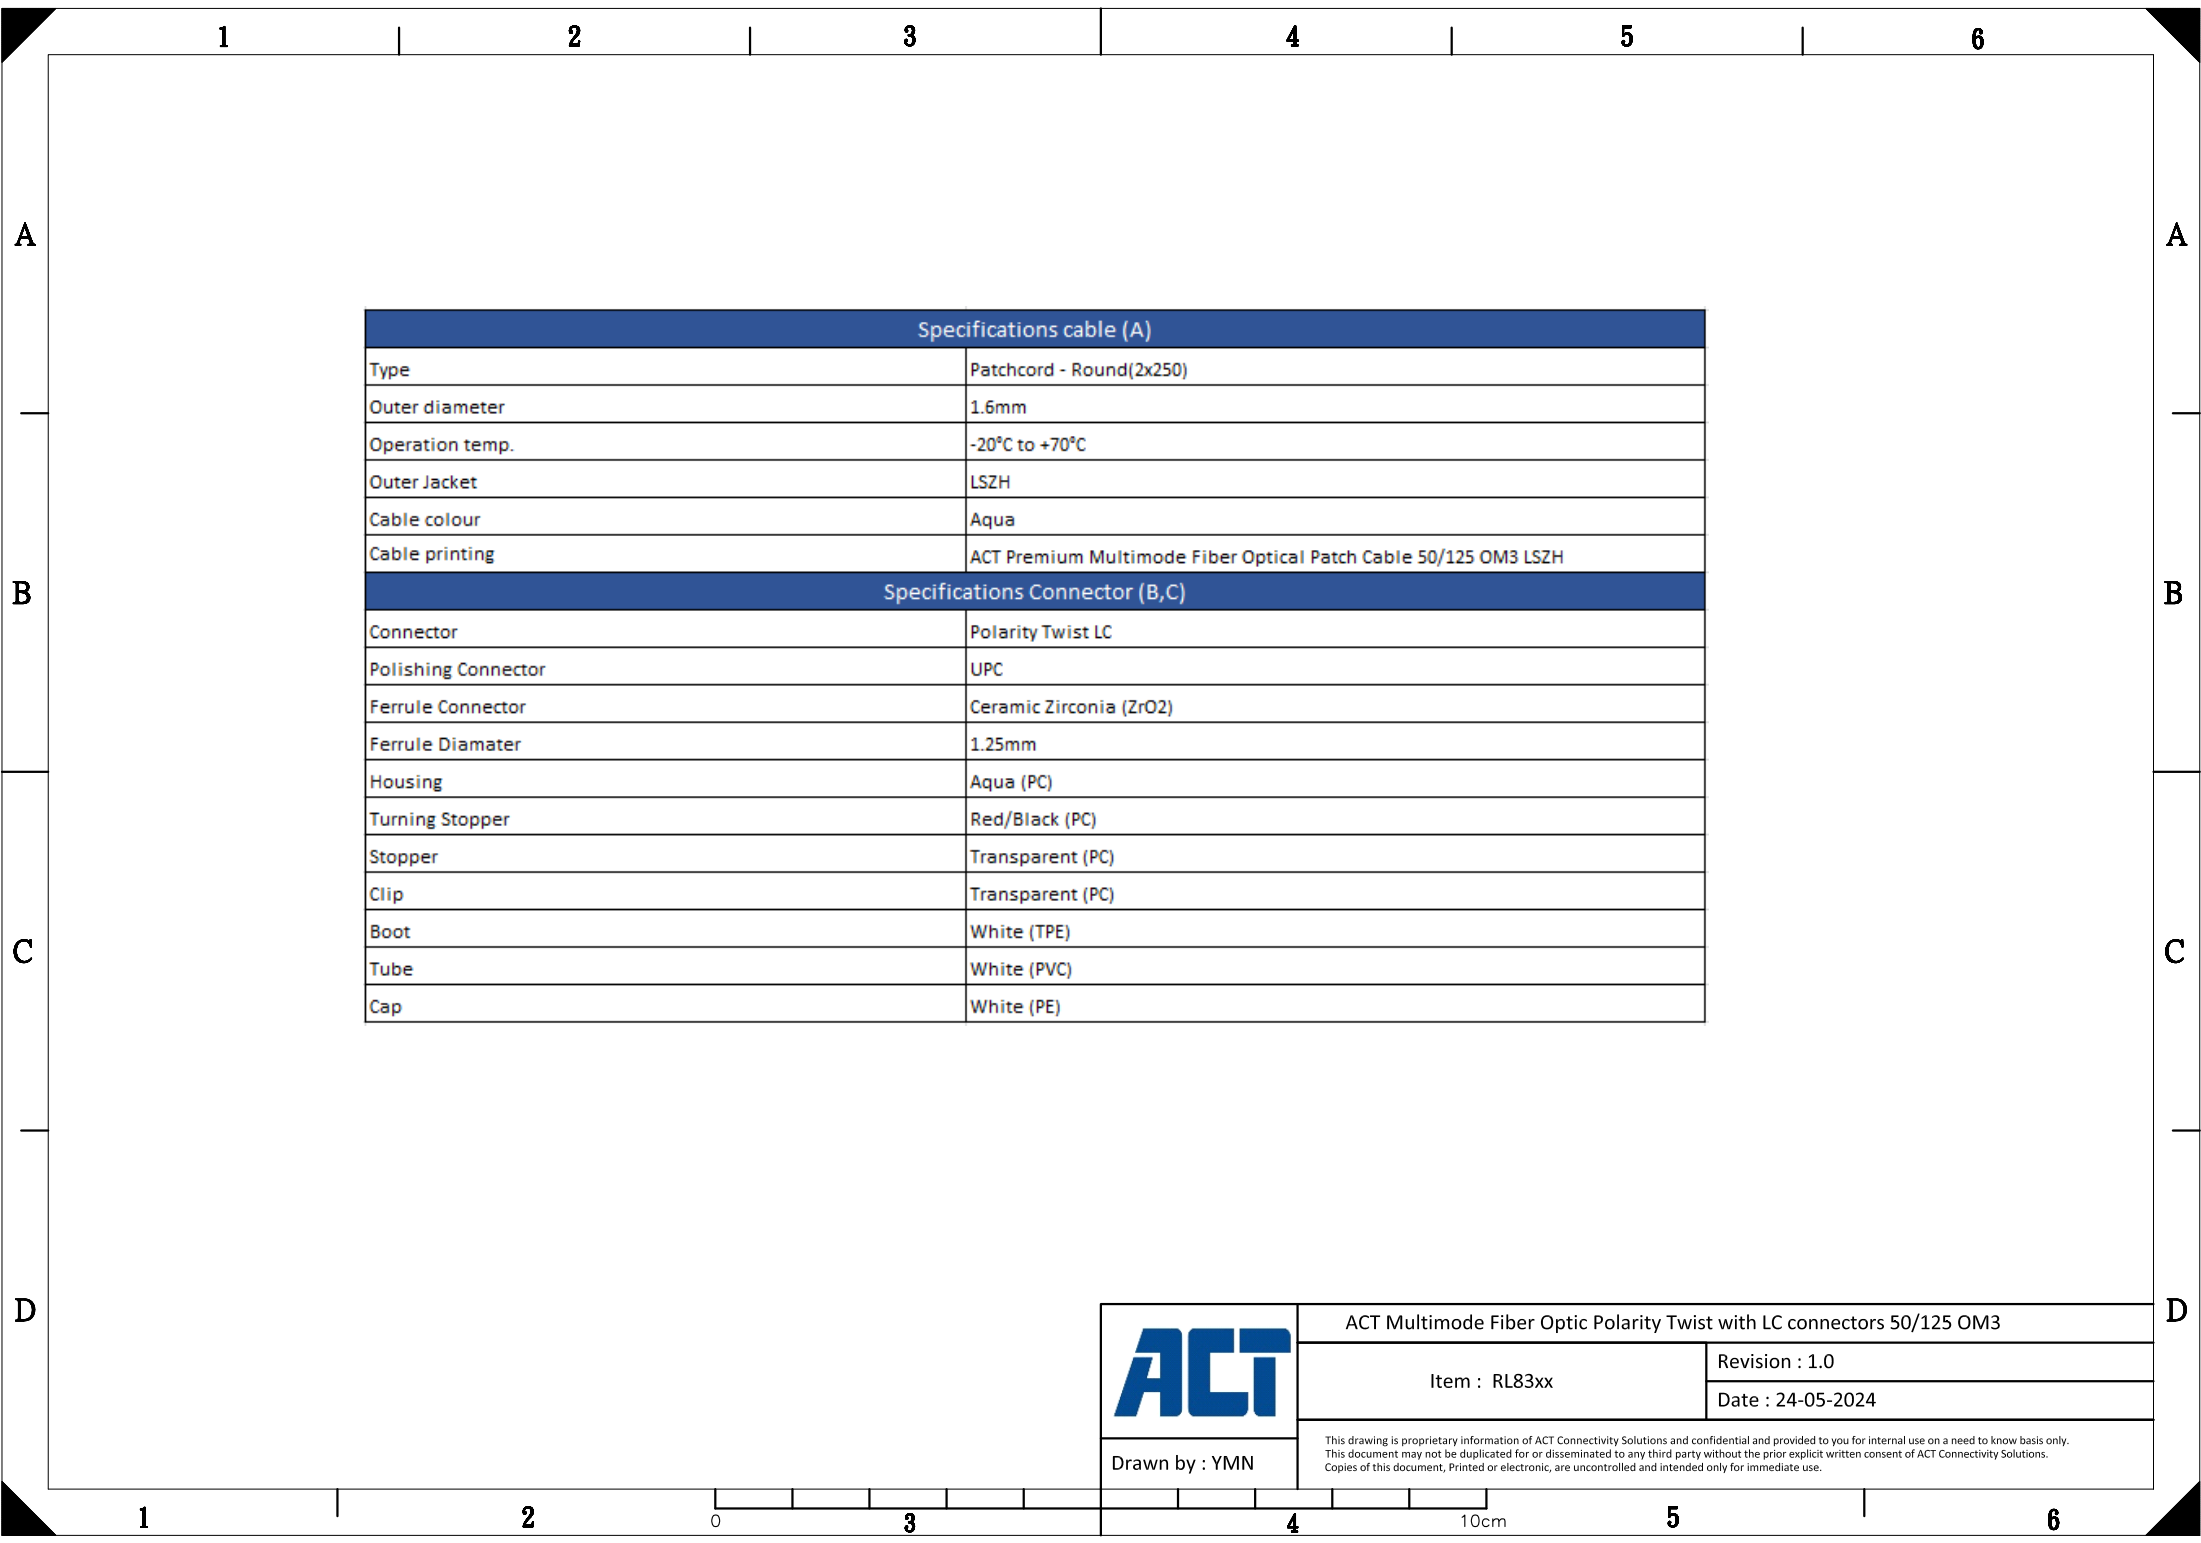

Specifications cable (A)	
Type	Patchcord - Round(2x250)
Outer diameter	1.6mm
Operation temp.	-20°C to +70°C
Outer Jacket	LSZH
Cable colour	Aqua
Cable printing	ACT Premium Multimode Fiber Optical Patch Cable 50/125 OM3 LSZH
Specifications Connector (B,C)	
Connector	Polarity Twist LC
Polishing Connector	UPC
Ferrule Connector	Ceramic Zirconia (ZrO2)
Ferrule Diamater	1.25mm
Housing	Aqua (PC)
Turning Stopper	Red/Black (PC)
Stopper	Transparent (PC)
Clip	Transparent (PC)
Boot	White (TPE)
Tube	White (PVC)
Cap	White (PE)



Drawn by : YMN


ACT Multimode Fiber Optic Polarity Twist with LC connectors 50/125 OM3

Item : RL83xx

Revision : 1.0


Date : 24-05-2024

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.

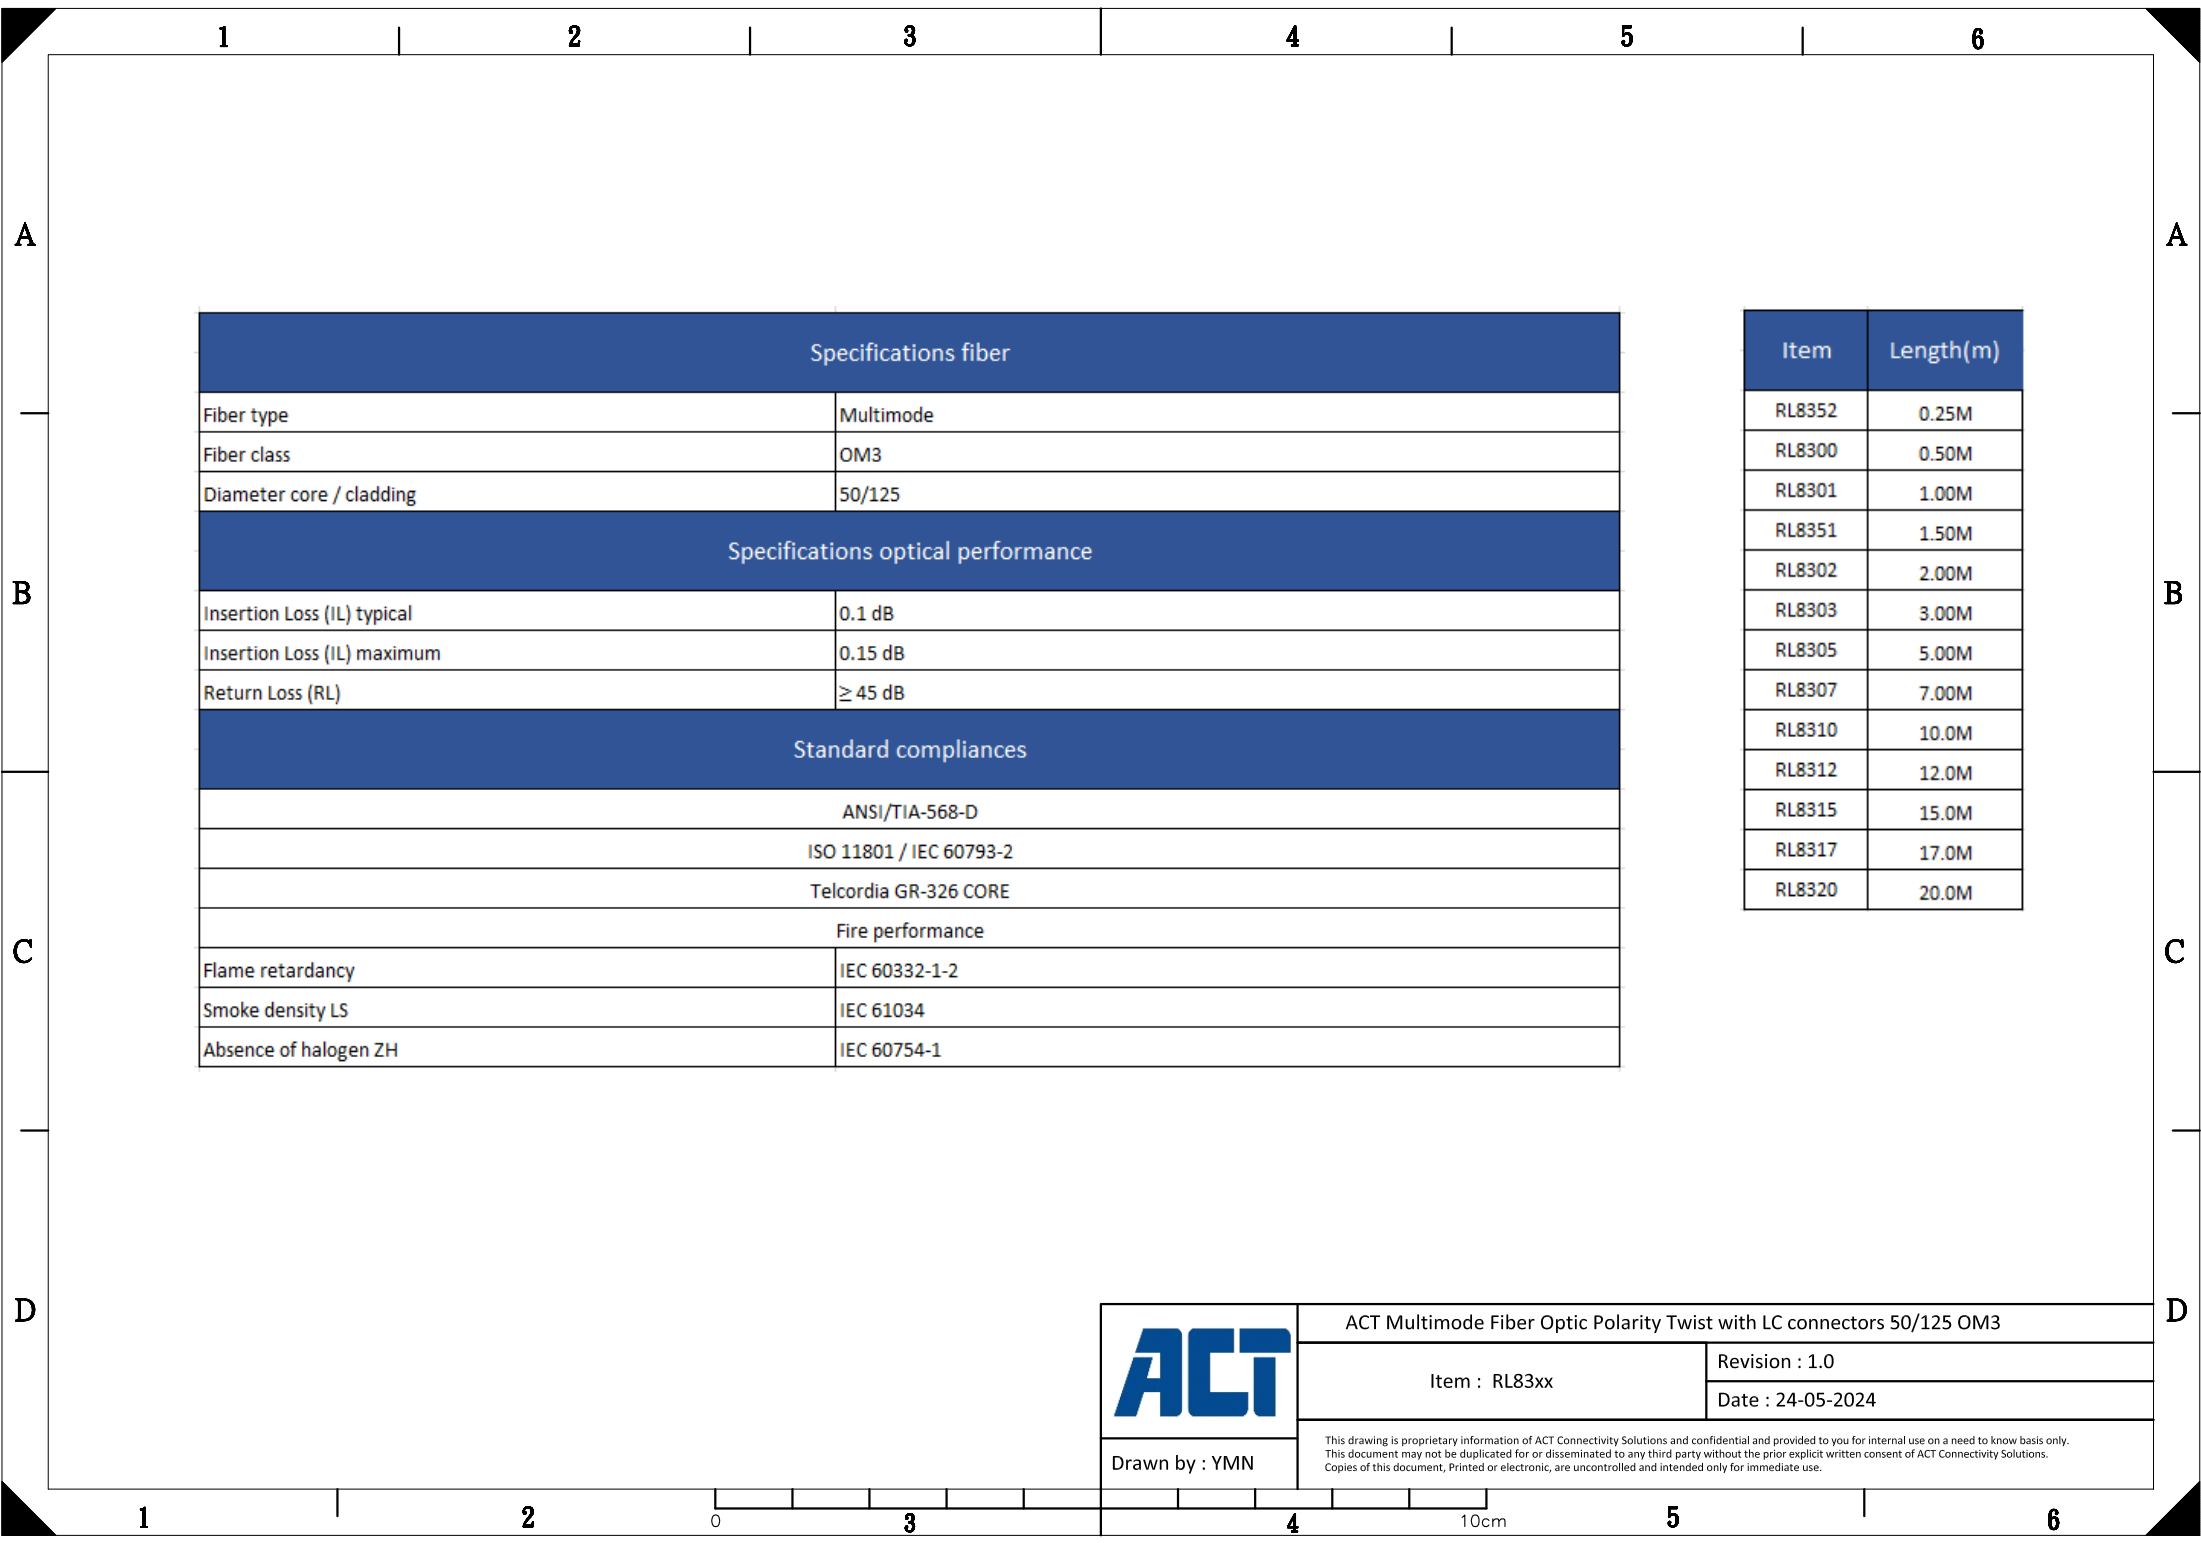

Specifications fiber	
Fiber type	Multimode
Fiber class	OM3
Diameter core / cladding	50/125
Specifications optical performance	
Insertion Loss (IL) typical	0.1 dB
Insertion Loss (IL) maximum	0.15 dB
Return Loss (RL)	≥ 45 dB
Standard compliances	
ANSI/TIA-568-D	
ISO 11801 / IEC 60793-2	
Telcordia GR-326 CORE	
Fire performance	
Flame retardancy	IEC 60332-1-2
Smoke density LS	IEC 61034
Absence of halogen ZH	IEC 60754-1

Item	Length(m)
RL8352	0.25M
RL8300	0.50M
RL8301	1.00M
RL8351	1.50M
RL8302	2.00M
RL8303	3.00M
RL8305	5.00M
RL8307	7.00M
RL8310	10.0M
RL8312	12.0M
RL8315	15.0M
RL8317	17.0M
RL8320	20.0M



ACT Multimode Fiber Optic Polarity Twist with LC connectors 50/125 OM3

Item : RL83xx

Revision : 1.0

Date : 24-05-2024

Drawn by : YMN

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only.
This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions.
Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.