
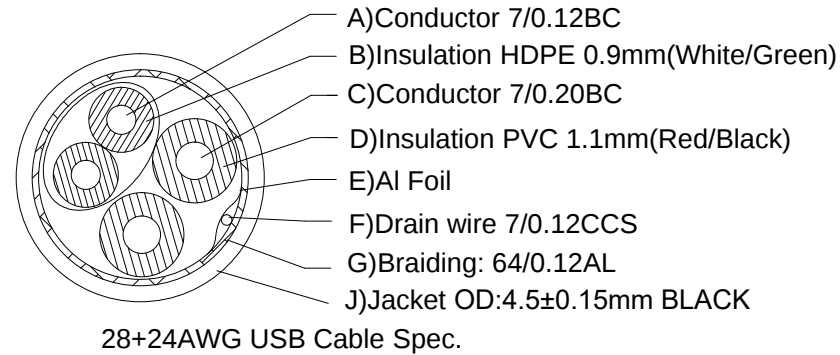
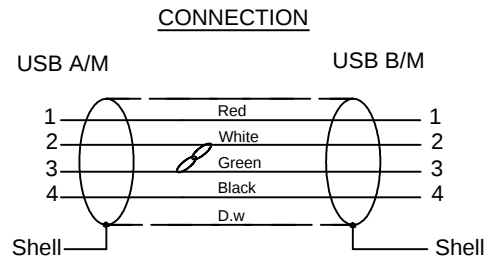


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/09	

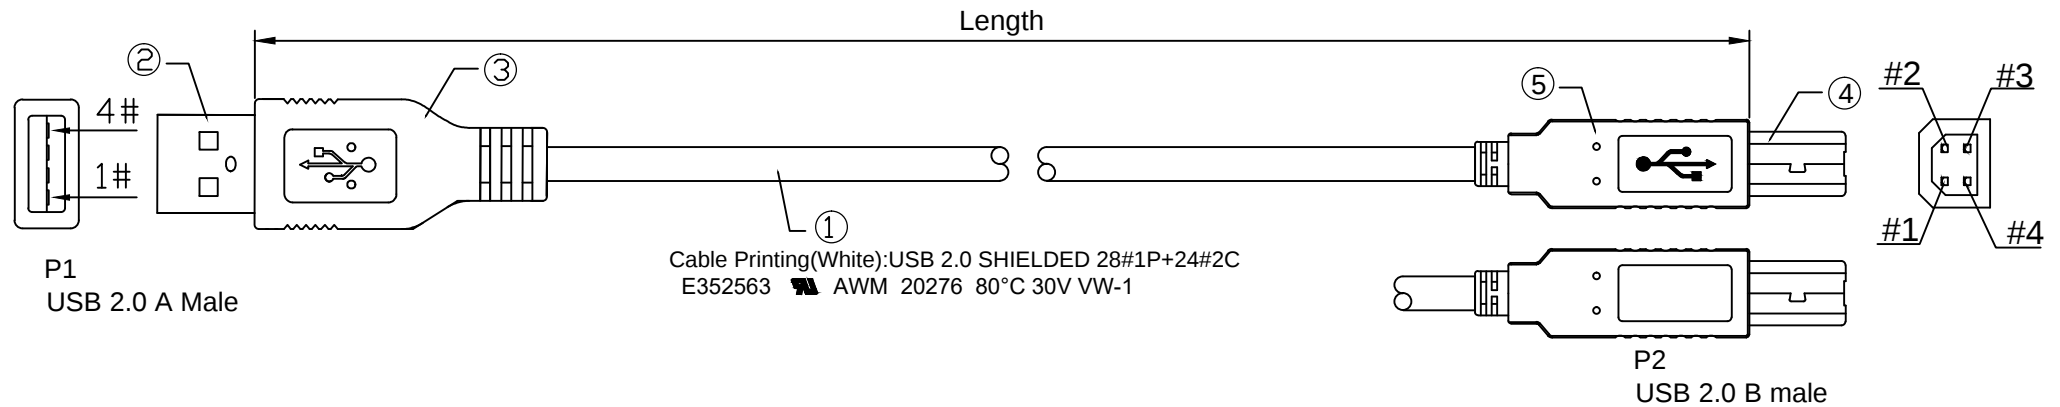

Remark:
1.100% Open/Short Test
2.Conductive Resistance:2ohms MAX
3.Insulation Resistance:5M ohm MIN.
4.The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB2398	0.5m
SB2401	1.0m
SB2402	1.8m
SB2403	3.0m
SB2405	5.0m

⑤	External Mold	Outer Mould 45P PVC, BLACK	1PC	
④	Connector	USB B Male, Nickle-Plated	1PC	
③	External Mold	Outer Mould 45P PVC, BLACK	1PC	
②	Connector	USB A Male, Nickle-Plated	1PC	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC BLACK		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO B Male	PAGE NO	1/1
		DATE	2018/08/09
APPROVAL		CHECKED	
		DRAWN	