


| REV | DATE      | DESCRIPTION       |
|-----|-----------|-------------------|
| A   | 04/14/"03 |                   |
| B   | 07/25/"06 | CORRECT DIMENSION |

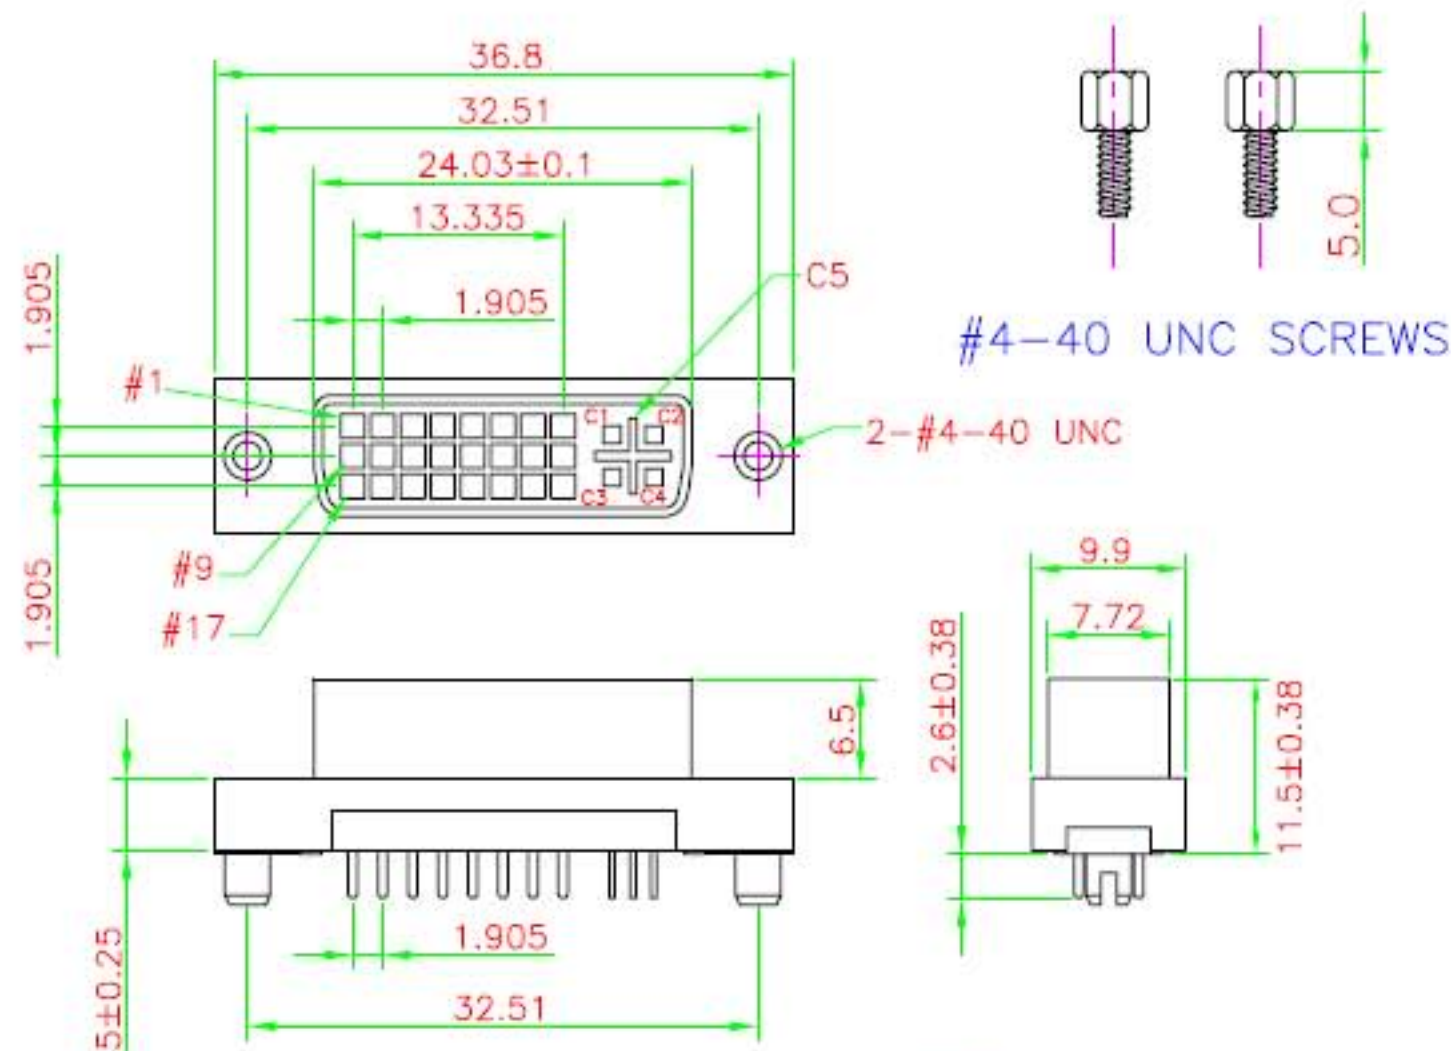

MATERIALS:

HOUSING: GLASS FILLED THERMOPLASTIC  
UL94V-0

CONTACT: PHOSPHOR BRONZE,  
GOLD FLASH

SHELL: ZINC ALLOY,  
NICKEL PLATED

TEMPERATURE RANGE: -20°C to +85°C


ELECTRICAL:

Voltage rating: 500VAC. R.M.S.

Current rating: 1.5 AMP

Insulation resistance:  
1000 Megohms Min.

Contact resistance:  
20millohms MAX. (initial)

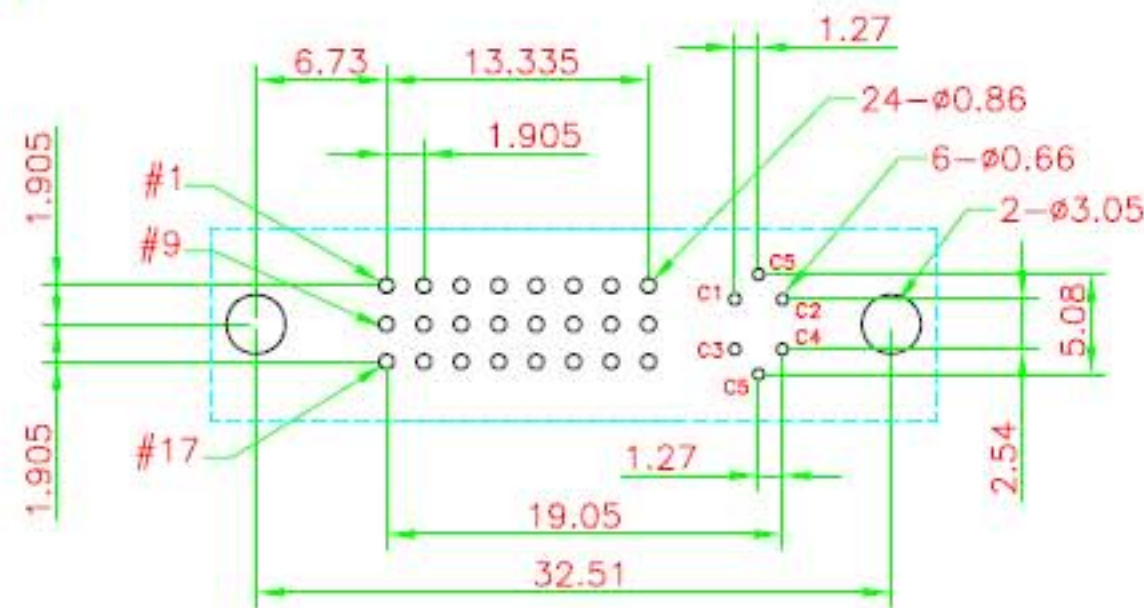

## PCB LAYOUT

UNIT : mm

JKL TECHNOLOGY CO., LTD.

WWW.JKL-TECH.COM.TW

MODEL NAME:

DVI PCB STRAIGHT FEMALE  
29PIN(ANALOG/DIGITAL)

| SELECT<br>DIM TOL | 1    | 2    | 3    | EXTRA |
|-------------------|------|------|------|-------|
| 0.000             | 0.05 | 0.05 | 0.10 |       |
| 0.00              | 0.10 | 0.15 | 0.20 | ✓     |
| 0.0               | 0.15 | 0.25 | 0.30 | ✓     |
| 0.                | 0.25 | 0.30 | 0.40 | ✓     |
| ANGLE             | 1.0° | 3.0° | 5.0° | ✓     |

PART NO. DVIA-29S-B

APPROVED BY:

FILE NO. FIG01272

CHECKED BY:

SCALE: FREE

DRAW BY:

KAO

DATE : 920414