


REV	DATE	DESCRIPTION
A	04/14/'03	

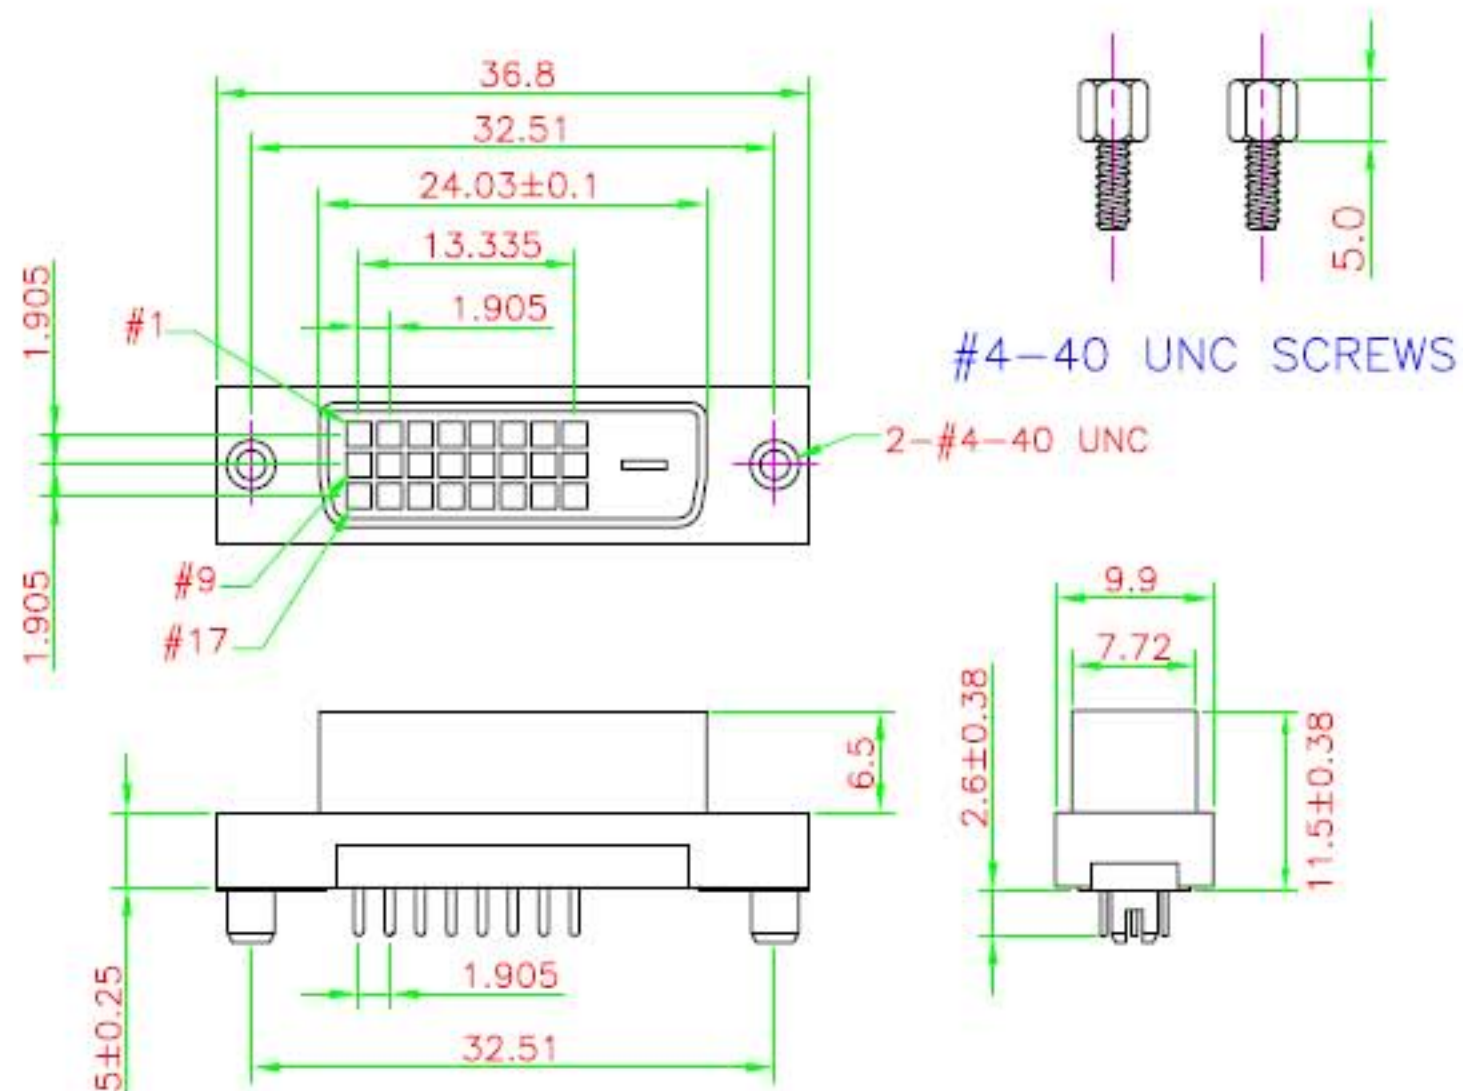

MATERIALS:

HOUSING: GLASS FILLED THERMOPLASTIC
UL94V-0

CONTACT: PHOSPHOR BRONZE,
GOLD FLASH

SHELL: ZINC ALLOY,
NICKEL PLATED

TEMPERATURE RANGE: -20°C to +85°C


ELECTRICAL:

Voltage rating: 500VAC. R.M.S.

Current rating: 1.5 AMP

Insulation resistance:
1000 Megohms Min.

Contact resistance:
20milliohms MAX. (initial)

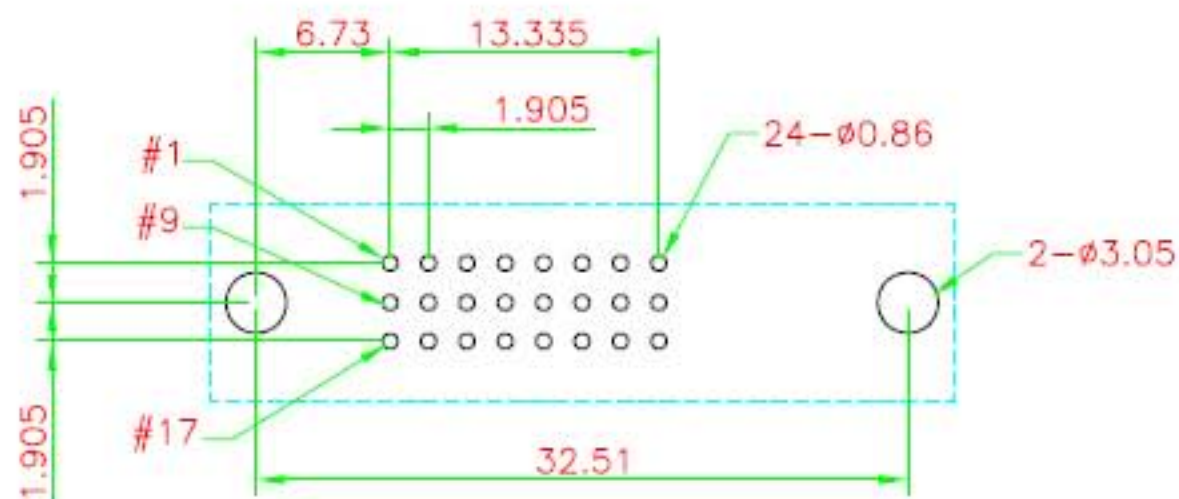

PCB LAYOUT

UNIT : mm

JKL TECHNOLOGY CO., LTD.
WWW.JKL-TECH.COM.TW

MODEL NAME:

DVI PCB STRAIGHT FEMALE
24PIN (DIGITAL)

SELECT	1	2	3	EXTRA
DIM TOL	0.000	0.05	0.05	0.10
	0.00	0.10	0.15	0.20
	0.0	0.15	0.25	0.30
	0.	0.25	0.30	0.40
ANGLE	1.0°	3.0°	5.0°	

PART NO. DVIA-24S-B

APPROVED BY:

FILE NO. FIG01271

CHECKED BY:

SCALE: FREE

DRAW BY:

KAO

DATE : 920414