

Recommend P.C.B Layout

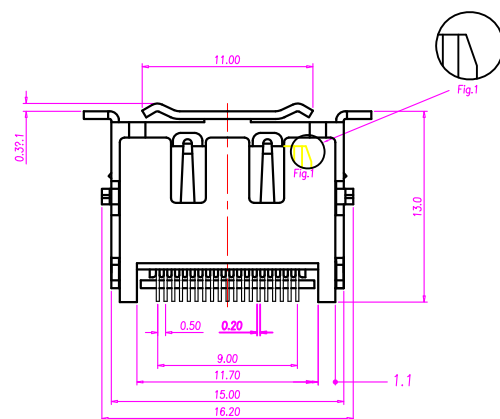
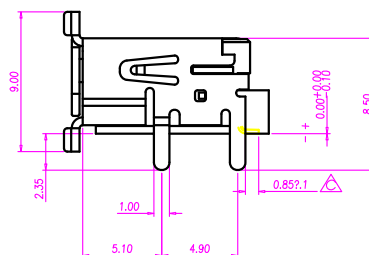
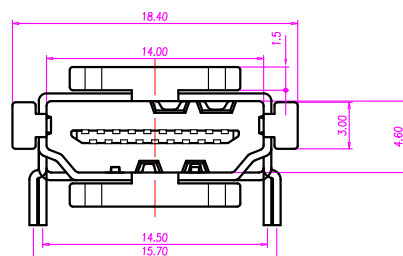


TABLE B

HM-19F4-39	HDMI 19PIN SMT (JAE)	金 15u"/GOLD 15u"	鍍亮錫
HM-19F4-20	HDMI 19PIN SMT (JAE)	金 15u"/GOLD 15u"	鍍霧錫
HM-19F4-03	HDMI 19PIN SMT (JAE)	金 30u"/GOLD 30u"	鍍霧錫
Part No.	DESCRIPTION	Contact Plating	Shield Plating

NOTE:

Material

Housing: LCP, UL 94V-0 Rated; Color: Black.

Shield: PHOSPHOR BRONZE

Plating: SEE TABLE B

Contact: Bronze

Plating: SEE TABLE B.

Electrical

Contact resistance: Contact 30m ohm max.

Shell 50m ohm max.

Insulation resistance: unmated 100M ohm min.
mated 10M ohm min.


Dielectric strength: 500 VAC min.

Current rating: 0.5A min.

BOM	
19	CONTACT
1	SHELL
1	HOUSING
數量	零件

△	Change P.C.B Layout.	Stewart	Frank	03/19/07"
△	外觀改變	KU		03/08/07"
△	Release P.C.B Layout.	Stewart	Frank	03/06/07"
△	材質變更	REN		03/05/07"
REV.	DESCRIPTION	CHANGE. BY	APPVL. BY	DATE

繪圖 DRAW. BY	WEI	日期 DATE	04/06/07	單位 UNIT	mm	一般公差
核準 APPVL. BY	Frank	版本 VERSION	D	比例 SCALE	1:1	.x ±0.25 .xx ±0.10



JKL TECHNOLOGY CO., LTD.

品名 ITEM	HDMI 19PIN SMT (JAE)			SHEET
料號 PART NO.	TABLE B	圖號 DWG NO.	QC1587	SIZE A4