


Kabelschuhe


Terminals

Lötfreie Kabelschuhe mit Polyamid-Hülsen Solderless terminals, Polyamide insulated

Kennfarbe Isolation Colour code insulation	Artikel-Nummer	Leiter- querschnitt	Bolzen	Abmessungen mm							Verp.-Einh.
	Part number	Wire size	Stud	Dimensions mm							Stück
		mm² AWG	M	S	Ø d 1	d 3	Ø d 4	L	a	r	Standard packing Piece
gelb yellow	RSY 7180 C 3-0,5	0,1-0,5 26-22	3	0,5	1,0	5,2	2,0	10	4,0	4,5	2000
rot red	RSY 7103 C 3-1	> 0,5-1,5	3	0,8	-	6,0	4,1	17	-	-	1000
	RSY 7103 C 3,5-1	20-16	3,5	0,8	-	6,0	4,1	17	-	-	1000
	RSY 7104 C 4-1		4	0,8	-	8,0	4,1	18	-	-	1000
	RSY 7105 C 5-1		5	0,8	-	10,0	4,1	19	-	-	1000
blau blue	RSY 7159 C 3-2,5	> 1,5-2,5	3	0,8	-	6,0	4,5	17	-	-	1000
	RSY 7108 C 4-2,5	14	4	0,8	-	8,0	4,5	18	-	-	1000
	RSY 7109 C 5-2,5		5	0,8	-	10,0	4,5	20	-	-	1000
	RSY 7110 C 6-2,5		6	0,8	-	11,0	4,5	22	-	-	1000
gelb yellow	RSY 7155 C 4-6	> 4-6	4	1,0	-	8,0	6,5	21	-	-	1000
	RSY 7112 C 5-6	10	5	1,0	-	10,0	6,5	22	-	-	1000
	RSY 7114 C 6-6		6	1,0	-	11,0	6,5	23	-	-	1000

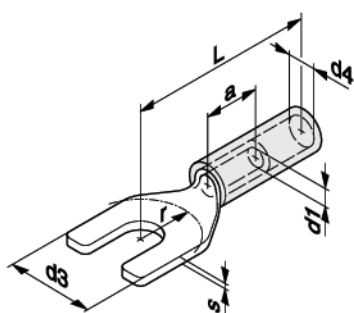

Material: SE-Cu, galv. verzinkt
Material: electrolytic copper, electro-tinned

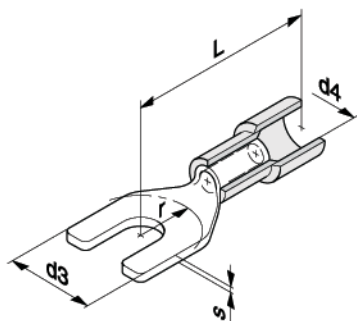

Material: SE-Cu, galv. verzinkt
Material: electrolytic copper, electro-tinned