


Stiftkabelschuhe


Pin terminals

Lötfreie Stiftkabelschuhe ohne Isolation Solderless pin terminals, non insulated

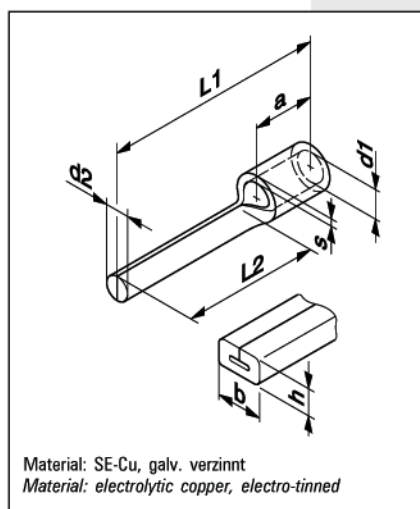

Artikel-Nummer Part number	ähnlich similar to DIN 46230	Leiter- querschnitt Wire size mm ² AWG	Abmessungen mm Dimensions mm								Verp.-Einh. Stück Standard packing Piece
			S	Ø d 1	Ø d 2	b	h	L 1	L 2 min.	a	
RSQ 5338-0,5	●	0,1-0,5 26-22	0,5	1,0	1,2	-	-	14,0	8	4,0	2000
RSQ 5338-1	●	0,5-1	0,8	1,6	1,9	-	-	17,3	10	5,0	2000
RSQ 5338.001-1		20-18	0,8	1,6	1,9	-	-	15,5	7	4,8	2000
RSQ 5338.002-1			0,8	1,6	1,9	-	-	13,5	5	4,8	2000
RSQ 5338-2,5	●	>1-2,5	0,8	2,3	1,9	-	-	17,0	10	4,8	2000
RSQ 5338.001-2,5		16-14	0,8	2,2	1,9	-	-	13,5	5	4,8	2000
RSQ 5338.002-2,5			0,8	2,3	1,9	-	-	22,0	14	5,0	2000
RSQ 5338-6	●	>2,5-6 12-10	1,0	3,3	2,7	-	-	20,0	10	6,1	1000
RSQ 5338-10	●	>6-10 8	1,1	4,5	-	4,3	2,4	22,0	12	8,0	1000
RSQ 5338-16	●	>10-16 6	1,2	5,8	-	5,5	2,6	26,0	13	10,0	500

Lötfreie Stiftkabelschuhe mit Polyamid-Hülsen Solderless pin terminals, Polyamide insulated

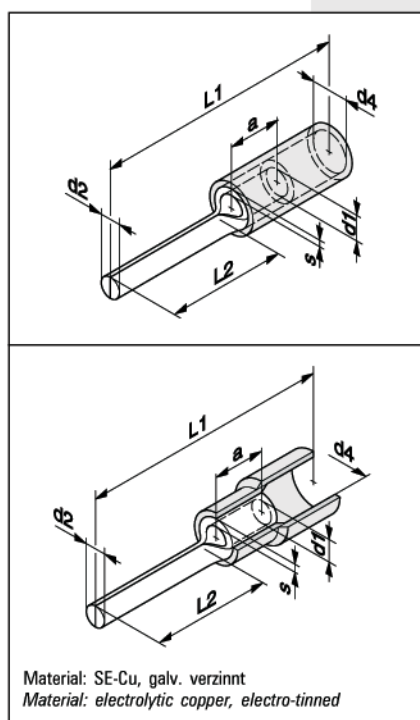

Kennfarbe Isolation Colour code insulation	Artikel-Nummer Part number	ähnlich similar to DIN 46231	Leiter- querschnitt Wire size mm ² AWG	Abmessungen mm querschnitt Dimensions mm								Verp.-Einh. Stück Standard packing Piece
				S	Ø d 1	Ø d 2	Ø d 4	L 1	L 2 min.	a		
gelb yellow	RSY 5338-0,5		0,1-0,25 26-24	0,5	1,0	1,4	2,0	18	8	4	2000	
rot red	RSY 5338-1 RSY 5338.001-1	●	0,5-1,5 20-16	0,8	1,6	1,9	3,2	22 20	10 8	5 5	1000 1000	
blau blue	RSY 5338-2,5 RSY 5338.001-2,5 RSY 5338.002-2,5	●	>1,5-2,5 14	0,8	2,3	1,9	4,3	23 18	10 5	5 5	1000 1000 1000	
gelb yellow	RSY 5338-6	●	>4-6 10	1,0	3,6	2,7	6,4	26	10	6	1000	