





50T 5.2 ϕ × 20

低分断能力玻璃保险丝管(慢断型)

LOW-BREAKING CAPACITY GLASS TUBE FUSE (TIME-LAG)

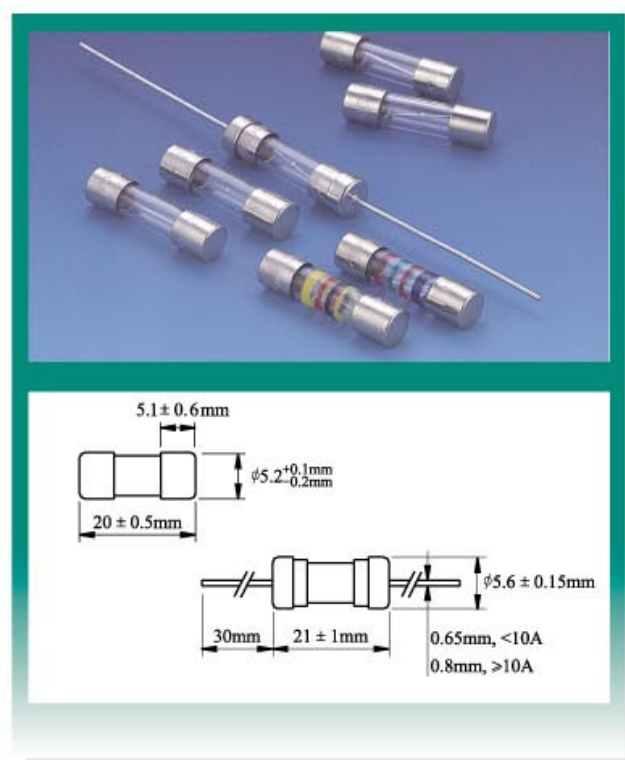

50T RoHS I-T CHARACTERISTICS CURVE
50T RoHS 电流-时间曲线图

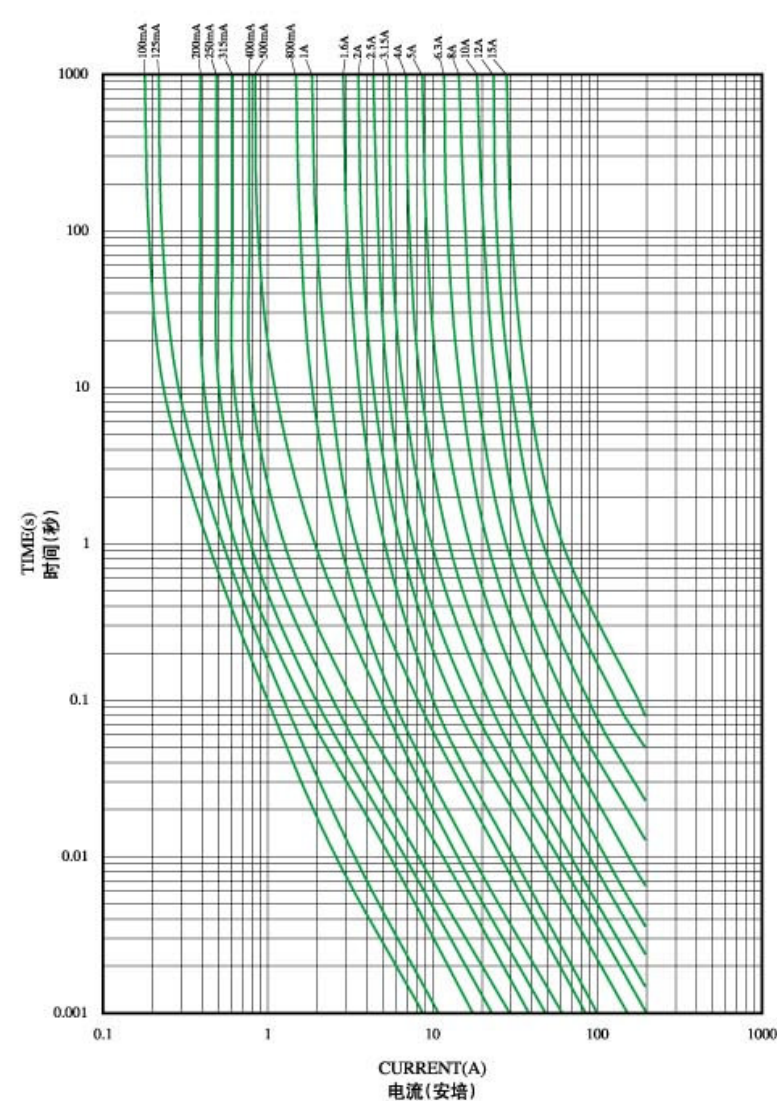[illegible]

H DENOTES FOR 250V (H表示 250V)

● DENOTES FOR APPROVED (●表示已取得认证)

分断电流:

BREAKING CAPACITY:
35A OR $10I_n$ WHICHEVER IS GREATER

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME	
		32-100mA	125mA-15A
2.1In	Max (最慢)	2min	2min
2.75In	Min (最快)	200ms	600ms
	Max (最慢)	10sec	10sec
4In	Min (最快)	40ms	150ms
	Max (最慢)	3sec	3sec
10In	Min (最快)	10ms	20ms
	Max (最慢)	300ms	300ms

