


## T-1 3/4(5mm) ROUND LED LAMP

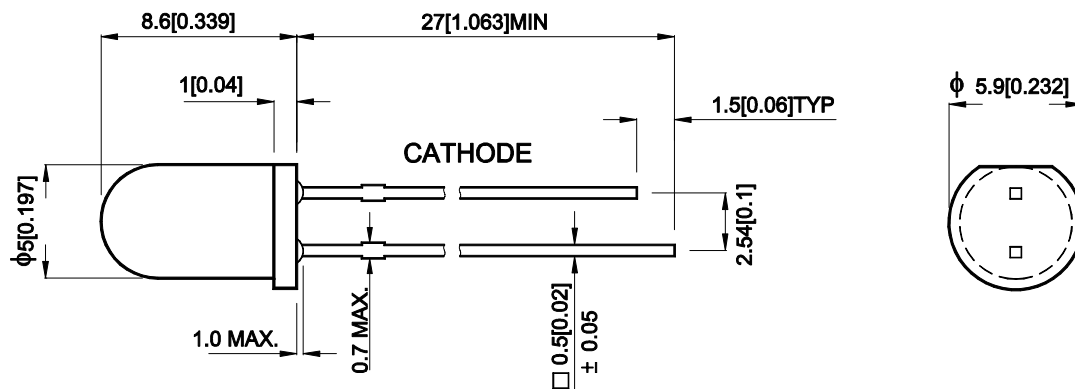

UNIT : MM[INCH]

TOLERANCE :  $\pm 0.25[\pm 0.01]$  UNLESS OTHERWISE NOTED

## \* Absolute Maximum Ratings

Item	Symbol	Rating	Unit
Forward Current	$I_F$	25	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	$P_O$	105	mW
Operating Temperature	$T_{opr}$	-40~+85	° C
Storage Temperature	$T_{stg}$	-40~+85	° C

\* Electrical and Optical Characteristics ( $T_A=25^\circ \text{C}$ )

Item	Symbol	Condition	Min.	Typ.	Max.	UNIT
Forward Voltage	$V_F$	$I_F=20\text{mA}$	-	2.25	2.5	V
Reverse Current	$I_R$	$V_R=5\text{V}$	-	10	-	$\mu\text{A}$
Peak Emission Wavelength	$\lambda_P$	$I_F=20\text{mA}$	-	565	-	nm
Spectral half-width	$\Delta\lambda$	$I_F=20\text{mA}$	-	25	-	nm
Capacitance	$C$	$V_F=0, f=1\text{MHz}$	-	20	-	pF

## Selection Guide

Part No.	Dice	Lens Type	$I_v$ (mcd) @20mA		Viewing Angle
			Min.	Typ.	$2\theta 1/2$
L-7113MGC	GREEN (InGaAlP)	WATER CLEAR	700	1000	20°

APPROVED:

J.Lu

CHECKED:

L.Mei

DRAWN :

L.N. Sheu

SCALE :

3 : 1

DATA NO. : F3881

DATE : MAR/06/2000