

Part Number: KT-2520ZG25Z1S

Green







ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

Features

- Dimension: 2.5mmx 2.0mm x 0.8mm.
- Low thermal resistance.
- Ceramic package with silicone resin.
- Small package with high efficiency.
- Surface mount technology.
- ESD protection.
- Package : 2000pcs / reel.
- Moisture sensitivity level : level 2a.
- Soldering methods: IR reflow soldering.
- RoHS compliant.

Package Dimensions

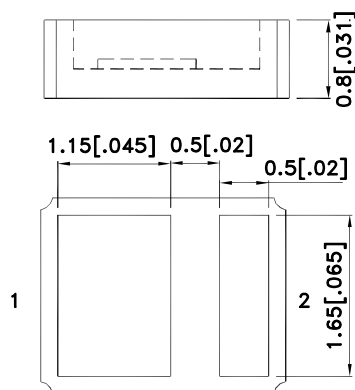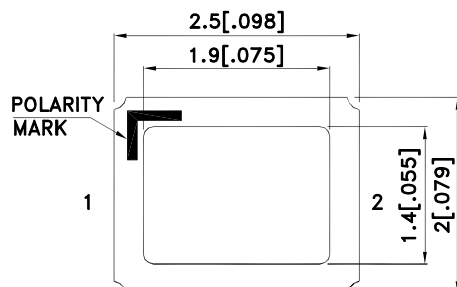

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.




Handling Precautions



Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools.



2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.




3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



- 4.1. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.

- 4.2. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.

- 4.3. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



5. As silicone encapsulation is permeable to gases, some corrosive substances such as H_2S might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.

Selection Guide

Part No.	Dice	luminous Intensity [2] Iv(mcd)@ 150mA		Φ_v (mlm) [2] @ 150mA		Viewing Angle [1]
		Min.	Typ.	Min.	Typ.	2 θ 1/2
KT-2520ZG25Z1S	Green (InGaN)	3600	5000	17000	24000	120 °

Notes:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Luminous intensity/ luminous Flux: +/-15%.

Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Value	Unit
Power dissipation	P _D	600	mW
Junction temperature[1]	T _J	110	°C
Operating Temperature	T _{op}	-40 To +100	°C
Storage Temperature	T _{stg}	-40 To +110	°C
Reverse Voltage	V _R	5	V
DC Forward Current [1]	I _F	150	mA
Peak Forward Current [2]	I _{FM}	300	mA
Thermal resistance [1]	R _{th j-a}	170	°C/W
Thermal resistance [1] (Junction/solder point)	R _{th j-s}	50	°C/W
Electrostatic Discharge Threshold (HBM)		8000	V

Notes:

1. Results from mounting on PC board FR4, mounted on pc board-metal core PCB is recommend for lowest thermal resistance.
2. 1/10 Duty Cycle, 0.1ms Pulse Width.

Electrical / Optical Characteristics at TA=25°C







Parameter	Symbol	Value	Unit
Forward Voltage I _F = 150mA [Min.]	V _F [2]	2.9	V
Forward Voltage I _F = 150mA [Typ.]		3.5	
Forward Voltage I _F = 150mA [Max.]		4.0	
Allowable Reverse Current [Max.]	I _R	85	mA
Wavelength at peak emission I _F = 150mA [Typ.]	λ peak	515	nm
Dominant Wavelength I _F = 150mA [Typ.]	λ dom [1]	525	nm
Spectral bandwidth at 50% $\Phi_{REL MAX}$ I _F = 150mA [Typ.]	$\Delta\lambda$	30	nm
Temperature coefficient of λ peak I _F = 150mA, - 10 ° C ≤ T ≤ 100 ° C [Typ.]	TC λ peak	0.09	nm/°C
Temperature coefficient of λ dom I _F = 150mA, - 10 ° C ≤ T ≤ 100 ° C [Typ.]	TC λ dom	0.03	nm/°C
Temperature coefficient of V _F I _F = 150mA, - 10 ° C ≤ T ≤ 100 ° C [Typ.]	TC _V	-2.7	mV/°C




Notes:

1. Wavelength : + / - 1nm.
2. Forward Voltage : + / - 0.1V.

Green

KT-2520ZG25Z1S

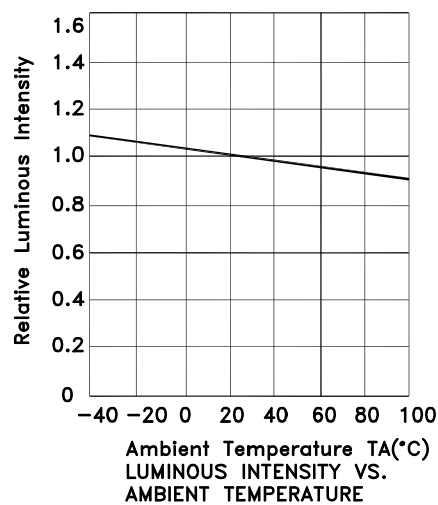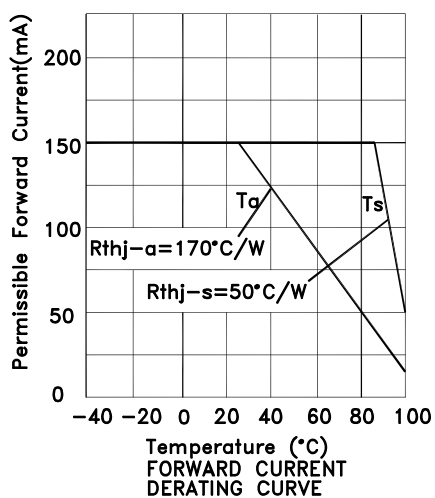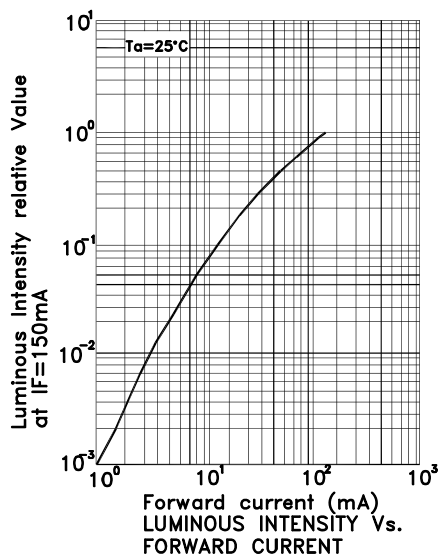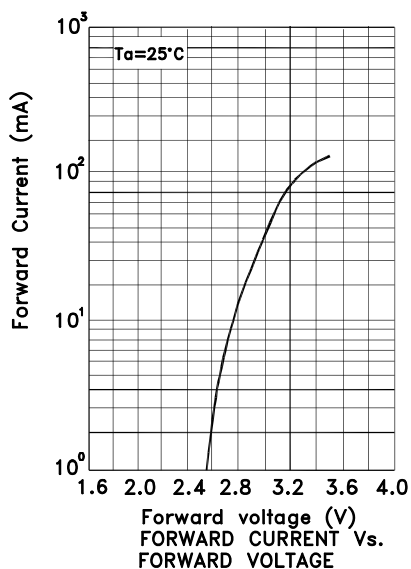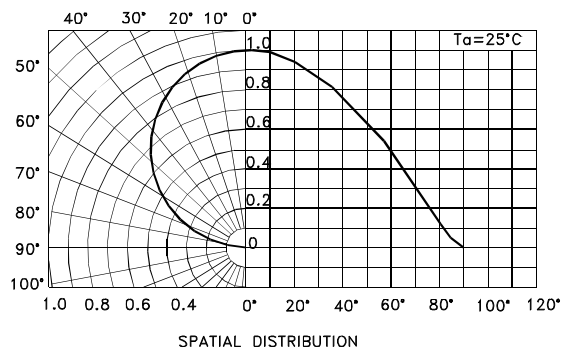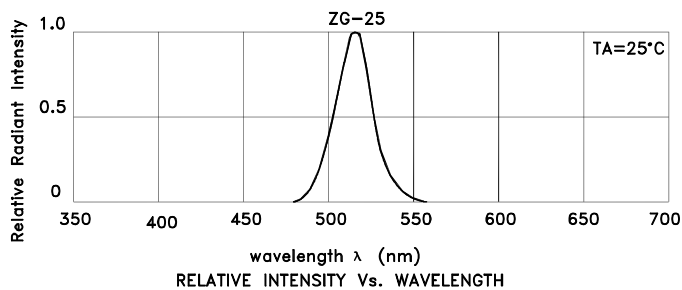


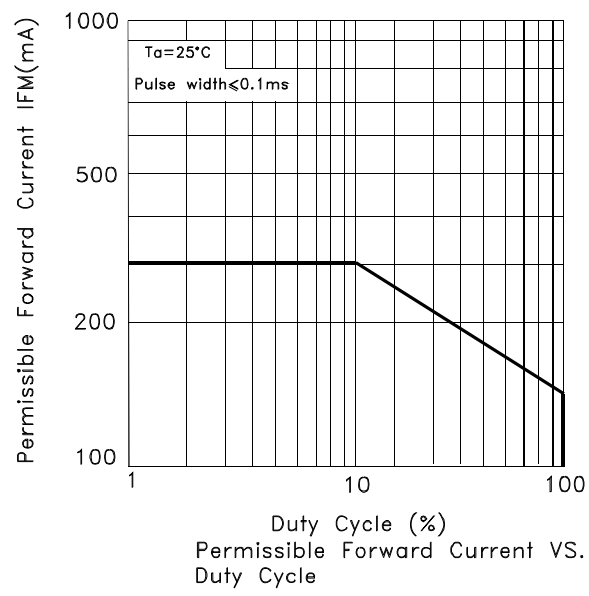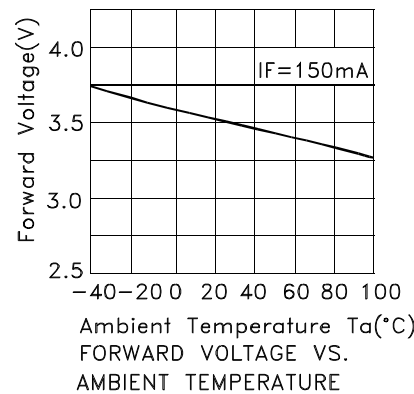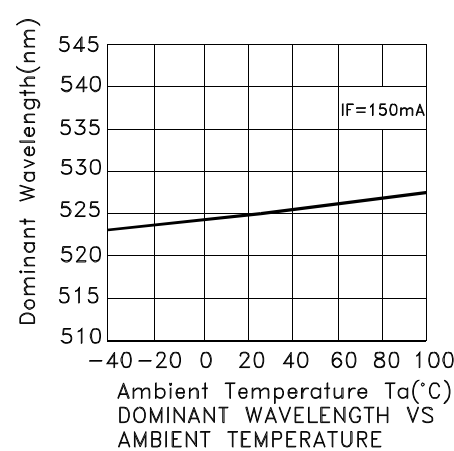

KT-2520ZG25Z1S

Reflow soldering is recommended and the soldering profile is shown below.
Other soldering methods are not recommended as they might cause damage to the product.


Reflow Soldering Profile For Lead-free SMT Process.

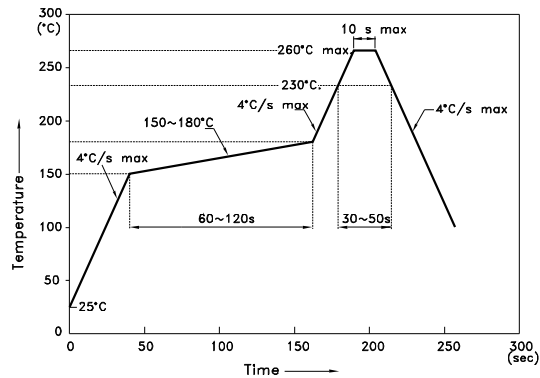



NOTES:

1. We recommend the reflow temperature 245°C (+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

Reel Dimension

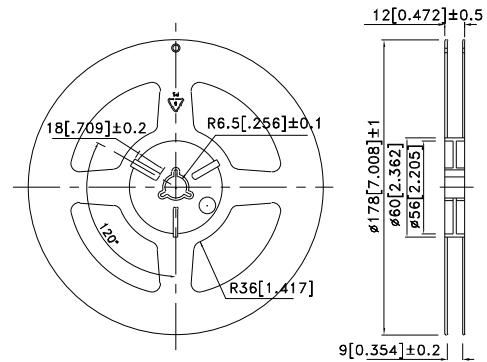


Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

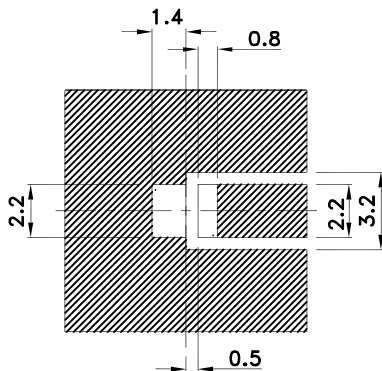


Solder resist


Tape Specifications (Units : mm)

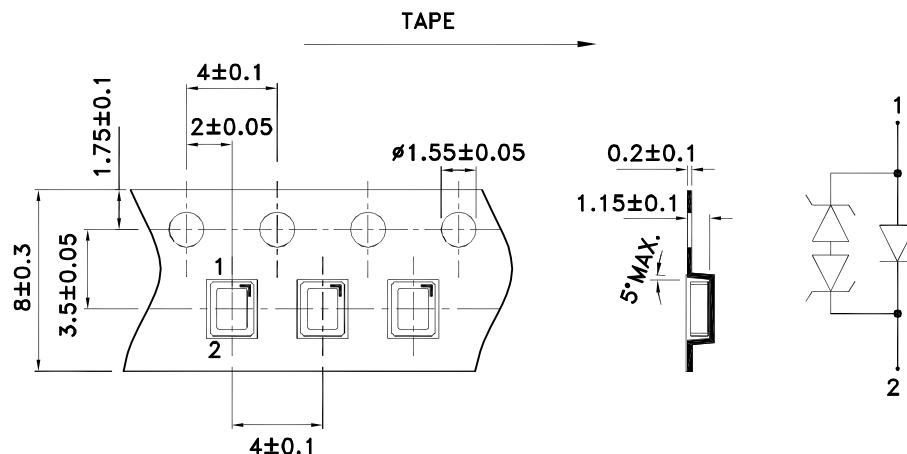

PACKING & LABEL SPECIFICATIONS

KT-2520ZG25Z1S

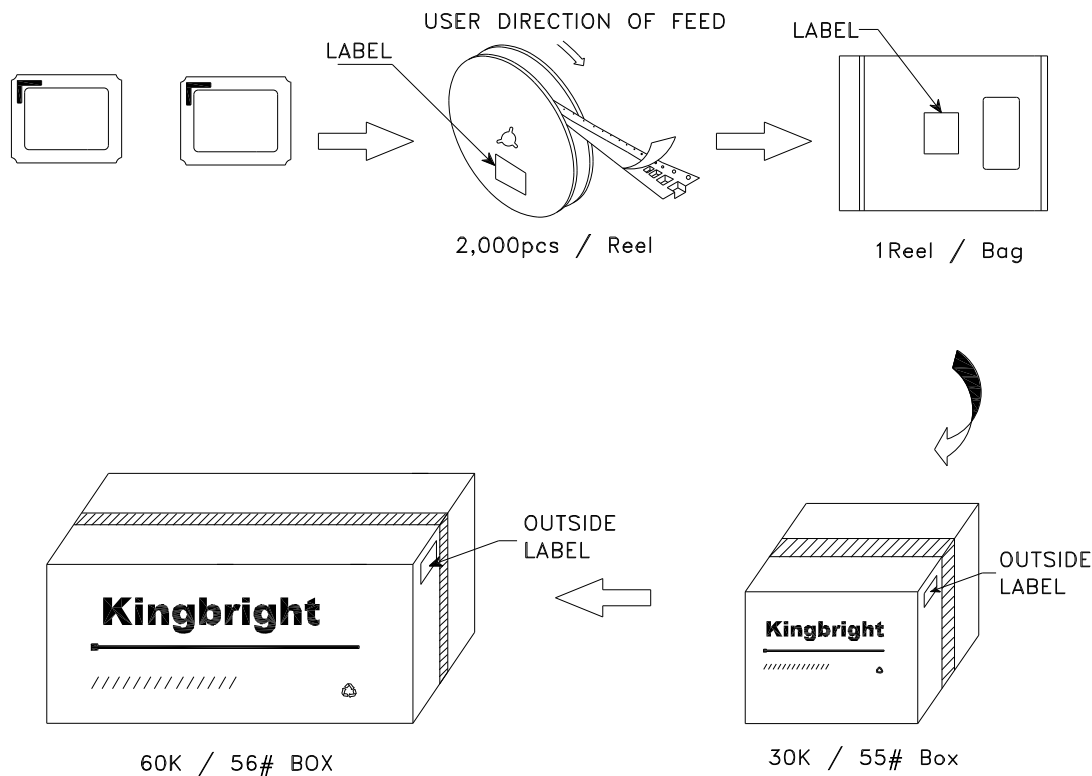

Kingbright	
P/NO: KT-2520xxx	
QTY: 2,000 pcs	Q.C. <div>Q C xx-xx-xxxx PASSED</div>
S/N: XXXX	
CODE: XXX	
LOT NO:	
 xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx	
RoHS Compliant	