



Four (4) Fibers Detachable Extender, HDFX-150-TR

Description

OPTICIS optical HDMI extender, **HDFX-150-TR** is designed compact enough to be fitted into various installation environments with four (4) LC fibers connection. The transmitter and receiver set, HDFX-150-TR enables to transmit WUXGA (1920x1200) or 1080p at 60Hz signal up to 300m (985feet) over four (4) LC multi-mode fibers, avoiding any tricks like scaling or data compression for lessening a burden of data transmission and supports 3D contents transmission.

Between the transmitter and the receiver, pure fiber connection by four (4) LC fibers connector gives clean, secure and easy installation with no electrical hazard and a perfect electrical isolation. The HDFX-150-TR can be operated by USB power without external DC power adapter by plugging the supplied USB to DC plug cables to each module.

It passes CEC, EDID & HDCP (High Definition Contents Protection) for better installation flexibility and compatibility.

In shipping group, two (2) short HDMI cables are also included so as to be mated to various types of HDMI connectors.

Specification

- Extends WUXGA (1920x1200) at 60Hz or 1080p at 60Hz (36bit, 2.25Gbps/ch).
- Transmits HDMI data up to 300m (985feet) over four (4) LC multi-mode fibers
- Supports HDMI1.3, 36-bit color depth
- Has HDMI receptacle and provides intermediate cable for flexible installation
- Supports Auto-power switching (Tx)
- Operated by USB power or DC power supplier
- Complies with CEC, EDID & HDCP
- Includes one (1) +5V, 1A DC power adapter / two (2) USB to DC plug cables for the transmitter and receiver
- Size (WDH): 67 x 46 x 14mm
- Certifies FCC and CE standards for EMI/RFI emission
- Certifications: CE / FCC, Class 1 LASER Eye Safety

Applications

- Home AV
- Control room
- Conference room


Four (4) Fibers Detachable Extender, HAFX-150-TR

Technical Features


Resolution	Up to WUXGA or 1080P at 60Hz, 36bit
Bit rate	Up to 2.25Gbps
Maximum distance	300m (985feet) @WUXGA, 60Hz with 50/125um fiber
Fiber	LC terminated 4 core multi-mode fibers
Power supplying	TX: HDMI source, External 5V/1A DC power or USB cable RX: External 5V/1A DC Power or USB cable
LED Indicators	TX: Power, Signal transmission RX: Power, Signal detection
Power consumption	TX: 1.5W, RX: 1.9W
Size (WDH)	67 x 46 x 14mm
Operating temperature	0 ~ 50℃
Operating Humid.	10 to 85% RH, non-condensing

Dimension

67 x 46 x 14mm (WDH)

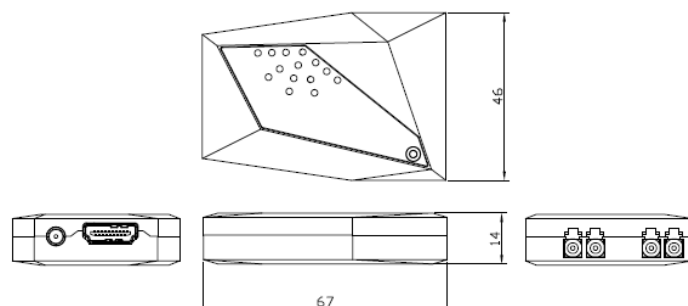

Connection Diagram

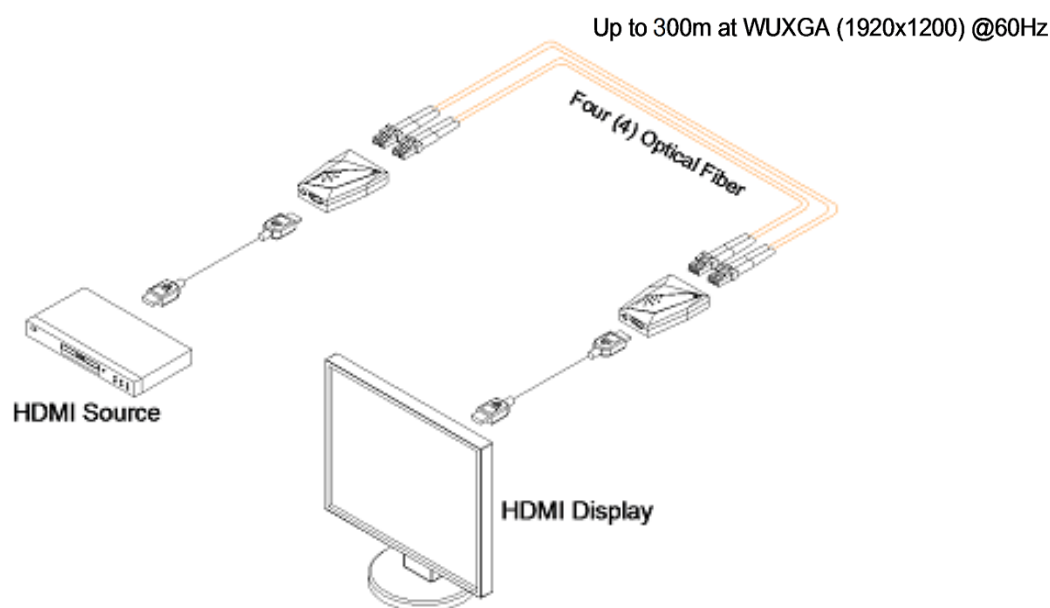

Opticis Co., Ltd.
7F, 166, Jeongjail-ro, Bundang-gu
Sungnam-si, Gyunggi-do, 13558 South Korea
Tel: +82 (31) 719-8033
Fax: +82 (31) 719-8032

tosales@opticis.com

All contents are subject to be changed without prior notice.

