

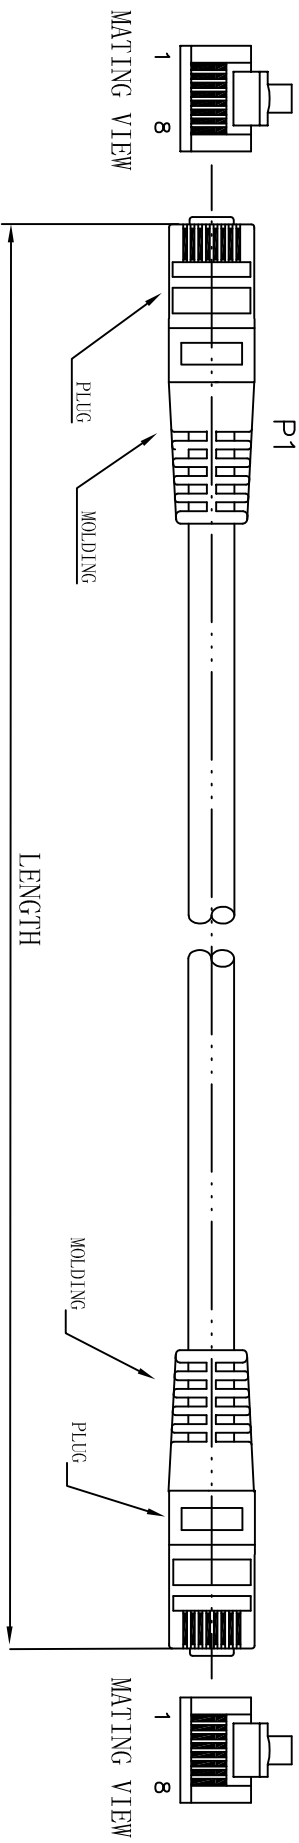


DATE	REV	DESCRIPTION	BY	CHKD



Marking<LP248> CAT. 5E UTP 4PR 26AWG PATCH CABLE ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 3P VERIFIED

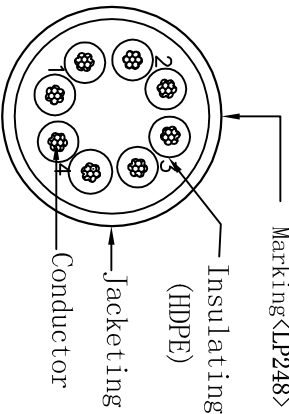


orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PINOUT				
PA/R	P1(T568B)	WIRE	P2(T568B)	
1	1	WHT/ORG	1	
	2	ORG	2	
	3	WHT/GRN	3	
2	6	GRN	6	
	4	BLU	4	
	5	WHT/BLU	5	
3	7	WHT/BRN	7	
	8	BRN	8	

Conductor	Base Copper 26AWG 7/0.152±0.05mm
Insulation	Thickness:MIN at any point0.15mm MAX AVG0.20mm Diameter0.75±0.06mm
Jacketing PVC	Thickness:MIN at any point0.65mm MAX AVG0.75mm Diameter5.3±0.2mm

WIRE	CAT. 5E UTP STR 26AWG*4P
PLUG	YUS-06 8P8C 3U"
Length	
COLOR	RAL 7045

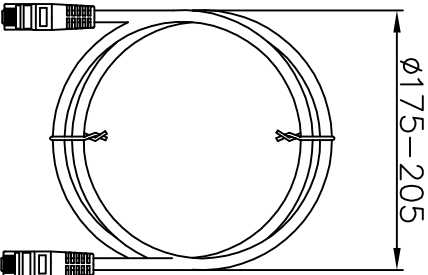

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XX	± 0.05



DRAW. NO	ITEM	IB49xx	
DEPARTMENT	DRAW		DRAW 2008/3/11
SCALE	CHECKER		DRAW
UNIT	APPROVAL		DRAW
3RD			