
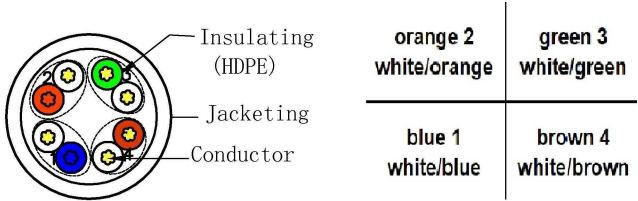


DATE	REV	DESCRIPTION	BY	CHKD
21/02	A/0	NEW	LIU SHUO	JJJ

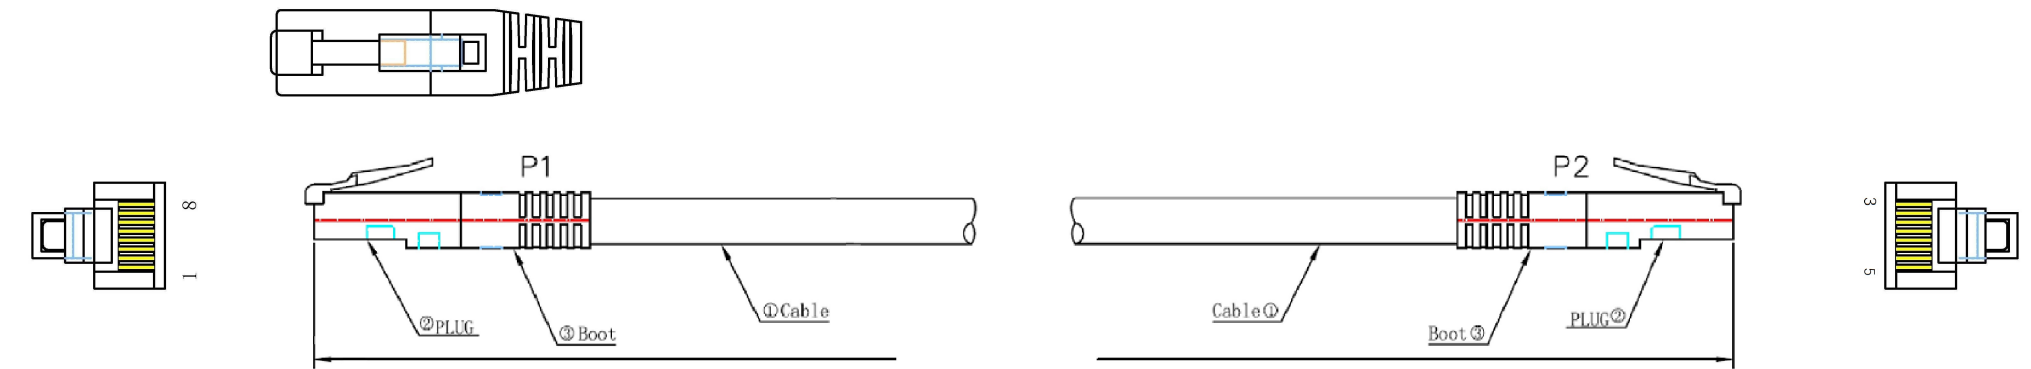

Marking: CE 17 ACT Cat6 U/UTP CU PVC 4X2XAWG24/7 C(UL)US
CMX E477294-24100 IEC 60332-1-2 ANSI/TIA-568.2-D ISO/IEC
11801 Class E EN 50288 MM/DD/YY *****M

CABLE ①	
conductor	24AWG stranded bare copper
insulation	HDPE
core size	min:0.94mm, max:1.06mm
core color	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown
cable diameter	5.3±0.3mm
sheath material	PVC RAL9011
Plug ②	
housing	polycarbonate UL94V-2 or as customer requirement
color	transparent
contact blade	phosphor bronze
gold plating	50u"
MOLDED ③	
material	PVC RAL3031

PINOUT				
PA/R	P1(T568B)	WIRE	P2(special)	WIRE
1	1	WHT/ORG	3	WHT/GRN
	2	ORG	6	GRN
2	3	WHT/GRN	1	WHT/ORG
	6	GRN	7	WHT/BRN
3	4	BLU	8	BRN
	5	WHT/BLU	2	ORG
4	7	WHT/BRN	4	BLU
	8	BRN	5	WHT/BLU

RoHS COMPLIANT

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XX	± 0.05

3RD

ACT					
DRAW. NO		ITEM	U/UTP CAT6 AWG24 PVC PATCH CORD (IB81XX)		
CABLE CODE		DRAW	LIU SHUO	DATE	21/02/19
SCALE		CHECKER	JJJ	APPROVAL	
UNIT	MM	SHEET	1 OF 1		