

- * QC Important Dimension
- * Waterproof Rate: IP65(MOLDING)
- * Waterproof Rate: IP68(M12)
(Under Water 1M 24 hours)
- * Pin: Copper Alloy, Gold Plated
- * Nut: Zinc Alloy, Nickel Plated
- * Shield: Copper Alloy,Nickel Plated
- * O-Ring1: Viton,Black.
- * O-Ring2: Viton,Green.
- * Jack: PBT,Black.
- * Housing: Nylon+GF,Black.
- * Panel Thickness Max: 5.0mm


DRAWN BY	Lu Di	DATE	2013/01/17
CHECKED BY	Mafei	DATE	2013/01/17
APPROVED BY	Victor	DATE	2013/01/17

1	2	3	4	5	6	7	8	
F								THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.
E								
D								
C								
B								
A								


ALTW
CONFIDENTIAL

2013.01.17


R&D DEPT.



⑤ ZIPPER BAG

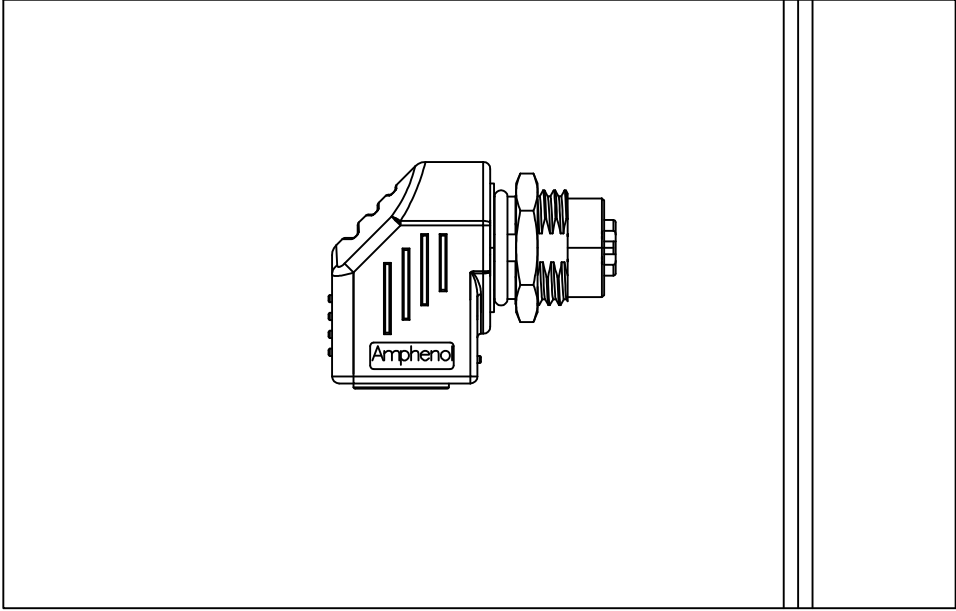

* 1 Product With 1 Zipper Bag

UNIT:mm		TITLE Adapter M12 To RJ, RIGHT ANGLE			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO RJS-12D04FF-RS8001	DRAWN BY Lu Di	DATE 2013/01/17
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE Free		SHEET 2 OF 2		DWG NO RJS-12D04FF-RS8001	CHECKED BY Mafei	DATE 2013/01/17	
REV. A		SIZE A4		QC :Inspection Item		CUSTOMER ALTW	APPROVED BY Victor	DATE 2013/01/17	

1

2

3

4

5

6

7

8 FMWI0702-01-01A2