


REV.	REVISION	DATE



L±2"(L±50)

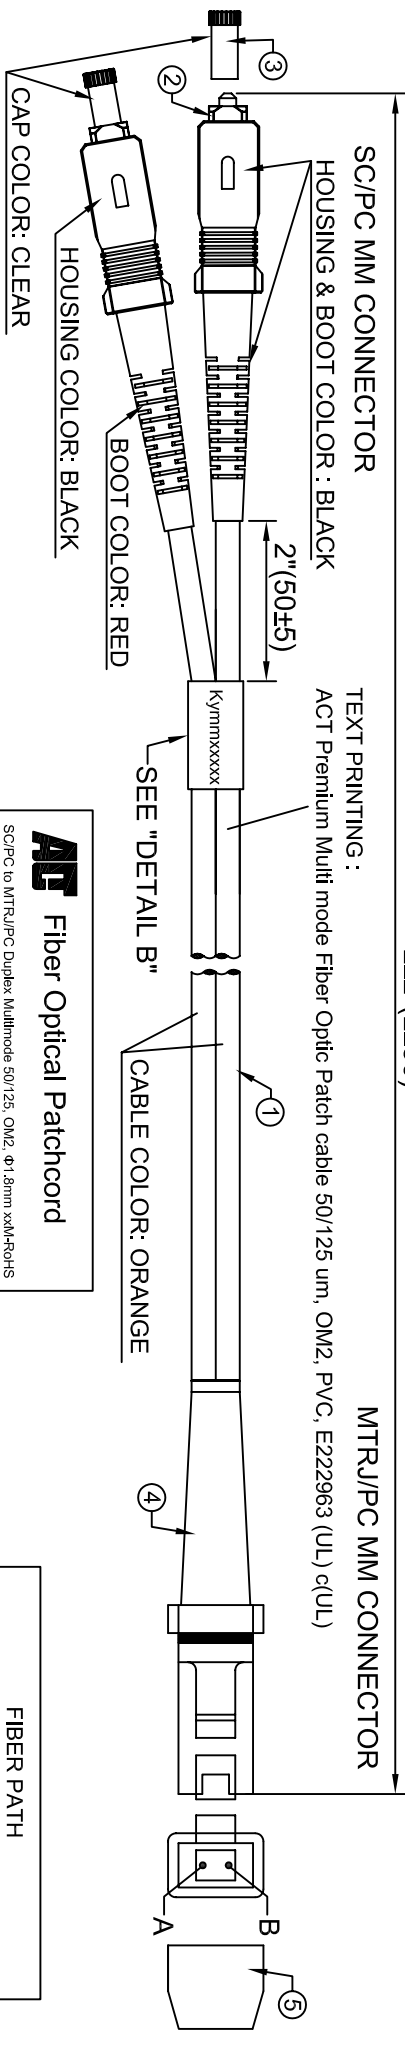

NOTE:

1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES
LARGE	POLYBAG	ALL
EACH LARGE POLYBAG IN AN OUTER CARTON		

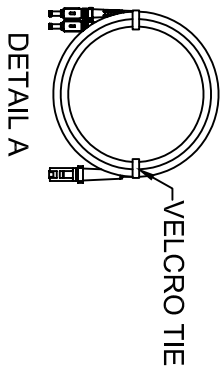

AG Fiber Optical Patchcord

SC/PC to MTRJ/PC Duplex Multimode 50/125, OM2, Ø1.8mm xxM-RoHS

Model: xxxxx -xxxxx

Lot number: _____

Performance: (@23℃) λ=850/1310±20nm

X X X X X X X X X X X X X X

Serial No

A	850nm	Insertion Loss ≤ 0.3dB
B		1310nm
C		

Kymmxxxx

D | |

PO/NO: _____

Prepared By: _____ Date: _____

SEE TABLE "DESCRIPTION 1"

SEE TABLE "DESCRIPTION 2"

FIBER PATH	
SC/PC CONNECTOR	MTRJ/PC CONNECTOR
SC(BLACK BOOT)	B
SC(RED BOOT)	A

RL5510	10	10	32.8"(10000)	743210-RL5510	8716065224092
RL5505	05	5	16.4"(5000)	743205-RL5505	8716065224085
RL5503	03	3	9.84"(3000)	743203-RL5503	8716065224078
RL5502	02	2	6.56"(2000)	743202-RL5502	8716065224061
RL5501	01	1	3.28"(1000)	743201-RL5501	8716065224054
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL: _____ DATE: _____



5	2PCS		MTRJ DUST COVER, BLACK.		UNIT:	TITLE: PATCHCORD SC-MTRJ MULTIMODE DUPLEX 50/125, OM2, 1.8mm, ORANGE.		
4	2SETS		CONNECTOR: MTRJ/PC MM BLACK HOUSING WITH BLACK BOOT.		Inches[mm]			
3	2PCS		SC DUST COVER, CLEAR.		DATE			
					2007/10/4			
2	2SETS		CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.	CHECKED BY	DATE	CUSTOMER	CUSTOMER PART NO.	
1	1PC		CABLE: MULTIMODE, 50/125um, 1.8mm ZIPCORD, OFNR, ORANGE JACKET.	APPROVED BY	DATE	DRAWING NO.	Ref. NO.	REV.
ITEM	QTY	PART NO.	DESCRIPTION	SALE BY	DATE	TRENDX PART NO.		
PART LIST								