

SPP85P30100D – SFP+ Dual Fibre **850nm / 300m / 10× Gigabit Ethernet**

#01 Overview

SPP85P30100D is a high performance transceiver module for up to 10× Gigabit Ethernet data links over a multimode fibre pair. The maximum reach¹ is 300m (50/125µm), with 5dB end of life (EOL) power budget. The transmitter is an 850nm VCSEL, the receiver is a PIN photodiode.

This transceiver module is compliant with the Small Form-factor Pluggable (SFP+) Multisource Agreement (MSA) and hot pluggable. Always contact Skylane Optics® commercial agents for compatibility with different equipment platforms.

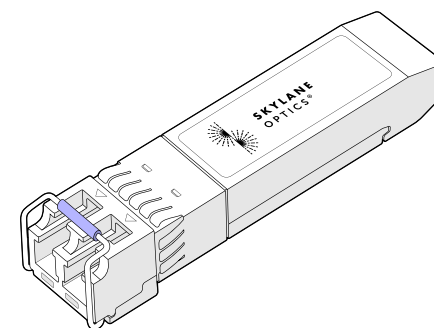


Figure 1. SFP+ Dual Fibre
(non-binding illustration)

Datasheet SPP85P30100D



#02 Features

- SFP+ Multi-Source Agreement compliant (SFF-8431)
- Hot pluggable SFP+ footprint
- Serial ID functionality supported according to (SFF-8472)
- Class 1 laser safety standard IEC 60825 compliant
- Dual LC connector
- 850nm VCSEL transmitter
- 300m point-to-point transmission on 50/125µm fibre
- Operating temperature range 0°C to 70°C
- Low power dissipation (<1W)
- Digital Diagnostics Monitoring (DDM)

#03 Applications

- 10× Gigabit Ethernet
- 8× Fiber Channel
- 4× Fiber Channel
- 2× Fiber Channel

#04 Optical Interface

P/N	SPP85P30100D
Wavelength [nm]	850
Optical Output Power ² [dBm]	-6 to -1
Receiver Sensitivity ³ [dBm]	≤ -11
Dispersion Penalty [dB]	3.9
Receiver Overload ⁴ [dBm]	-1
Power Budget ² [dB]	≥ 5

1. Distance is estimated assuming typical optical losses after decent quality fibre deployment; Only optical budget value is guaranteed.

2. EOL, over operating temperature range

3. Measured with 10.3125Gbps PRBS 231-1, BER≤10⁻¹²

4. The optical input to the receiver should not exceed this value. Transmitters must never be directly connected to receivers (optical loop back) before ensuring that proper optical attenuation is used

Datasheet SPP85P30100D



#05 Technical Parameters

5.1. Recommended Operating Conditions

Parameter	Min	Typ	Max	Unit	Notes
Storage temperature	-40		85	°C	
Operating Case Temperature	0		70	°C	
Relative Humidity	5		95	%	Non condensing
Power Supply Voltage	3.15	3.3	3.45	V	
Power Supply Current			300	mA	

5.2. Transmitter Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Average Output Power	-6		-1	dBm	5
Centre Wavelength	840	850	860	nm	
Spectral Width (-20dB)			0.45	nm	
Extinction Ratio	3	5		dB	
Dispersion Penalty			3.9	dB	

5.3. Receiver Optical Specifications

Parameter	Min	Typ	Max	Unit	Notes
Receiver Sensitivity			-11	dBm	6
Receiver Overload	-1			dBm	6
Receiver Operating Range	840	850	860	nm	

5. Output power coupled into a 9/125 µm single-mode fibre

6. Measured with 10.3125Gbps PRBS 2³¹-1, BER≤10⁻¹²



#06 Transceiver Electrical Pad Layout

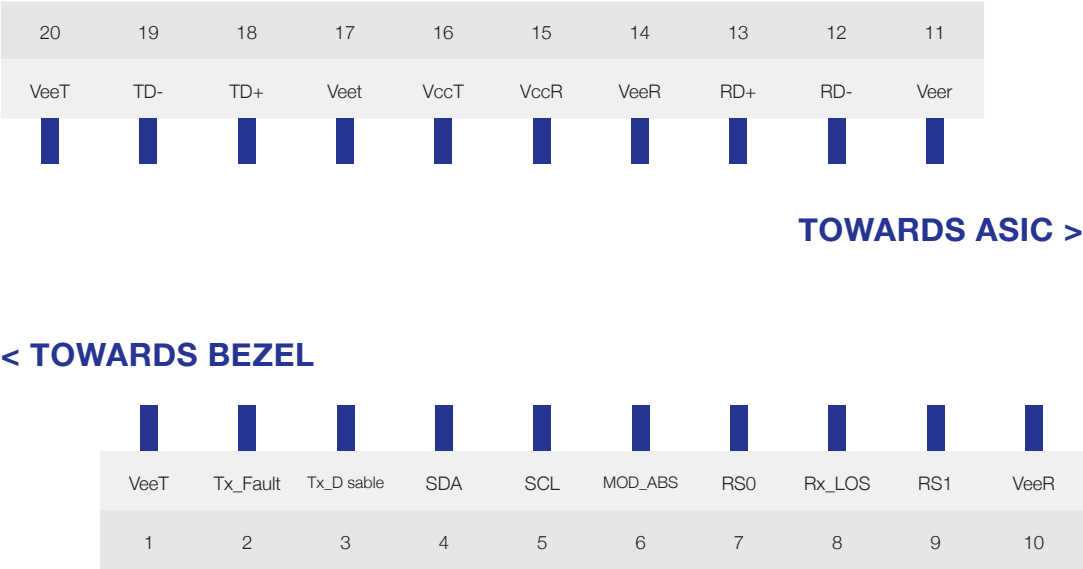


Figure 2. Transceiver Electrical Pad Layout

Datasheet SPP85P30100D



#07 Module Electrical Pin Definition

SFP+ MSA (SFF-8431)

Pin	Symbol	Description	Pin	Symbol	Description
1	VeeT	Module Transmitter Ground	11	VeeR	Module Receiver Ground
2	Tx_Fault	Module Transmitter Fault	12	RD-	Receiver Inverted Data Output
3	Tx_Disable	Transmitter Disable	13	RD+	Receiver Non-Inverted Data Output
4	SDA	2-Wire Serial Interface Data	14	VeeR	Module Receiver Ground
5	SCL	2-Wire Serial Interface Clock	15	VccR	Module Receiver 3.3V Supply
6	Mod_ABS	Module Absent	16	VccT	Module Transmitter 3.3V Supply
7	RS0	Rate Select 0	17	VeeT	Module Transmitter Ground
8	Rx_LOS	Receiver Loss of Signal	18	TD+	Transmitter Non-Inverted Data Input
9	RS1	Not Used	19	TD-	Transmitter Inverted Data Input
10	VeeR	Module Receiver Ground	20	VeeT	Module Transmitter Ground

Datasheet SPP85P30100D



#08 EEPROM - SFP+ MSA (SFF-8472)

A0H			A2H		
		2 wire address 1010000x			2 wire address 1010001x
0	Serial ID Defined by SFP MSA	(96 Bytes)	0	Alarm and Warning-Thresholds	(56 Bytes)
95	Vendor Specifics	(32 Bytes)	55	Cal Constants	(40 Bytes)
127	Reserved	(128 Bytes)	95	Real Time Diagnostic Interface	(24 Bytes)
255			119	Vendor Specifics	(8 Bytes)
			127	User writable EEPROM	(120 Bytes)
			247	Vendor Specifics	(8 Bytes)
			255		

Figure 3. EEPROM of a SFP+

Datasheet SPP85P30100D



#09 Ordering information

Part Number	Description
SPP85P30100D	SFP+ Dual Fibre, Tx 850nm (VCSEL), Rx (PIN), maximum distance 300m, power budget 5dB, 10x Gigabit Ethernet, LC connector, 0°C to 70°C, DDM

#10 Document Revision Information

Revision	Description
RevA	Initial release
RevB	Specification updated to include 8x Fiber Channel compatibility

For your product safety, please read the following information carefully before any manipulation of the box:



ESD

This transceiver is specified as ESD threshold 1kV for SFI pins and 2kV for all others electrical input pins, tested per MIL-STD-883G, Method 3015.4 /JESD22-A114-A (HBM). However, normal ESD precautions are still required during the handling of this module.



LASER SAFETY

This is a Class1 Laser Product according to IEC 60825-1:2007. This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated (June 24, 2007).

Skylane Optics® supplies a broad range of optical transceivers. Our engineers work closely with our customers to find the best solutions for every application. We are committed to provide high quality products and services to our customers.

For questions on this product please contact: support@skylaneoptics.com