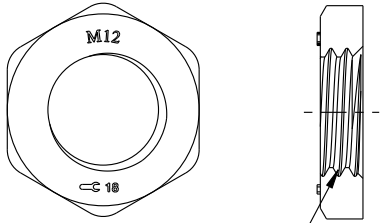

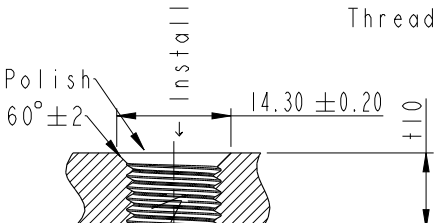
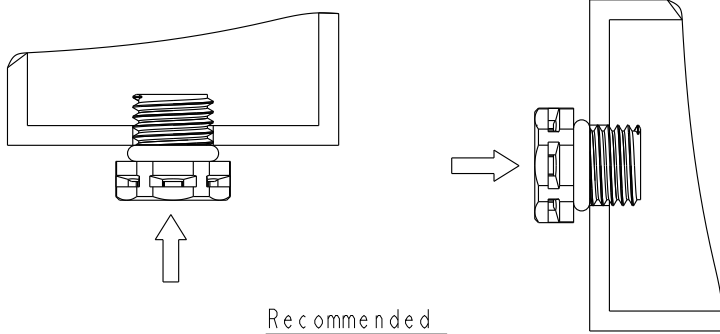



		2		3		4		5		6		7		8	
Cap Membrane Housing O-Ring ALTW DCC. DEPT. CONFIDENTIAL 2017.09.29 ISSUED ALTW CONFIDENTIAL 2017-09-25 R&D DEPT. 16 (HEX.) Ø 17.1 Amphenol LTW 15.8 10.0 M12*1.5				REV.	ECN NO.	DATE	SIGN	DESCRIPTION							
				A	Initial Release	2017/03/28	Jinhai	Chnage Rev.05 To Rev.A							
				B	LEN1750155~166	2017/05/12	Jinhai	Add Recommended thickness of plank							
				C	LEN1790339~350	2017/09/25	Ethan	Add透氣量>3000ml/min@70mbar Vent							
Without Nut 成品料號(Product no.) 透氣量ml/min@70mbar 主體顏色(Body Colour) O-Ring Color 疏油性(Oleophobic) Waterproof Rate VENT-PSINGY-N8001 >1000 Gray Blue N IP68/IP69K VENT-PSINBK-N8001 >1000 Black Blue N IP68/IP69K VENT-PSINGY-O8001 >550 Gray Black Y IP68/IP69K VENT-PSINBK-O8001 >550 Black Black Y IP68/IP69K VENT-PSINGY-O8002 >1000 Gray Green Y IP68/IP69K VENT-PSINBK-O8002 >1000 Black Green Y IP68/IP69K VENT-PSINGY-N8002 >3000 Gray Red N IP68 VENT-PSINBK-N8002 >3000 Black Red N IP68 With Nut 成品料號(Product no.) 透氣量ml/min@70mbar 主體顏色(Body Colour) O-Ring Color 疏油性(Oleophobic) Waterproof Rate VENT-PSIYG-N8001 >1000 Gray Blue N IP68/IP69K VENT-PSIYBK-N8001 >1000 Black Blue N IP68/IP69K VENT-PSIYG-O8001 >550 Gray Black Y IP68/IP69K VENT-PSIYBK-O8001 >550 Black Black Y IP68/IP69K VENT-PSIYG-O8002 >1000 Gray Green Y IP68/IP69K VENT-PSIYBK-O8002 >1000 Black Green Y IP68/IP69K VENT-PSIYG-N8002 >3000 Gray Red N IP68 VENT-PSIYBK-N8002 >3000 Black Red N IP68															
UNIT : mm		TITLE		M12*1.5 VENT		ITEM NO		DRAWN BY		DATE					
TOLERANCE		SCALE		SIZE		DWG NO		CHECKED BY		DATE					
.X ±0.25		2:1		A4		VENT-PSIXXX-XXXXX		Feng-li		2017-09-25					
.XX ±0.1		REV.		WC-REV.		CUSTOMER		APPROVED BY		DATE					
.XXX ±0.05		C		A.6		ALTW		Jerry		2017-09-25					
ANGLES ±1°				☉: Inspection item											
Amphenol LTW 安費諾亮泰企業股份有限公司															
W10814-03-2001A1															

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1		2		3		4		5		6		7		8							
F Screw Nut: Optional part No.: APTP-ABKPA012-001 螺母作為選配件		 M12*1.5				REV.		ECN NO.		DATE		SIGN		DESCRIPTION							
D Through-hole  Recommended Panel Cut-Out 建議開孔尺寸		 Recommended Panel Cut-Out 建議開孔尺寸				 Recommended installation orientation 建議安裝朝向		Note: *  Important Dimension. * Cap: Nylon+GF, 94V-0, UV Resistance * Membrane: ePTFE * Body: Nylon+GF, 94V-0, UV Resistance * O-Ring: Silicone, 94V-0 * Nut Torque Force: 6.0~8.0 Kgf.cm		ITEM NO		DRAWN BY		DATE							
												Ethan		2017-09-25							
										DWG NO		CHECKED BY		DATE							
										VENT-PSIXXX-XXXXX		Feng-li		2017-09-25							
A UNIT:mm  TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		TITLE M12*1.5 VENT		SCALE 2:1		SIZE A4		SHEET 2 OF 2		REV. C		WC-REV. A.6		 Inspection item		CUSTOMER		APPROVED BY		DATE	
																ALTW		Jerry		2017-09-25	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.