


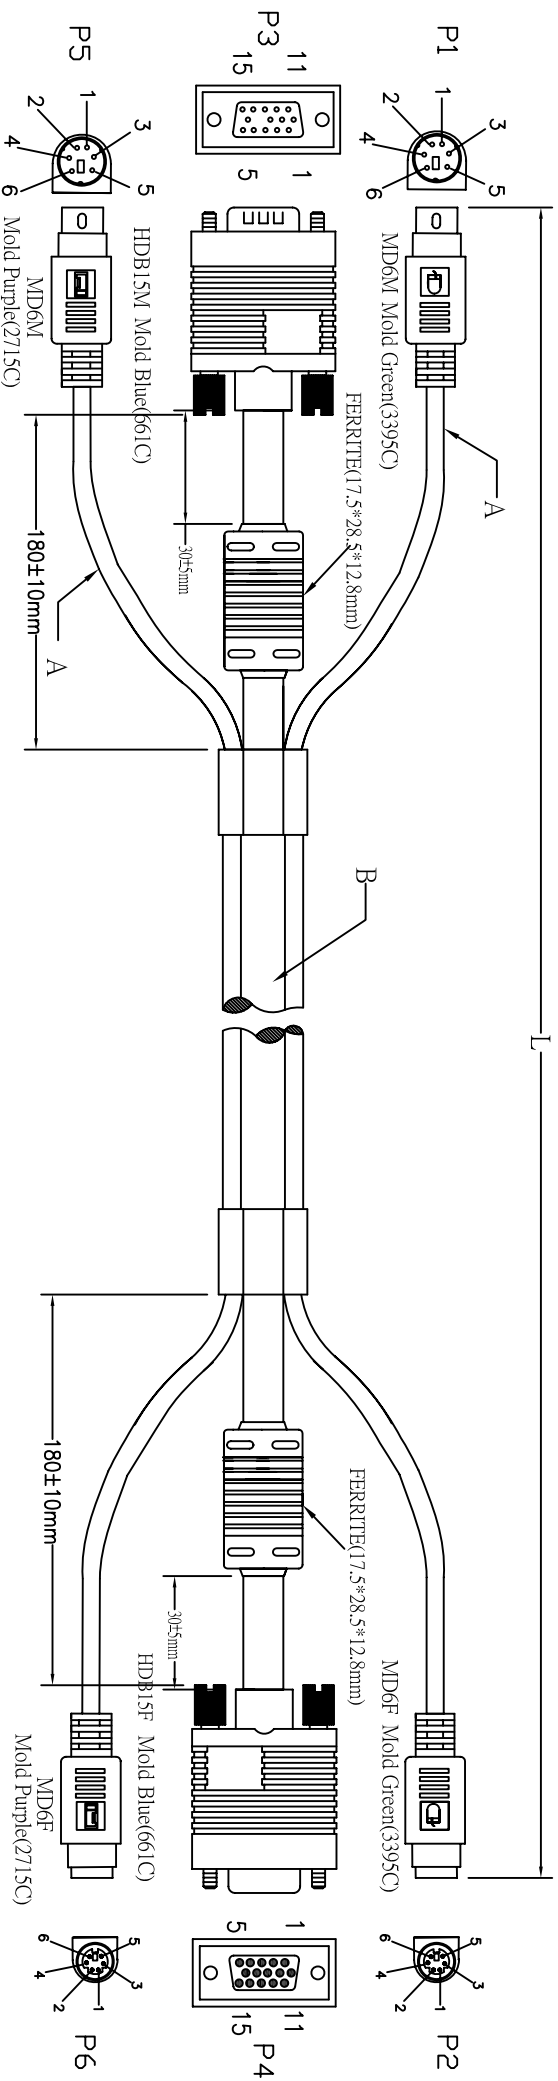


NOTE:

- CABLE:(A)UL2464,28AWG*6C+AL+D,OD=5.0mm,BLACK COLOR,PVC JACKET.
(B)UL2919,28#*3COAX+28#*8C+AL+D+B(85%),OD=9.0mm,BLACK COLOR,PVC JACKET.
- LENGTH:L
- CONNECTOR:HDB15M*1(9Pin Out),HDB15F*1(BLUE Insulator),MD6M*2PCS, MD6F*2PCS.
- MOLDSK-904---HDB15 Molding INNER SHIELD,CONDUCTIVE COPPER FOIL 360° SHIELD
- SCREW:R37.7 SCREW*4PCS.
- CONTACTS:

ITEM NO.	Length	Tolerance	Sticker
AK3155	5000mm	50mm	8716065111583
AK3153	3000mm	30mm	8716065111576
AK3152	2000mm	30mm	8716165111569

MOUSE										
P1	MD6M	1	2	3	4	5	6	64		
P2	MD6F	1	2	3	4	5	6	64		
KEYBOARD										
P5	MD6M	1	2	3	4	5	6	64		
P6	MD6F	1	2	3	4	5	6	64		
P3	HD15M	1	2	3	6	7	8	4	5	10
P4	HD15F	1	2	3	6	7	8	4	5	10

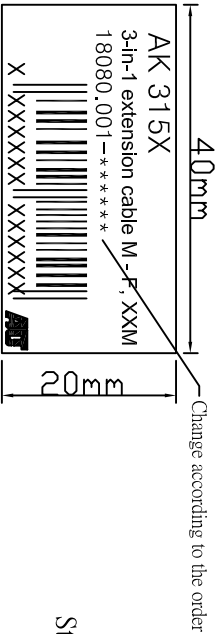

7. OPEN/SHORT TEST: 100% TEST.
INSULATIONS: MIN. 5M.

Company	IBV	Goods Code		Draw	FC001 WJF	Date	2009.13RD.02
ITEM NO.	AK315X	Drawing Evidence		Check		Date	
Goods NO.				Approval		Date	
Original NO.	S-*****	Unit(mm)					
RoHS Compliant							
1PCS/PE BAG(0.06*190*300mm)+Sticker							
				D			
				C	changed 26#&24# to 28#.		10.03.29WJF
				B	changed 28# to 26#&24#.		10.03.15WJF
				VER. A	REVISE		Date

