



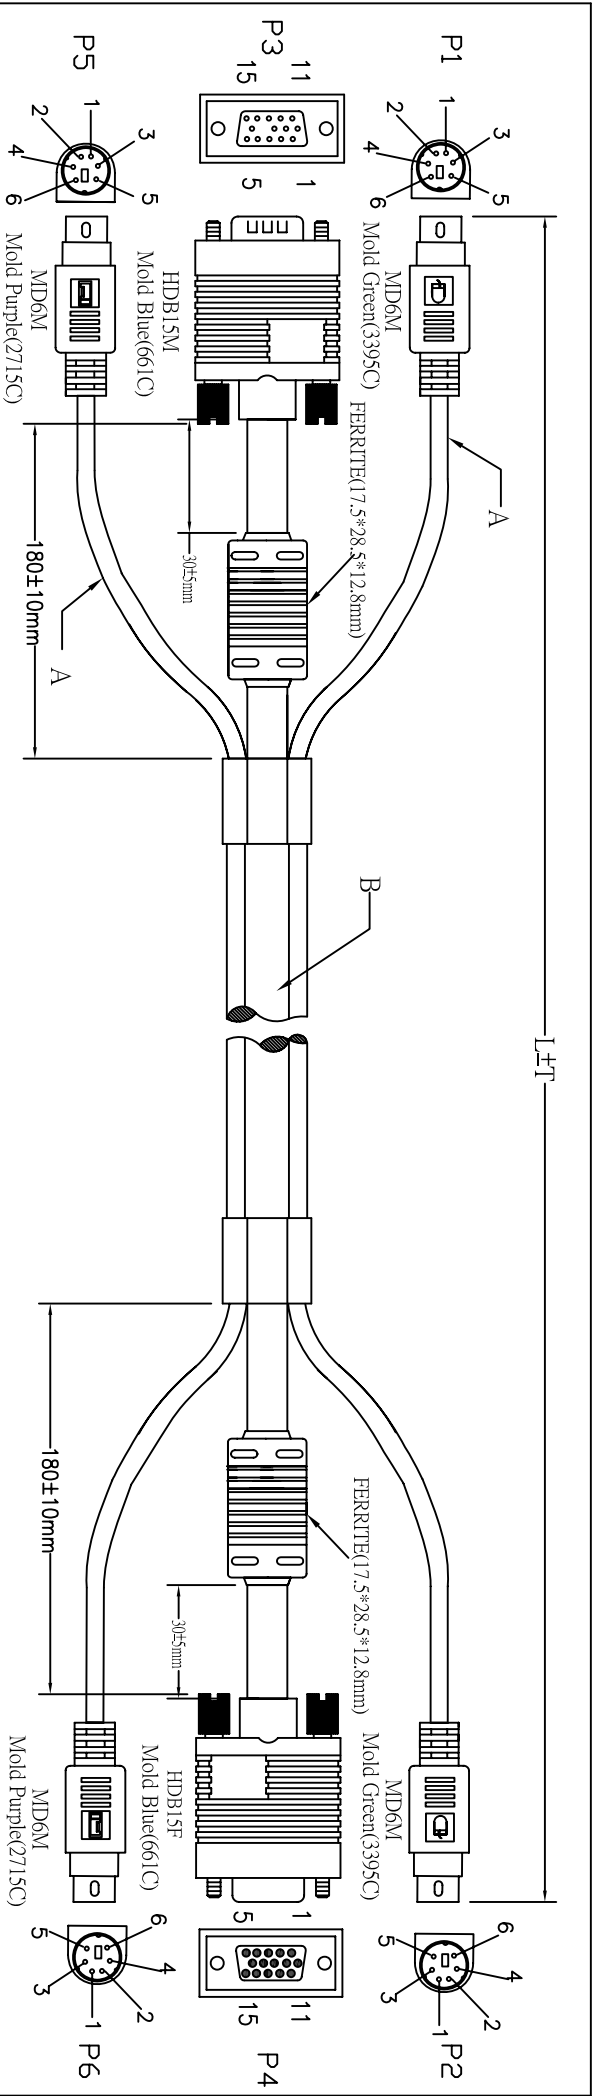

NOTE:

- 1. CABLE: (A) UL2464, 28AWG*6C+AL+D, OD=5.0mm, BLACK COLOR, PVC JACKET.
- (B) UL2919, 28*3COAX+28*8C+AL+D+B, OD=9.0mm, BLACK COLOR, PVC JACKET.
- 2. LENGTH: L
- 3. CONNECTOR: HDB15M*1PCS (9Pin Out), HDB15F*1PCS, (BLUE Insulator), MD6M*4PCS.
- 4. MOLD SK-904---HDB15 Molding INNER SHIELD, CONDUCTIVE COPPER FOIL 360° SHIELD
- 5. SCREW: R37.7 SCREW*4PCS.
- 6. CONTACTS:

		MOUSE																		
P1	MD6M	1	2	3	4	5	6	64												
P2	MD6M	1	2	3	4	5	6	64												
		KEYBOARD																		
P5	MD6M	1	2	3	4	5	6	64												
P6	MD6M	1	2	3	4	5	6	64												
P3	HD15M	1	2	3	6	7	8	4	5	10	13	11	14	12	15	64				
P4	HD15F	1	2	3	6	7	8	4	5	10	13	11	14	12	15	64				
		PC	GC	BC	PD	GD	BD													

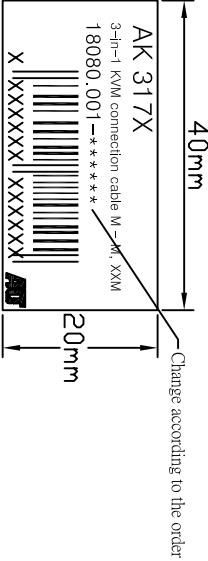

STICKER

7. OPEN/SHORT TEST: 100% TEST.
INSULATIONS: MIN. 5M.

Company	IBV	Goods Code	Draw	FC001 ZXW	Date	2009.10.14
ITEM NO.	AK317X	Drawing Evidence	Check		Date	
Goods NO.			Approval		Date	
Original NO.	S-*****	Unit(mm)				

RoHS Compliant

ITEM NO.	AK3175	Length	5000mm	Tolerance	50mm	Sticker	8716065111644
	AK3173	3000mm	30mm				8716065111637
	AK3172	2000mm	30mm				8716065111620

Sticker

1PCS/PE BAG(0.06*190*300mm)+Sticker

D	
C	changed 26#&24# to 28#.
B	changed 28# to 26#&24#.
VER. A	adding packaging info
REV1SE	
Date	