


80mm

WARNING:
USE ONLY WITH POWER SUPPLY of AT Least:
300W,12V/8A,5V/1A

10mm

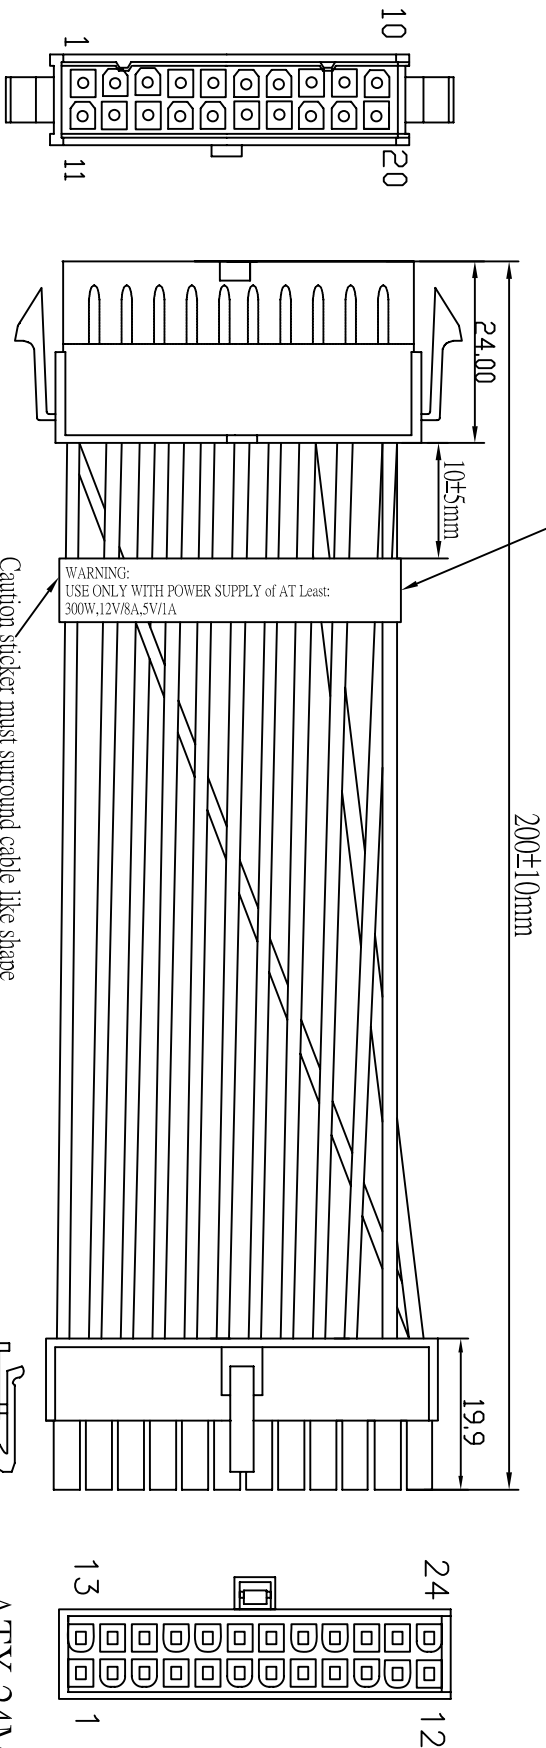

- NOTE:
1. CABLE:UL1007,18AWG*16C,20#*8C,PVC JACKET.
 2. LENGTH:200mm.
 3. CONNECTOR:ATX 20Pin HOUSING (FEMALE)*1PCS,ATX 24Pin HOUSING (MALE) *1PCS.
 4. MOLD:ASSEMBLY.
 5. CONTACTS:


ATX 20F	1	2	3	4	5	6	7	8	9	10	101	11	11	12	13	14	15	16	17	17	18	19	20	20
ATX 24M	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	24	20	21	22	23
	ORG 18#	ORG 18#	BLK 18#	RED 18#	BLK 18#	RED 18#	BLK 18#	GRY 18#	PUR 18#	YEL 20#	YEL 20#	ORG 20#	ORG 20#	BLU 18#	BLK 18#	GRN 18#	BLK 18#	BLK 20#	BLK 20#	BLK 20#	WHT 18#	RED 18#	RED 20#	RED 20#

6. OPEN/SHORT TEST: 100% TEST.

INSULATION:5M.

RoHS Compliant

Company	IBV	Goods Code		Draw	FC001	WJF	Date	2009.10.13		D	
ITEM NO.	AK 3215	Drawing Evidence:		Check			Date			C	Adding Packaging info
Goods NO.				Approval			Date			B	Revised comars,adding caution sticker
Original NO.	S-*****	Unit(mm)					Date			VER. A	REVISE
											Date



ATX