

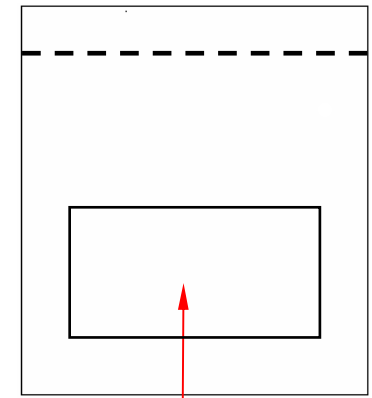


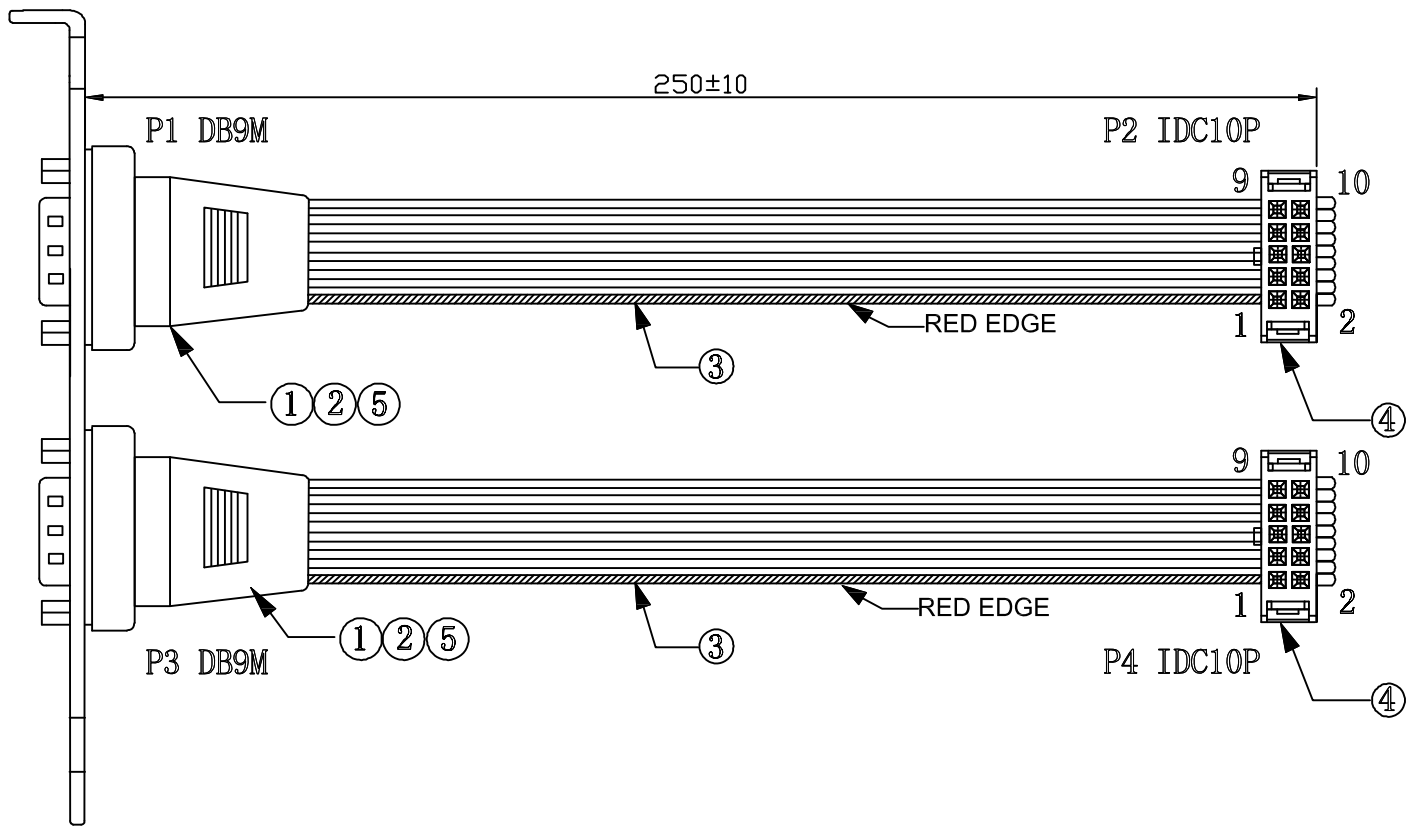

AK3328 0.25M
BRACKET WITH DOUBLE
SERIAL DB 09 CONNECTOR M
15000.001-XXXXXX

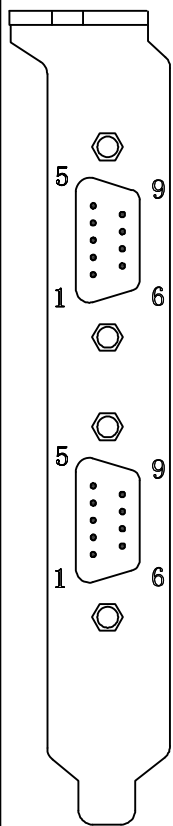

P1	P2	P1	P2	P3	P4	P3	P4
1	1	8	6	1	1	8	6
6	2	4	7	6	2	4	7
2	3	9	8	2	3	9	8
7	4	5	9	7	4	5	9
3	5			3	5		

NOTE:

1. ELECTRICAL TEST:

<1>. 100% OPEN SHORT & MISS WIRE TEST.

<2>. Min. INSULATION RESISTANCE: Min. DC300V 2Mohm.

<3>. Max. CONDUCTOR RESISTANCE: 10ohm.

⑤	SCREW	SCREW SCREW NUTS	Gray	65P PVC	4PCS		
④	PIN OF PLUG	BLACK THREE PIECES WITH NOSE	Black	Iron cross nickel	2PCS		
③	CORD SPECIFICATION	UL2651 28AWG/9C;PH2.54 OD=0.9*11.4.	Gray	65P PVC	2PCS	270MM	
②	TYPE OF PLUG	DKN BLACK DB9 SHELL	Black	ABS	1SET		
①	PIN OF PLUG	DB9P M Terminal	Blue	Iron cross nickel	2PCS		
ITEM	NAME	SPECIFICATION	COLOUR	MATERIAL	QTY	SIZE	REMARK



Tolerance unless otherwise specified	Linear	0.00±	Model name: DB9P M to IDC 2.54 10P cable.			
	Angles	± °	Customer No.: AK3328			
Size :A4	Unit:mm	Rev:A	Approved By		Date	
Scale:1:1					2013-09-16	