



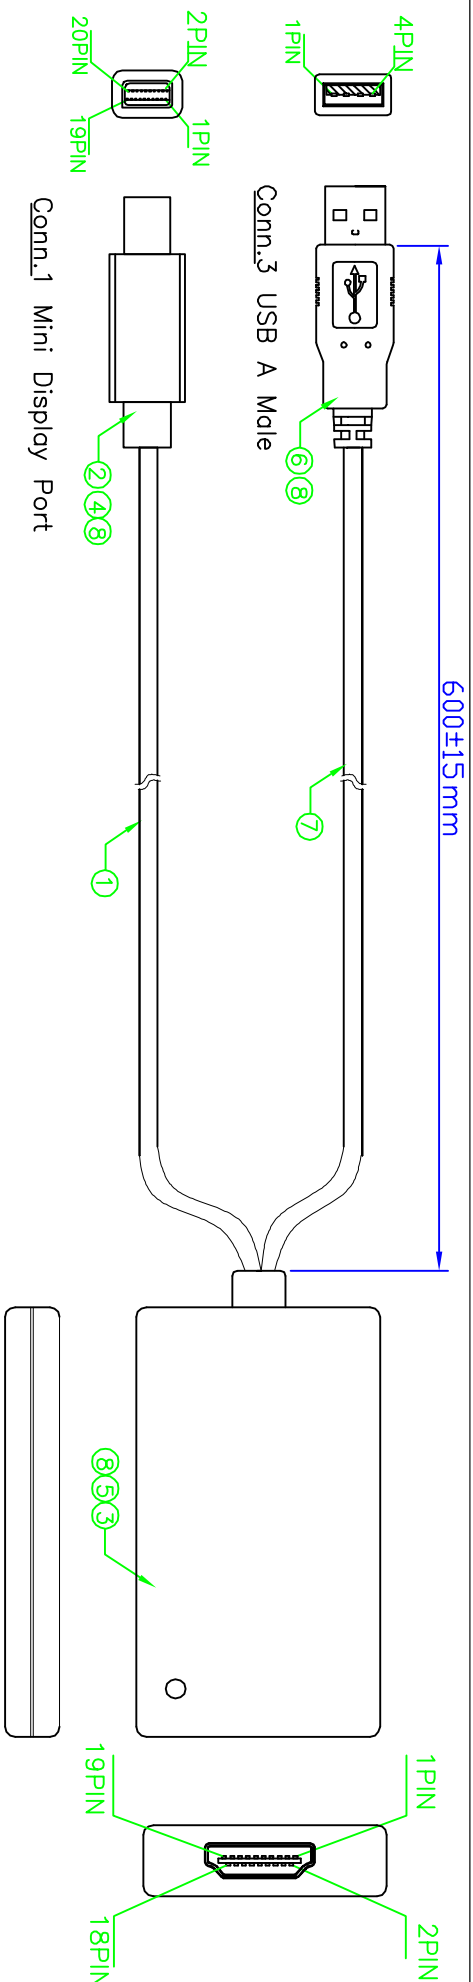

Features

- Supports Mini DisplayPort 1.1a input, USB 2.0 input and HDMI1.3b output.
- Works by integrating mini DisplayPort video source and USB audio source of the MacBook into HDMI output
- Getting the HDMI audio format through special USB Audio Decoding Chip.
- Powered from Mini DisplayPort and USB Port.
- Supports HDMI 225MHz/2.25Gbps per channel (6.75 Gbps all channel) bandwidth.
- Supports HDMI resolution of up to 1080P
- Supports HDMI 12 bit per channel (36 bit all channel) deep color.
- Supports uncompressed 2 channel audio such as LPCM.

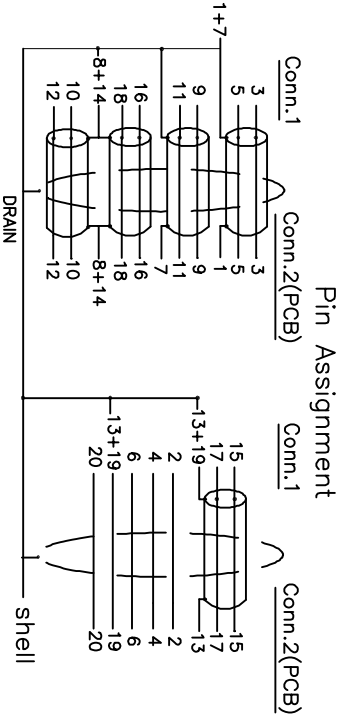

⑧	S.R. Molding 45P PVC, colocr: White	20	9
⑦	UL2725 USB2.0 Cable 30AWG(7/0.10TC)*2C+AL/MY+D.W+BD OD:3.5mm Colocr:White	0.61	m
⑥	USB A Male, Black Insulation,Pin Gold Plated 3u", Shell Gold Planted	1	set
⑤	Plastic Hood for HDMI Female, Material: ABS, Colocr: White	1	set
④	Plastic Hood For Mini DP, Material: ABS, Colocr: White	1	set
③	Mini DP+USB+Toslink to HDMI Converter With HDMI Female, PCB+SMT HDMI Pin Gold Flash 3u", Shell Gold Planted	1	set
②	Mini Display Port Male, Insulation: White, Material: LCP, Pin Gold Plated 3u", Shell Gold Plated	1	set
①	Display Port Cable UL20276 [32AWG(7/0.08TC)*1P+D.W+AL+My(ar)*5+32AWG(7/0.08TC)*5C+AL/MY+D.W+BD+Jacket PVC Color: White OD:4.8±0.2mm	0.61	m
NO.	DESCRIPTION	Q'TY	UNIT

REV.		DESCRIPTION				DATE		
	TOLERANCE			AG				
	INCHES		M/M					
.X	.015	.30	TITLE: Mini DP+USB to HDMI F Adapter With Audio				DRAWING NO.:	
.XX	.010	.10						
.XXX	.005	.05						
DRAWN BY	Henry		CUSTOMER :		AK4003			REV. A
CHECK BY			SCALE		NONE			
APPD BY			UNIT		MM			
				DATE		09.12.24		1/1