


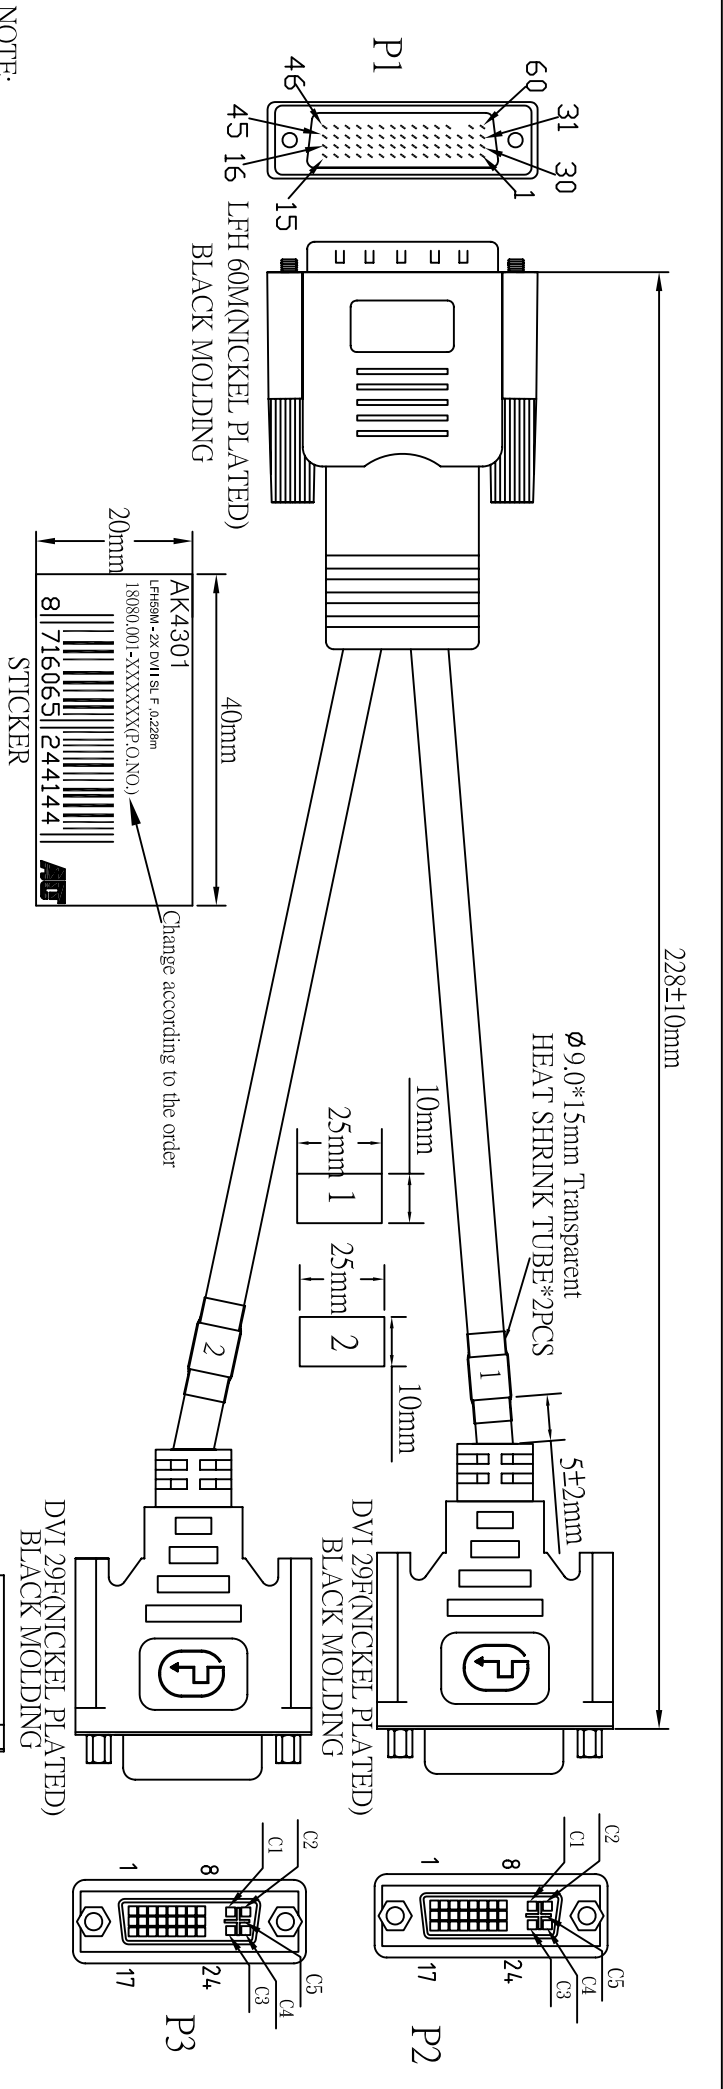

- NOTE:
1. CABLE:UL20276,30#*3COAX+(28#*1P+AE)*4PCS+28#*(1P+6C)+AEB,OD=8.5mm,BLACK COLOR,PVC JACKET.(AM BRAID)
 2. LENGTH:228mm
 3. CONNECTOR:LFH 60M*1PCS(BLACK INSULATOR,OUT 58PIN),
DVI 29F*2PCS(WHITE INSULATOR,Pre-ri-vet nut).(NICKEL PLATED)
 4. MOLD:BLACK MOLDING
 5. SCREW:QC 24 SCREW*2PCS.
 6. CONTACTS:

P2/DVI 29F	1	2	3	9	10	11	17	18	19	23	24	22	14	15	8	6	7	16	C4	C1	C2	C3	C5	64					
P1/LFH 60M	<u>26 25 35</u> GND			<u>28 27 34</u> GND			<u>30 29 33</u> GND			<u>31 32 57</u> GND			<u>5 54</u> TP			<u>55 6</u> 28AWG			7	36	56	2	58	3	1+4+59	64			
	TP			TP			TP			TP			TP																BRAID
P3/DVI 29F	1	2	3	9	10	11	17	18	19	23	24	22	15	14	8	16	6	7	C4	C1	C2	C3	C5	64					
P1/LFH 60M	<u>21 20 41</u> GND			<u>19 18 42</u> GND			<u>17 16 43</u> GND			<u>45 44 49</u> GND			<u>52 11</u> TP			<u>51 40 10 9</u> 28AWG			50	14	47	13	12+15+46	64					
	TP			TP			TP			TP			TP																BRAID