



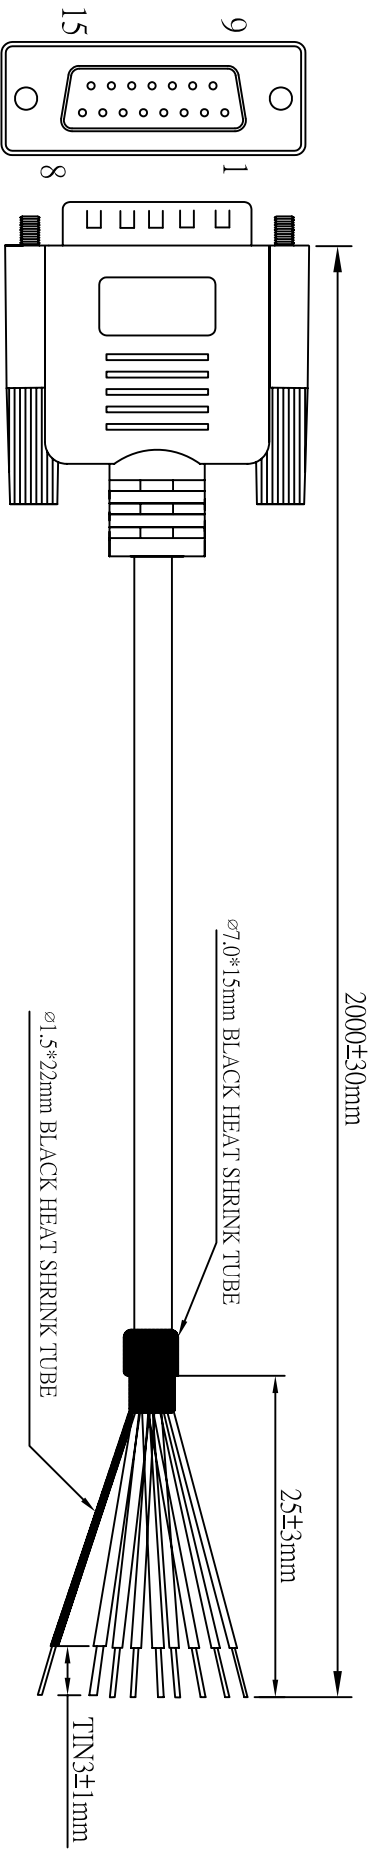

DB 15M(NICKEL PLATED)
BEIGE MOLDING

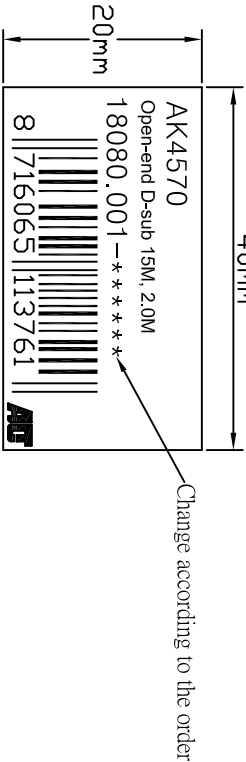


NOTE:

1. CABLE:28AWG, NON-UL, AL-FOIL, 15C+1, OD=6.0mm, BEIGE COLOR, PVC JACKET.
2. LENGTH: 2000mm
3. CONNECTORS: DB15M*1PCS (BLACK INSULATOR, NICKEL PLATED)
4. MOLD: BEIGE MOLDING.
5. SCREW: QC24(#4-40) SCREW*2PCS.
6. CONTACTS:


DB15M	1	2	3	4	5	6	7	8	9	10
OPEN	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	BLK
DB15M	11	12	13	14	15	64				
OPEN	PINK	LIGHT	BLACK	BROWN	RED	DRAIN				
	/GREEN	/WHITE	/WHITE	/WHITE	/WHITE					

7. OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

RoHS COMPLIANT

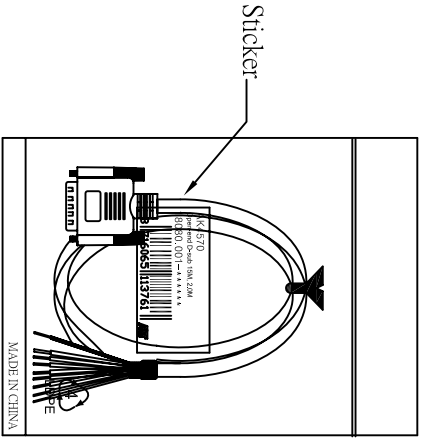

Company	I.B.V	Goods Code		Draw	FC001 LTX	Date	2009.10.14		
ITEM NO.	AK 4570	Drawing Evidence:		Check		Date			
Goods NO.				Approval		Date			
Original NO.	S-*****	Unit(mm)				Date			



D			
C			
B	CHANGED THE WIRE COLOR, OR A TO GR A18	10.26h.04HOS	
VER. A	REVISE	Date	

1PCS/PE BAG(0.06*100*200mm)+Sticker