


ALL MATERIAL ARE ROHS AND CALIFORNIA PROP.65 COMPLIANT

CUSTOMER'S APPROVAL: _____ DATE: _____
FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☐ NO.

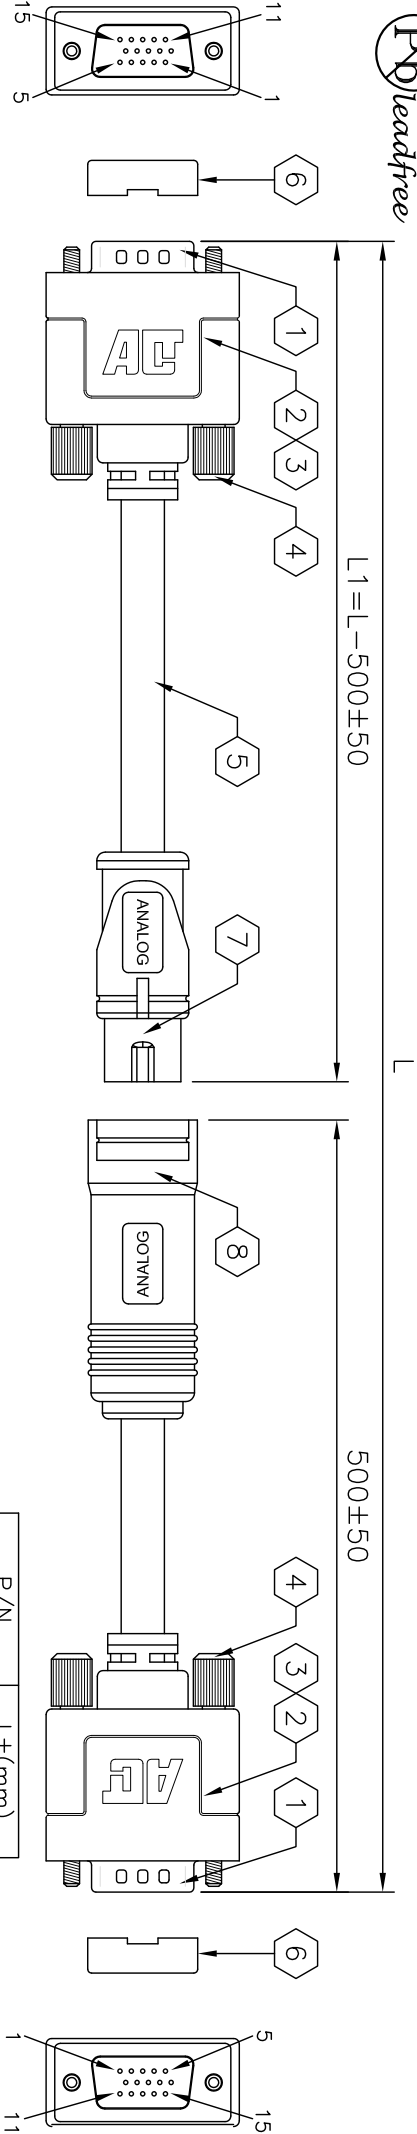


WIRE MARKING:

AWM **RU** AWM 20276 80°C 30V VW-1
ACT Ultra High Performance cable IIC-code


NOTE:

1. WIRE MARKING WITH ACT LOGO PRINTING
2. PE BAG WITH BARCODE LABEL
3. SMOOTH JACKET

PINOUT CONFIGURATION

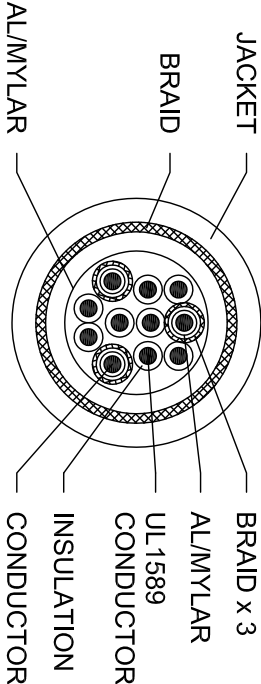

P/N	L±(mm)
AK4902	5000±100
AK4903	7000±150
AK4904	10000±200
AK4905	15000±200
AK4906	20000±200
AK4907	25000±200
AK4908	30000±200

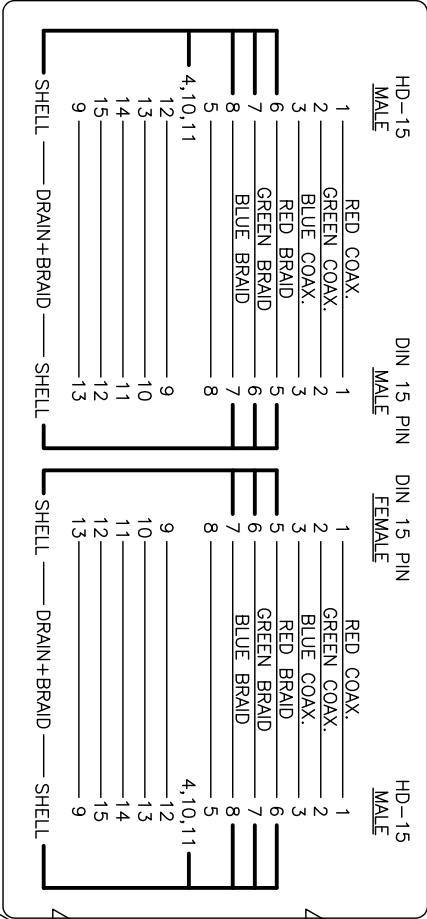

ITEM	DESCRIPTION	QTY.	UNIT
1	HD15 MALE CONNECTOR W/NICKEL PLATED PINS & SHELL	2	PCS.
2	PAT. NO.:US 6,287,148 B1 RF-BLOCK™ SHIELDING METAL CAN	2	PCS.
3	BLACK MOLDED PVC HOOD W/ACT LOGO		
4	BLACK #4/40 THUMBSCREW	4	PCS.
5	UL20276 (28AWG COAX+AL/MYLAR+65% BRAID)x3C	SEE	DWG.
	+(28AWG WIRE)x6C+AL/MYLAR+85% BRAID OVERALL;		
	BLACK PVC "SMOOTH" JACKET		
6	TRANSPARENT PROTECTION CAP	2	PCS.
7	DIN 15P MALE CONNECTOR W/NICKEL PLATED PINS & SHELL	1	PCS.
8	W/BLACK MOLDED PVC HOOD		
	DIN 15P FEMALE CONNECTOR W/NICKEL PLATED PINS &	1	PCS.
	SHELL W/BLACK MOLDED PVC HOOD		

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY
A	CHANGE NICKEL PLATED	AUG.05.10	STANLEY

Part Number:

SEE TABLE

Revision:

A

RFQ number:

Drawing#: 99030101

Drawn by:

Scale: None

Checked by:

Date: 03/01/2010

SALES: LILIAN

