


1830±30. mm

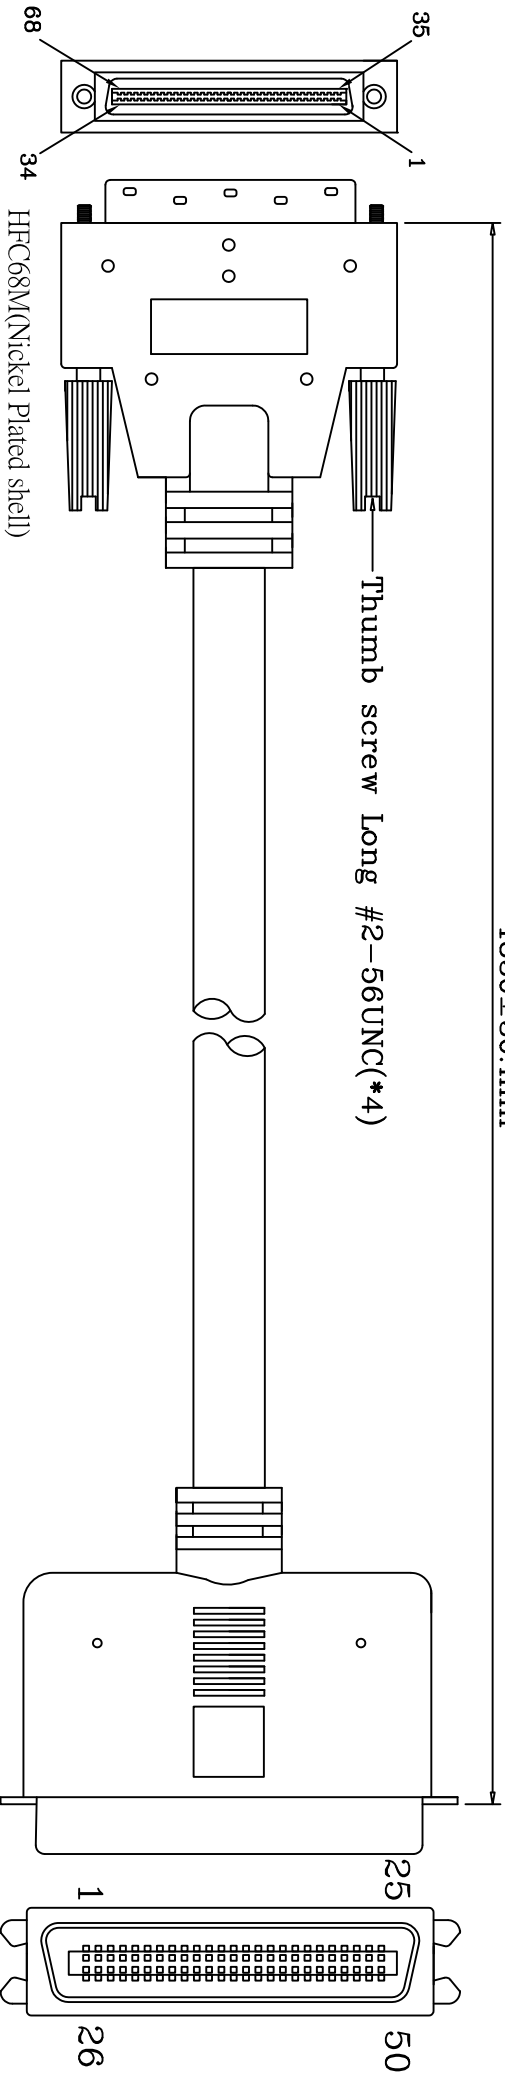

NOTE:

1. CABLE: UL2919,28AWG*2PAIRS/30AWG*23PAIRS,BLACK,OD=9.0mm,PVC JACKET (AM)
2. LENGTH: 1830mm
3. CONNECTOR: HFC68M*1PCS,CN50M*1PCS
4. SCREW: M2.0*4PCS(#-56UNC)50P
5. MOLD: METAL ASSEMBLY,MOLDING
6. CONTACTS:

HFC68P	6	40	7	41	8	42	9	43	10	44	11	45	12	46	13	47	14	48
CN50P	1	26	2	27	3	28	4	29	5	30	6	31	7	32	8	33	9	34
HFC68P	15	49	16	50	NC	NC	18	52	19	53	20	54	21	55	22	56	23	57
CN50P	10	35	11	36	12	37	13	38	14	39	15	40	16	41	17	42	18	43
HFC68P	24	58	25	59	26	60	27	61	28	62	29	63	30	64	SHELL			
CN50P	19	44	20	45	21	46	22	47	23	48	24	49	25	50	SHELL			

7. OPEN/SHORT TEST:100% TEST.
INSUALTION:2M.

RoHS Compliant

Company	IBV		Goods Code					
ITEM NO.	AK5663		Drawing Evidence:					
Goods NO.			Draw	FC001 XUBIN	Date			
Original NO.	S-*****	Unit(mm)	Check		Date			
			Approval		Date			
ATE								
						D		
						C		
						B	Adding packaging info	2011.01.13
						VER. A	REVISE	Date

