


1800±30mm

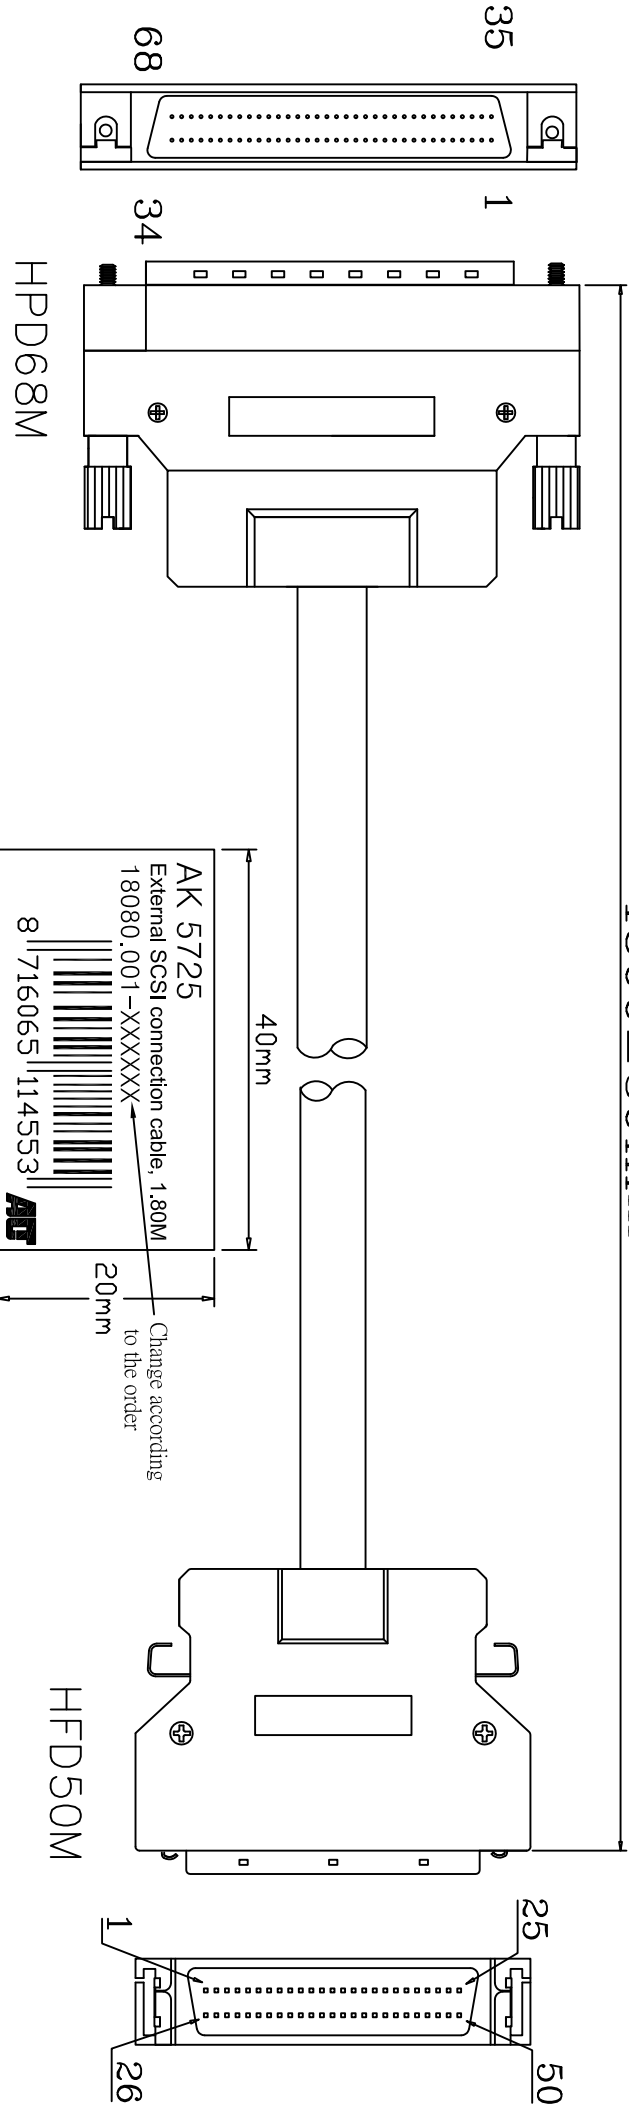

NOTE:

1. CABLE: UL2919 28# 25PAIRS+1+AL/MY+BRAID, OD=9.0mm, BEIGE, PVC JACKET
2. LENGTH: 1800mm.

3. CONNECTOR: HPD68M*1PCS.(NICKEL PLATED,PIN GOLD PLATED ASSEMBLY SHELL)

HFD50M*1PCS.Assembly of iron shell shrapnel

4. MOLD: ASSEMBLY
5. SCREW: #2.56UNC*2PCS.

6. CONTACTS:


HPD68P	6	40	7	41	8	42		16	50	NC	52	19	53	20	54	NC	NC
HFD50P	1	26	2	27	3	28		11	36	13	38	14	39	15	40	12	37
	TP		TP		TP			TP		TP		TP		TP		TP	

21	55		29	63	30	64	SHELL
16	41		24	49	25	50	SHELL
TP			TP		TP		

7. OPEN/SHORT TEST: 100% TEST.
INSUALTION: 2M.

RoHS Compliant

Company	IBV	Goods Code	Draw	ZXW	Date	2009.10.23	D	
ITEM NO.	AK5725	Drawing Evidence:	Check		Date		C	CHANGE CONTACTS
Goods NO.			Approval		Date		B	Adding packaging info
Original NO.	S-*****	Unit(mm)			Date		VER. A	REVISE
								Date

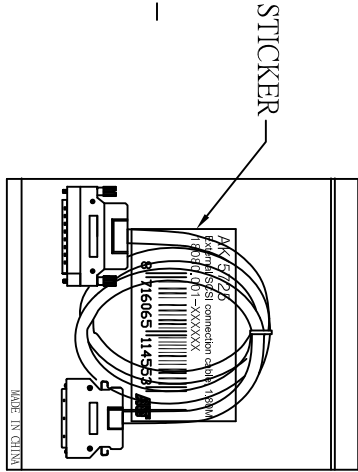

1PCS/PE BAG(0.06*190*300mm)+STICKER

