


Product- information Type: PR134/37,5/SE/M3

Group: Special heatsinks, Finger shaped heatsinks

Special heatsinks

Application (Cases):	TO220 TO126(SOT32)
Number of semiconductors:	1
Mounting of semiconductors :	to screw
Recommended accessories:	LS730 LS750
Finish:	black anodized
Thermal resistance:	5.7 K/W
Material:	Aluminium

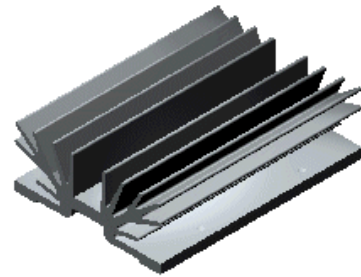

Extruded heatsink especially for semiconductor in case TO220; TO126(SOT32).

Standard types, ready to be fitted:

PR 134/37,5/SE/M3 = with 1 x M3 thread (for 1 semiconductor)

PR 134/75/SE/M3 = with 2 x M3 threads (for 2 semiconductors)

Covered and space saving mounting e.g. on Eurocard-PCB's.

Mounting of heatsink with M3 screws, also solderable with LS 730; LS 750.

Other standard lengths for PR 134 = 37,5, 50, 75 and 100 mm.

Also available in meter lengths.

Other lengths and machining on request.

