


## Product- information Type: PR133/94/SE/M3

Group: Special heatsinks, Finger shaped heatsinks

Special heatsinks

Application (Cases):	TO220 TO218(TOP3)
Number of semiconductors:	3
Mounting of semiconductors :	to screw
Recommended accessories: LS730 LS750 SI5018 SI5023	
Finish:	black anodized
Thermal resistance:	3.6 K/W
Material:	Aluminium

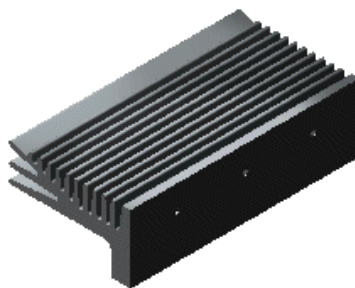

Extruded heatsink especially for semiconductor in case TO220; TO218(TOP3).

Standard type, ready to be fitted:

PR 133/94/M3 = with 3 x M3 thread (for 3 semiconductors)

Space saving mounting e.g. on Eurocard-PCB's.

Mounting of heatsink with M3 screws, also solderable with LS 730; LS 750.

Other standard lengths for PR 132 = 37,5, 50, 75 and 100 mm.

Also available in meter lengths.

Other lengths and machining on request.

