

The Atlona AT-UHD-CLSO-601 is an advanced six-input, multi-format switcher with built-in 4K scaling and mirrored HDBaseT™ and HDMI outputs. It simplifies classroom and small office system integration by providing four HDMI and two multi-function analog inputs, to enable the use of both new and legacy sources with HDMI displays. Professional audio features such as a microphone input with 48 volt phantom power and ducking are also included, allowing the switcher to address a wide array of AV switching and processing needs often encountered in classrooms, conference rooms, boardrooms, training rooms and other presentation settings.

The AT-UHD-CLSO-601 joins the CLSO product line and offers a simpler set of inputs for applications when all sources are near the switcher. The new switcher is designed to work with the Atlona AT-UHD-EX-100CE-RX extender receiver and offers HDBaseT signal extension up to 328 feet (100 meters) with Ethernet and PoE for remote powering the receiver.

Four HDMI inputs -

- Digital inputs to support up to four DVI, HDMI and DisplayPort Sources
- Works with PCs, Blu-ray players, document cameras, teleconference systems, wireless solutions with industry standard digital audio/video outputs

Two multi-function analog inputs on 15-pin HD connectors -

- Accepts RGBHV, component, S-video, or composite signals using common adaptors and break out cables
- Provides input options for legacy analog sources

Mirrored, dual outputs on HDBaseT and HDMI -

- Supports dual display applications with both local and extended distance displays up to 328 feet (100 meters)
- Eliminates cost associated with extra extension components; simplifies installation. HDMI output allows additional HDBaseT transmitter for dual long distance applications

4K/UHD @ 30Hz capability -

- Compatible with Ultra High Definition sources and displays
- Supports high resolution applications such as CAD, desktop publishing, and detailed financial reporting

Built-in 4K scaler -

- Scales to and from most resolutions up to 4K to optimize content from any source to any monitor or projector up to 4K
- Eliminates the need for external scaling components

AV, Ethernet, and control over HDBaseT -

- Delivers 4K/UHD video, audio, 100BaseT Ethernet, and control through a single cable
- Eliminates multiple cable runs between source, control system router and display

Power over Ethernet for remote-powered HDBaseT receiver -

- Industry standard IEEE 802.3af PoE supplied by the switcher over HDBaseT
- No local AC outlet required saves time and integration costs

Auto-switching -

- Selects last connected HDMI or VGA source
- Reduces complexity or eliminates control system completely

Specifications

Video Resolutions

Video

4096x2160@24/25/30Hz, 3840x2160@24/25/30Hz (UHD), 2048x1080p, 1080p@23.98/24/25/29.97/30/50/59.94/60Hz, 1080i@50/59.94/60Hz, 720p@50/59.94/60Hz, 576p, 576i, 480p, 480i

VESA

2560x2048, 2560x1600, 2048x1536, 1920x1200, 1680x1050, 1600x1200, 1600x900, 1440x900, 1400x1050, 1366x768, 1360x768, 1280x1024, 1280x800, 1280x768, 1152x864, 1024x768, 800x600, 640x480

Colorspace

YUV, RGB

Chroma Subsampling

4:4:4, 4:2:2, 4:2:0

Color depth

8-bit, 10-bit, 12-bit

Audio

Analog Output

PCM 2Ch (de-embedded)

HDMI/HDBaseT Output

PCM 2Ch, supports DTS and Dolby pass through

Sample Rate

32kHz, 44.1kHz, 48kHz, 88.2kHz, 96kHz, 176.4kHz, 192kHz

Bit rate

up to 24-bit

Distance

CAT5e/6 @ 4K

up to 70M

up to 230 ft

CAT5e/6 @ 1080p

up to 100M

up to 328 ft

CAT6a/7 @ 4K

up to 100M

up to 328 ft

HDMI @ 4K

up to 5 meters

up to 15 feet

HDMI IN/OUT @ 1080p

up to 10 meters

up to 30 feet

Signal

Bandwidth

10.2 Gbps

HDCP

Switchable - Complaint / Non compliant

Temperature

Operating

0°C to 50°C

32°F to 122°F

Storage

-20°C to 60°C

-4°F to 140°F

Humidity

20 to 90% non-condensing

Power

Consumption

33W

Idle Consumption

3.1W

Supply

Input: AC 100~240V 50/60Hz

Output: DC 48V 3.125A

Dimension

H x W x D

44 x 433.8 x 255 (mm)

1.73 x 17.08 x 10.04 (inch)

w/feet

55.15 x 433.8 x 255 (mm)

2.17 x 17.08 x 10.04 (inch)

Rack Unit

1U

Weight

Device

3.12 kg

6.9 lbs


Certification

Power Supply

CE, FCC, cULus, RoHS, CCC, RCM

Product

CE, FCC

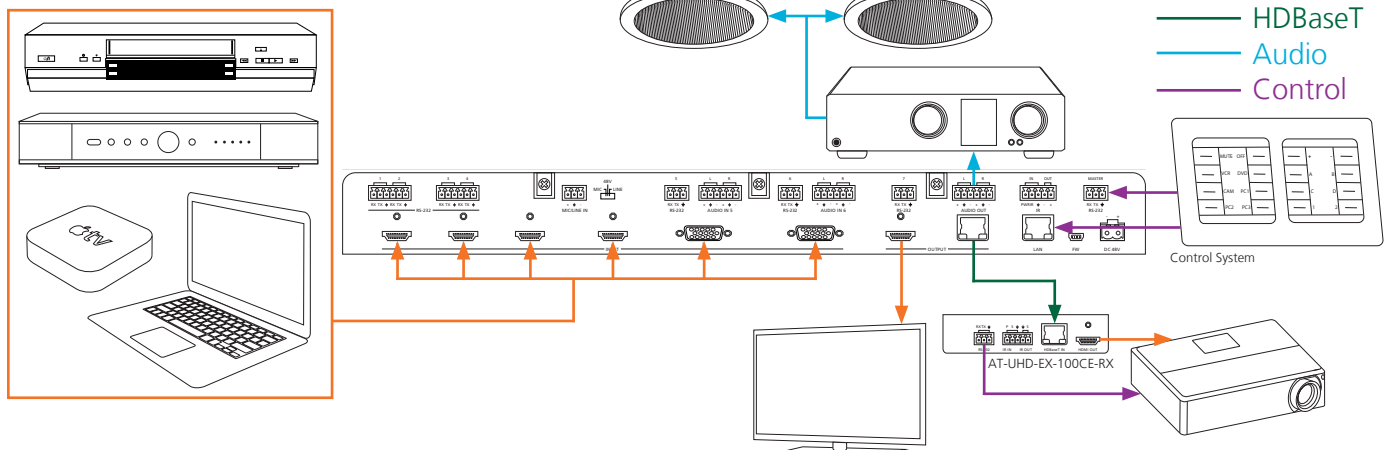

Specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here. Not responsible for typographical errors.