


© MPE-GARRY


Horizontal pinheader with 0,50 mm square pins and 2,00 mm pitch. Many different pin length and plating options. Standard and low profile versions available.

Single row

Pitch (mm)	2,00
Mating contact size	? 0,50
No of contacts	10
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,5 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	7,00
B (Mating)	4,00
C (PCB side)	2,50
W	3,00

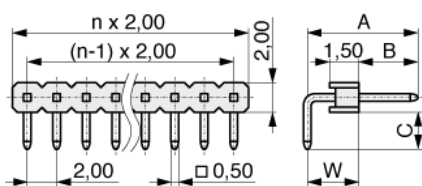

Footprint:



Date: 18.04.2011

Order code: 332-1-010-0-F-XS0-0700



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=332-1-010-0-F-XS0-0700