


## TYPE B

### Female connector – straight and angled – 32 and 64 positions

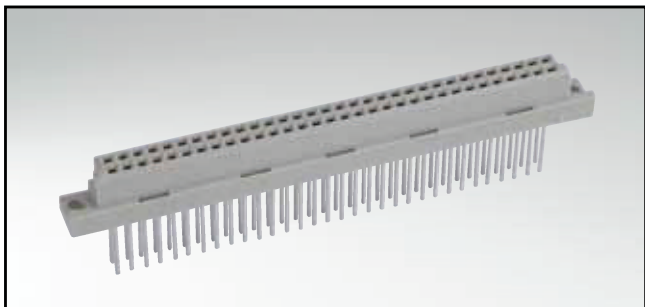



RoHS compliant

#### DESCRIPTION




- Solder pin, solder lug and wire wrap
- Quality class 3 (also available in quality class 2 or 1)
- Special assembly on request

#### PRODUCT DRAWING


PCB-hole pattern

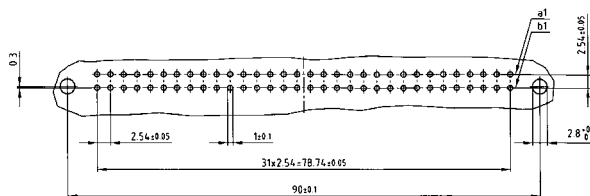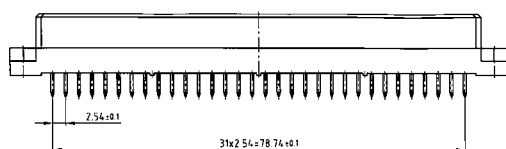


Panel cutout

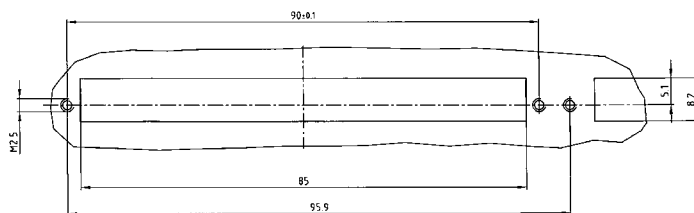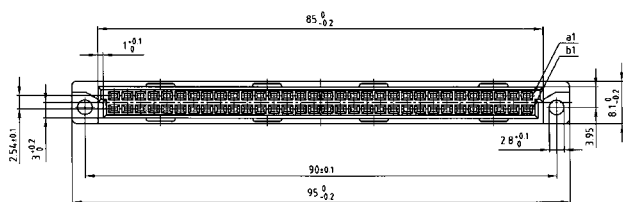


Solder pin straight 2.5 mm




Solder pin straight 4 mm




Solder lug



Solder pin angled



Solder pin straight 2.5 mm with clip



#### ORDER DATA

(Dim. = mm)

| No. of Pos. | Row | • = contact, + = no contact |   |   |   |   | Wire Wrap | Solder pin straight 2.5 mm | Solder pin straight 4 mm | Solder lug    | Solder pin angled | Solder pin straight 2.5 mm with clip |
|-------------|-----|-----------------------------|---|---|---|---|-----------|----------------------------|--------------------------|---------------|-------------------|--------------------------------------|
|             |     | Pos.                        | 1 | 2 | 3 | 4 | 5         |                            |                          |               |                   |                                      |
| 32          | a   |                             | • | • | • | • | •         | 122 A 10019 X              | 122 A 10049 X            | 122 A 10079 X | 122 A 10109 X     | 122 A 10139 X                        |
|             | b   |                             | + | + | + | + | +         |                            |                          |               |                   | 122 A 13189 X                        |
| 32          | a   |                             | + | • | + | • | +         | 122 A 10029 X              | 122 A 10059 X            | 122 A 10089 X | 122 A 10119 X     | 122 A 10149 X                        |
|             | b   |                             | + | • | + | • | +         |                            |                          |               |                   | 122 A 13199 X                        |
| 64          | a   |                             | • | • | • | • | •         | 122 A 10039 X              | 122 A 10069 X            | 122 A 10099 X | 122 A 10129 X     | 122 A 10159 X                        |
|             | b   |                             | • | • | • | • | •         |                            |                          |               |                   | 122 A 13209 X                        |

Clip for hole diameter 2.8 ± 0.1 mm, PCB thickness = 1.6 mm