


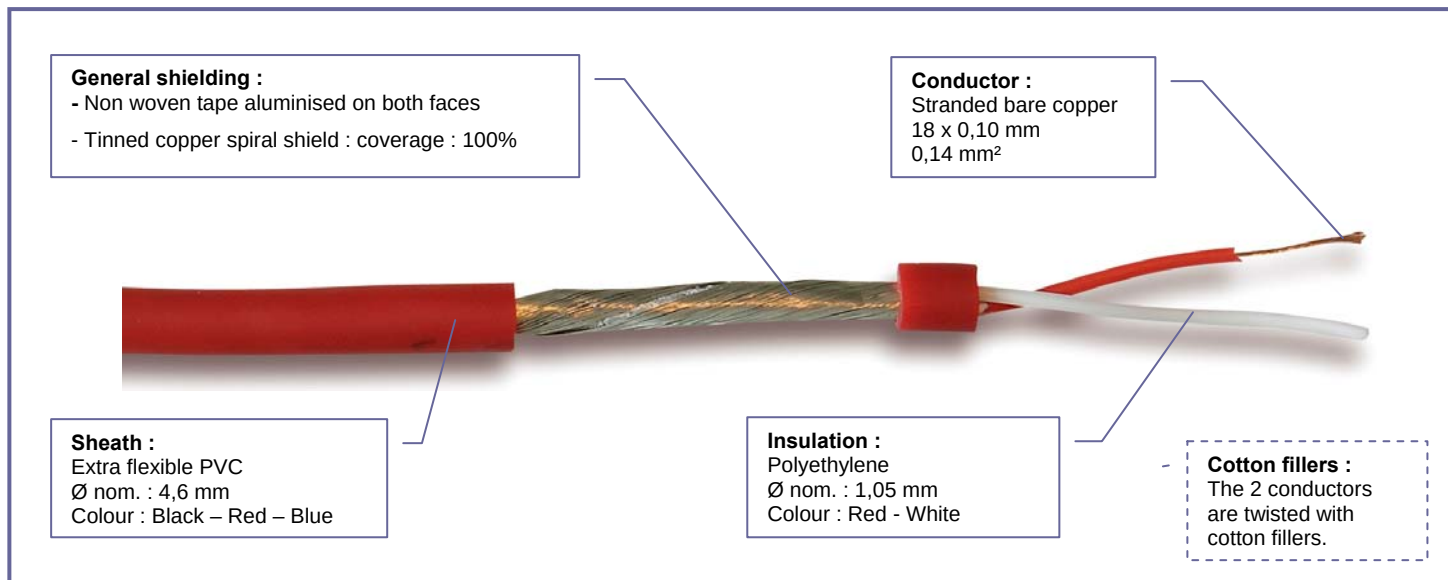

PRODUCT INFORMATION

Application

Analogue balanced audio links.
For fixed and mobile applications
For inside wiring of racks and audio equipment.

Electrical properties

Voltage : **50/75 V AC/DC**

Test voltage (50 Hz – 1 min) : **1500 V**

Electrical resistance at 20°C :

- Conductor : **134 Ω/km**
- shield : **34 Ω/km**

Insulation resistance at 20°C : **1000 MΩ.km**

Capacitance at 1 kHz :

- conductor/conductor : **65 pF/m**
- conductor/shield : **120 pF/m**

Characteristics

 Temperature range :
- 30°C → + 70°C

 Weight :
27 kg/km

 Conform to RoHS directive