


PC104 STACK-THROUGH VERSION


Female connector – straight – press fit contact – contact length 12.2 mm

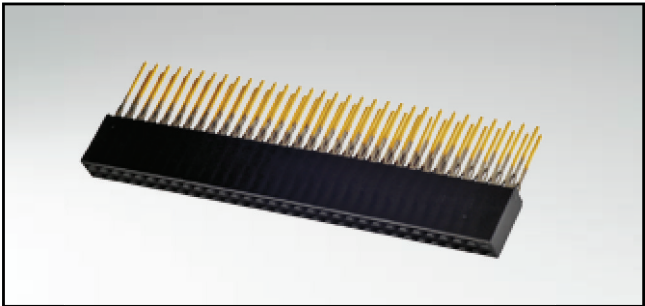


RoHS compliant

- DESCRIPTION**
- Standard version for PC104 module height 15.0 mm
 - Flexible press fit design
 - Double beam contacts
 - 40 / 64 / 100 positions version (further versions on request)
 - Quality class 3 and alternative quality class 2 available on request
 - Delivered as a set with "spacer"


PRODUCT DRAWING

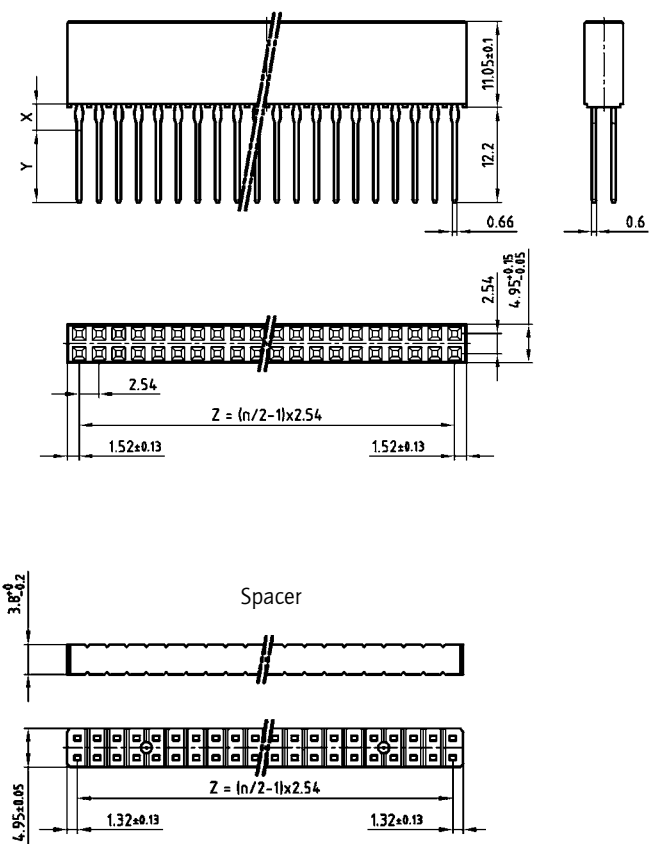

PCB-hole pattern

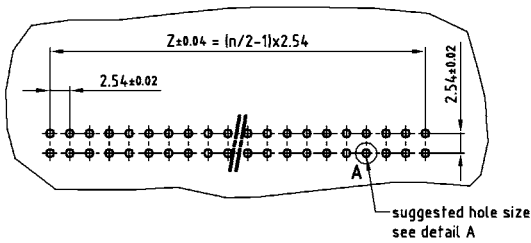

Quality Class	Plating		
	Underplate min. 1.3 µm Ni		
	Mating Area	Post Area "X"	Post Area "Y"
3	0.25 µm Au	1.3 µm Sn 100 matt	0.10 µm Au
2	0.40 µm Au	1.3 µm Sn 100 matt	0.25 µm Au



ORDER DATA

(Dim. = mm)

Number of positions	Quality class 3	Quality class 2
40	49-000023	49-000022
64	49-000103	49-000102
100	49-000143	49-000142