


PC104 Non-Stack-Through Version

Female connector – straight – press fit contact – contact length 3.4 mm

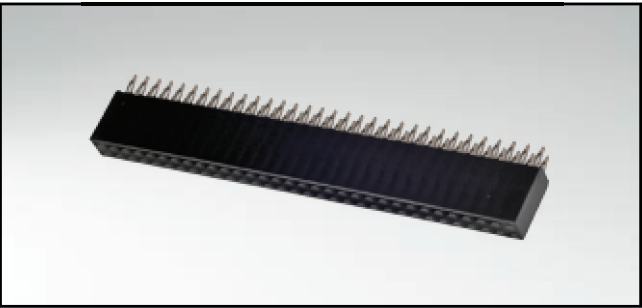


RoHS compliant


DESCRIPTION

- Flexible press fit design
- Double beam contacts
- 40 / 64 / 100 positions version (further versions on request)
- Quality class 3 and alternative quality class 2 available on request


PRODUCT DRAWING

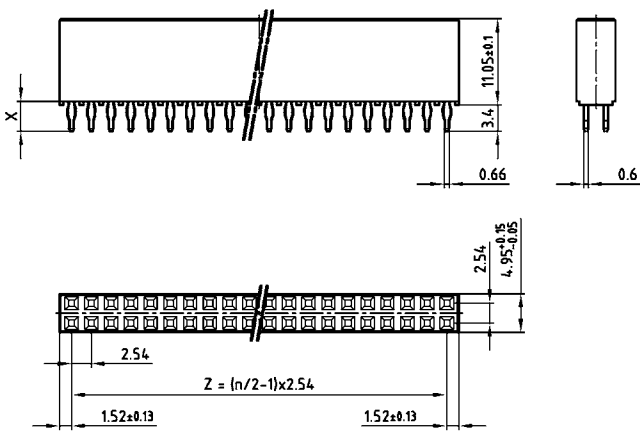

PCB-hole pattern

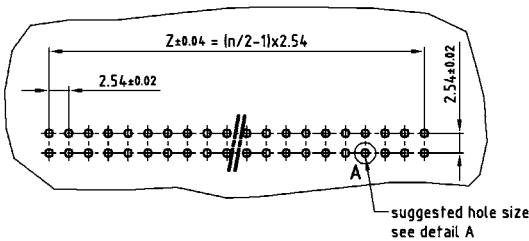

Quality Class	Plating	
	Underplate min. 1.3 µm Ni	
	Mating Area	Post Area "X"
3	0.25 µm Au	1.3 µm Sn 100 matt
2	0.40 µm Au	1.3 µm Sn 100 matt



ORDER DATA

(Dim. = mm)

Number of positions	Quality class 3	Quality class 2
40	49-000013	49-000012
64	49-000093	49-000092
100	49-000133	49-000132