


PC104PLUS Non-STACK-THROUGH VERSION

Female connector – straight – press fit contact – contact length 3.0 mm

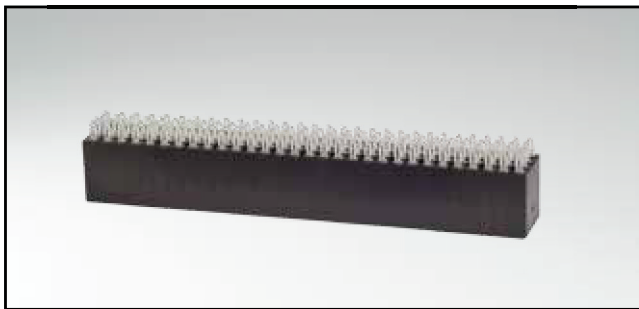




RoHS compliant

DESCRIPTION


- Flexible press fit design
- Double beam contacts
- Standard version 120-position
- Quality class 3 and alternative quality class 2 available on request

PRODUCT DRAWING

PCB-hole pattern

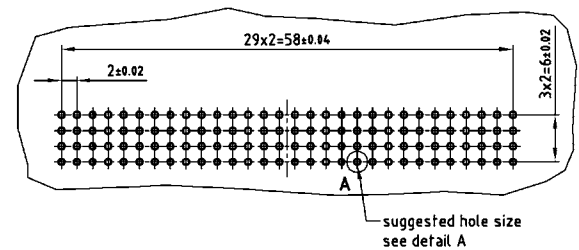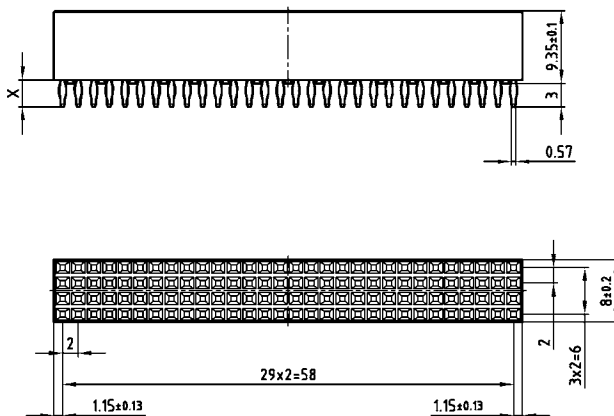

Quality Class	Plating	
	Underplate min. 1.3 µm Ni	
	Mating Area	Post Area "X"
3	0.25 µm Au	1.3 µm Sn 100 matt
2	0.40 µm Au	1.3 µm Sn 100 matt



ORDER DATA

(Dim. = mm)

Number of positions	Quality class 3	Quality class 2
120	49-100013	49-100012