


D-SUB STANDARD

Solder pin – Angled – .370" / 9.4 mm – Precision machined contacts – Plastic bracket



RoHS compliant – CSA listed, File No.: LR 115000-1 – UL listed, File No.: E202784


SOCKET CONNECTOR



No. of pos.	A -0.76	B -0.25	C
09	31.19	16.46	25.00 +0.12
15	39.52	24.79	33.30 +0.15
25	53.42	38.50	47.04 +0.13
37	69.70	54.96	63.50 +0.13
50	67.31	52.55	61.10 +0.14



PCB layout: Kat1 kGGA

Mounting style: Through-hole



50 pos. = Dim. in (_)


Mounting style: Threaded insert

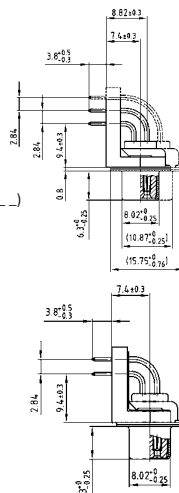

DESCRIPTION

- Mounting styles:
 - with mounting bracket and Ø .118" / 3 mm through-hole
 - with mounting bracket, grounding strap and 4-40 UNC or M3 threaded insert
 - with mounting bracket, grounding strap and 4-40 UNC or M3 front spacer
 - with mounting bracket, PCB clip and 4-40 UNC or M3 threaded insert
 - with mounting bracket, PCB clip and 4-40 UNC or M3 front spacer
- Quality class 3 (also available in quality class 1)
- Shell: Steel tin plated (brass tin plated or stainless steel available on request)


PLUG CONNECTOR



No. of pos.	A -0.76	B -0.25	C	D -0.3
09	31.19	16.79	25.00 +0.12	6.12
15	39.52	25.12	33.30 +0.15	6.12
25	53.42	38.84	47.04 +0.13	5.99
37	69.70	55.30	63.50 +0.13	5.99
50	67.31	52.68	61.10 +0.14	5.99



PCB layout: Kat1 kGHA

Mounting style: Through-hole



50 pos. = Dim. in (_)

Mounting style: Threaded insert

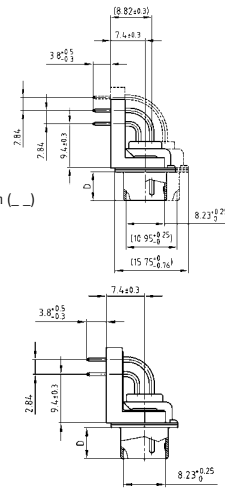

ORDER DATA

SOCKET CONNECTOR

No. of pos.	Mounting style	Part Number
09	Through-hole	164 A 10669 X
15	Through-hole	164 A 10679 X
25	Through-hole	164 A 10689 X
37	Through-hole	164 A 10699 X
50	Through-hole	164 A 10709 X
09	Grounding strap / 4-40 UNC Threaded insert	164 A 12329 X
15	Grounding strap / 4-40 UNC Threaded insert	164 A 12339 X
25	Grounding strap / 4-40 UNC Threaded insert	164 A 12349 X
37	Grounding strap / 4-40 UNC Threaded insert	164 A 12359 X
09	Grounding strap / M3 Threaded insert	164 A 12519 X
15	Grounding strap / M3 Threaded insert	164 A 12529 X
25	Grounding strap / M3 Threaded insert	164 A 12539 X
37	Grounding strap / M3 Threaded insert	164 A 12549 X

PLUG CONNECTOR

No. of pos.	Mounting style	Part Number
09	Through-hole	163 A 11719 X
15	Through-hole	163 A 11729 X
25	Through-hole	163 A 11739 X
37	Through-hole	163 A 11749 X
50	Through-hole	163 A 11759 X
09	Grounding strap / 4-40 UNC Threaded insert	163 A 14119 X
15	Grounding strap / 4-40 UNC Threaded insert	163 A 14129 X
25	Grounding strap / 4-40 UNC Threaded insert	163 A 14139 X
37	Grounding strap / 4-40 UNC Threaded insert	163 A 14149 X
09	Grounding strap / M3 Threaded insert	163 A 14169 X
15	Grounding strap / M3 Threaded insert	163 A 14179 X
25	Grounding strap / M3 Threaded insert	163 A 14189 X
37	Grounding strap / M3 Threaded insert	163 A 14199 X

