



Lötstift abgewinkelt 9,40 mm  
mit Durchgangsloch

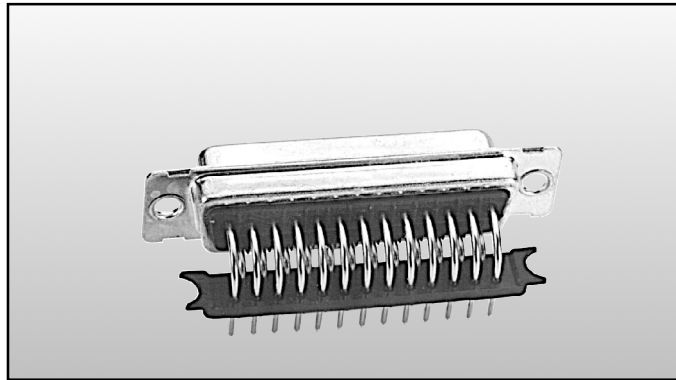


Solder pin angled .370"  
with through hole

Buchsenleiste / Socket connector

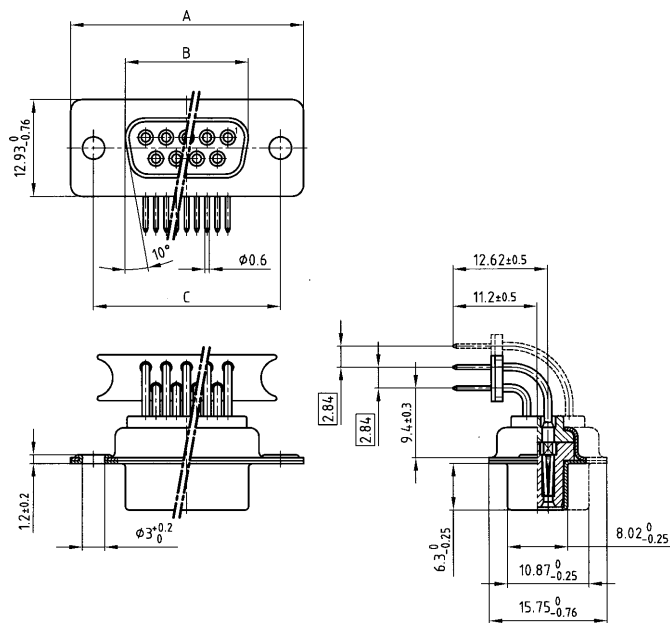

Stiftleiste / Plug connector

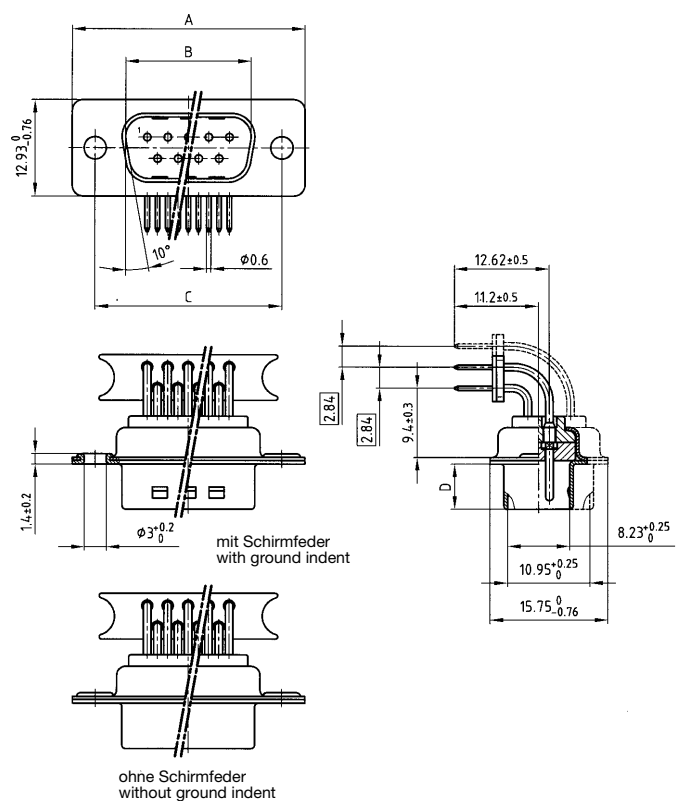

| Polzahl<br>No. of pos. | A - 0,76 | B - 0,25 | C                                                            |
|------------------------|----------|----------|--------------------------------------------------------------|
| 9                      | 31,19    | 16,46    | 25,00 $\begin{smallmatrix} +0,12 \\ -0,13 \end{smallmatrix}$ |
| 15                     | 39,52    | 24,79    | 33,30 $\begin{smallmatrix} +0,15 \\ -0,10 \end{smallmatrix}$ |
| 25                     | 53,42    | 38,50    | 47,04 $\pm 0,13$                                             |
| 37                     | 69,70    | 54,96    | 63,50 $\pm 0,13$                                             |
| 50                     | 67,31    | 52,55    | 61,10 $\begin{smallmatrix} +0,14 \\ -0,11 \end{smallmatrix}$ |

| Polzahl<br>No. of pos. | A - 0,76 | B + 0,25 | C                                                            | D - 0,30 |
|------------------------|----------|----------|--------------------------------------------------------------|----------|
| 9                      | 31,19    | 16,79    | 25,00 $\begin{smallmatrix} +0,12 \\ -0,13 \end{smallmatrix}$ | 6,12     |
| 15                     | 39,52    | 25,12    | 33,30 $\begin{smallmatrix} +0,15 \\ -0,10 \end{smallmatrix}$ | 6,12     |
| 25                     | 53,42    | 38,84    | 47,04 $\pm 0,13$                                             | 5,99     |
| 37                     | 69,70    | 55,30    | 63,50 $\pm 0,13$                                             | 5,99     |
| 50                     | 67,31    | 52,68    | 61,10 $\begin{smallmatrix} +0,14 \\ -0,11 \end{smallmatrix}$ | 5,99     |

Kat 1 i H4A

## Bestellnummern – Part numbers

Kat 1 i H5A

| Polzahl<br>No. of<br>Pos. | Buchsenleiste / Socket connector |                        |
|---------------------------|----------------------------------|------------------------|
|                           | gelb chromatiert<br>yellow zinc  | verzinkt<br>tin-plated |
| 9                         | 162 A 10169 X                    | 164 A 10169 X          |
| 15                        | 162 A 10179 X                    | 164 A 10179 X          |
| 25                        | 162 A 10189 X                    | 164 A 10189 X          |
| 37                        | 162 A 10199 X                    | 164 A 10199 X          |
| 50                        | 162 A 10209 X                    | 164 A 10209 X          |

| Polzahl<br>No. of<br>Pos. | Stiftleiste / Plug connector                                              |                                                              |
|---------------------------|---------------------------------------------------------------------------|--------------------------------------------------------------|
|                           | gelb chromatiert ohne Schirmfederung<br>yellow zinc without ground indent | verzinkt mit Schirmfederung<br>tin-plated with ground indent |
| 9                         | 161 A 10169 X                                                             | 163 A 11219 X                                                |
| 15                        | 161 A 10179 X                                                             | 163 A 11229 X                                                |
| 25                        | 161 A 10189 X                                                             | 163 A 11239 X                                                |
| 37                        | 161 A 10199 X                                                             | 163 A 11249 X                                                |
| 50                        | 161 A 10209 X                                                             | 163 A 11259 X                                                |