



Lötstift abgewinkelt 9,40 mm
mit Durchgangsloch

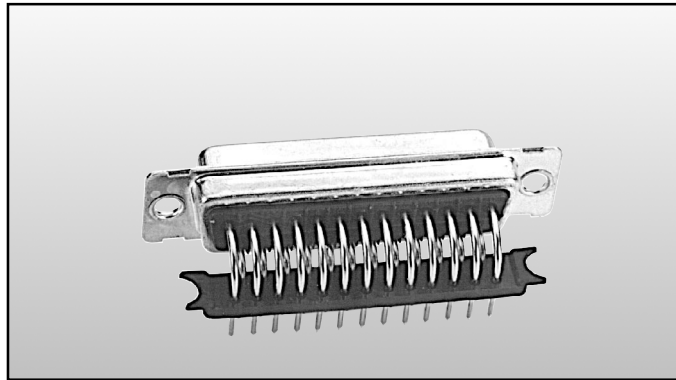


Solder pin angled .370°
with through hole

Buchsenleiste / Socket connector

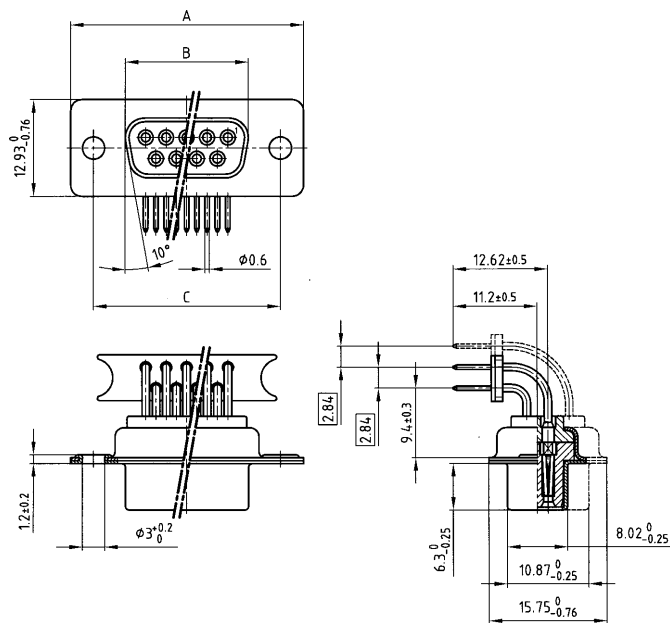

Stiftleiste / Plug connector

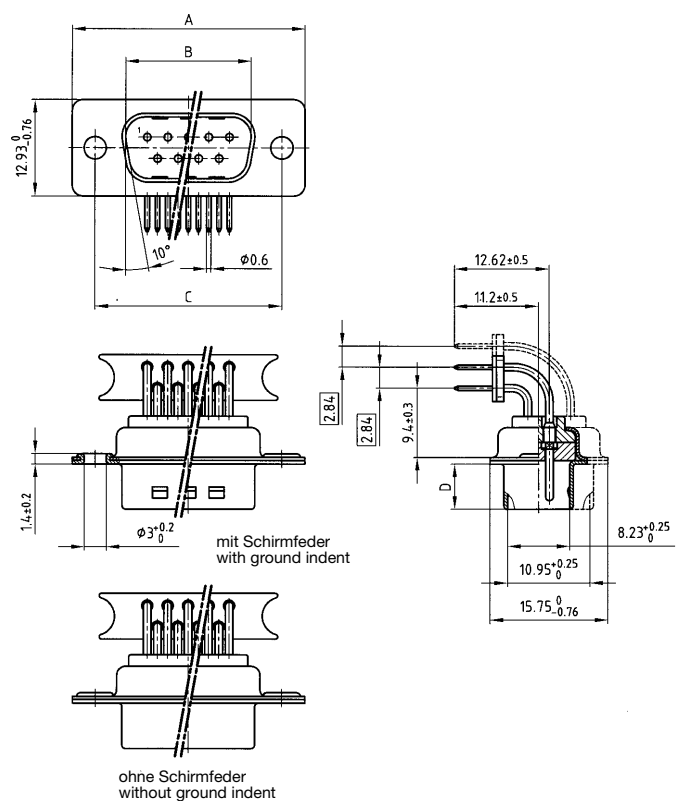

Polzahl No. of pos.	A - 0,76	B - 0,25	C
9	31,19	16,46	25,00 $\begin{smallmatrix} +0,12 \\ -0,13 \end{smallmatrix}$
15	39,52	24,79	33,30 $\begin{smallmatrix} +0,15 \\ -0,10 \end{smallmatrix}$
25	53,42	38,50	47,04 $\pm 0,13$
37	69,70	54,96	63,50 $\pm 0,13$
50	67,31	52,55	61,10 $\begin{smallmatrix} +0,14 \\ -0,11 \end{smallmatrix}$

Polzahl No. of pos.	A - 0,76	B + 0,25	C	D - 0,30
9	31,19	16,79	25,00 $\begin{smallmatrix} +0,12 \\ -0,13 \end{smallmatrix}$	6,12
15	39,52	25,12	33,30 $\begin{smallmatrix} +0,15 \\ -0,10 \end{smallmatrix}$	6,12
25	53,42	38,84	47,04 $\pm 0,13$	5,99
37	69,70	55,30	63,50 $\pm 0,13$	5,99
50	67,31	52,68	61,10 $\begin{smallmatrix} +0,14 \\ -0,11 \end{smallmatrix}$	5,99

Kat 1 i H4A

Bestellnummern – Part numbers

Kat 1 i H5A

Polzahl No. of Pos.	Buchsenleiste / Socket connector	
	gelb chromatiert yellow zinc	verzinkt tin-plated
9	162 A 10169 X	164 A 10169 X
15	162 A 10179 X	164 A 10179 X
25	162 A 10189 X	164 A 10189 X
37	162 A 10199 X	164 A 10199 X
50	162 A 10209 X	164 A 10209 X

Polzahl No. of Pos.	Stiftleiste / Plug connector	
	gelb chromatiert ohne Schirmfederung yellow zinc without ground indent	verzinkt mit Schirmfederung tin-plated with ground indent
9	161 A 10169 X	163 A 11219 X
15	161 A 10179 X	163 A 11229 X
25	161 A 10189 X	163 A 11239 X
37	161 A 10199 X	163 A 11249 X
50	161 A 10209 X	163 A 11259 X