

OPF-H2000

4K@60 HDMI Fiber Optic Extender



The IDK OPF-H2000 Fiber optic extender is a transmitter and receiver set for long distance transmission of HDMI video, Gigabit ethernet signal, and bidirectional RS-232C control signals over fiber optic cabling. 4K@60 is supported. The input signals are transmitted pass through and without compression so that the image quality can be kept.

FRONT & REAR PANEL




FEATURES

- Video:**
 - Supports up to 4K@60 (4:2:0)
 - Extension distance
 - Multimode fiber (OM3): 493 ft. approx. (150 m)
 - Singlemode fiber (OS1): 4593 ft. approx. (1.4 km)
- Others:**
 - Gigabit ethernet signal transmission
 - Bidirectional communication via RS-232C and LAN
- Control:**
 - HDCP (Pass through)
 - CEC (Pass through)
 - AC adapter mechanical lock

PRODUCT SELECTION

Model Number	Fiber Type	Max. Distance
OPF-TH2000-MM	Multimode	OM3: 493 ft. approx. (150 m)
OPF-RH2000-MM		
OPF-TH2000-SM	Singlemode	OS1: 4593 ft. approx. (1.4 km)
OPF-RH2000-SM		

CONNECTION DIAGRAM

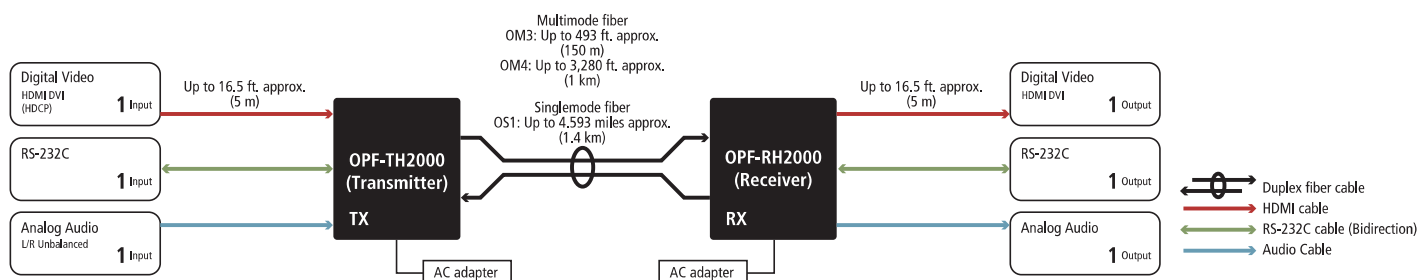

SPECIFICATIONS

Model number				OPF-TH2000 (Transmitter)	OPF-RH2000 (Receiver)
Input	Video	Digital	Number / Signal	1 input / HDMI (HDCP 1.4: Pass through, CEC: Pass through) TMDs Single Link, TMDs dock: 25 MHz to 297 MHz	1 input / Optical signal for extension
			Connector	1 female HDMI Type A	2 LC connectors
		Others	Color depth: 24 bit, 30 bit, 36 bit Deep Color		
		Formats	480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K / VGA / SVGA / XGA / WXGA (1280x768) / WXGA (1280x800) / Quad-VGA / SXGA / WXGA (1360x768) / WXGA (1366x768) / SXGA+ / WXGA+ / WXGA++ / UXGA / WSXGA+ / WUXGA / QWXGA / 4K		
	Audio	Digital	Number / Signal	1 input / Multi-channel linear PCM up to 8 channels	1 inputs / Optical signal for extension
Connector			1 female HDMI Type A	2 LC connectors	
Output	Video	Digital	Number / Signal	1 output / Optical signal for extension	1 output / HDMI (HDCP 1.4: Pass through, CEC: Pass through) TMDs Single Link, TMDs clock: 25 MHz to 297 MHz
			Connector	2 LC connectors	1 female HDMI Type A
		Others	Color depth: 24 bit, 30 bit, 36 bit Deep Color		
		Formats	480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K / VGA / SVGA / XGA / WXGA (1280x768) / WXGA (1280x800) / Quad-VGA / SXGA / WXGA (1360x768) / WXGA (1366x768) / SXGA+ / WXGA+ / WXGA++ / UXGA / WSXGA+ / WUXGA / QWXGA / 4K		
	Audio	Digital	Number / Signal	1 output / Optical signal for extension	1 output / Multi-channel linear PCM up to 8 channels
			Connector	2 LC connectors	1 female HDMI Type A
Plug & Play				Pass through	
Fiber optic cable	Suitable cable		Duplex fiber cable, SFP module (2 LC connectors)		
	Polishing		SFP for Multimode: PC (recommended) SFP for Singlemode: UPC (recommended), SPC supported * APC is not supported.		
Signal transmission distance				Multimode fiber (OM3): 493 ft. approx. (150 m), Singlemode fiber (OS1): 4593 ft. approx. (1.4 km)	
Control	Serial control port	Number / Signal	Connector	1 port / Full duplex up to 115.2 kbps	
			Connector	1 male 9-pin D-Sub	
	LAN control port	Number / Signal	Connector	1 port / 10Base-T, 100Base-TX, 1000Base-T (Auto Negotiation), Auto MDI / MDI-X	
			Connector	1 RJ-45	
Others	AC adapter		Input: 100 - 240 VAC \pm 10%, 50 Hz / 60 Hz \pm 3 Hz, Output: 5 VDC (AC adapter is supplied)		
	Power consumption		About 9 Watts		About 9 Watts
	Dimensions		4.17 (W) \times 1.16 (H) \times 4.72 (D)" approx. (106 (W) \times 29.5 (H) \times 120 (D) mm) (Quarter rack, not including projections)		
	Weight		0.88 lbs. approx. (0.4 kg)		
	Temperature		Operating temperature: 32°F to 104°F (0°C to +40°C) Storage temperature: -4°F to +176°F (-20°C to +80°C)		
	Humidity		Operating / Storage humidity: 20% to 90% (Non Condensing)		