

AvediaStream TVgateway g4412


Datasheet



The AvediaStream g4412 TVgateway receives content-protected live TV and radio from satellite RF sources and streams them across an IP network.

With dual conditional access slots, the g4412 descrambles and distributes encrypted and free to air channels across your IP network. Note that if the content owner/broadcaster requires the streams to be encrypted through the IP network then the AvediaStream g4415-sm TVgateway should be used.

- Dual DVB-S/S2 RF tuners per blade for free-to-air TV or radio channels
- Two DVB-CI CA slots for scrambled TV or radio channels
- Streams both SD and HD channels simultaneously
- Advanced filtering to create duplicate channels (eg language specific), control bandwidth or provide data services such as EPG or MHEG data
- Exterity 4th generation TVgateway technology gives improved RF performance, high reliability and low power consumption
- Future-proof IPTV technology with support for 4K/Ultra HD/HEVC broadcast streams
- High reliability, high performance embedded architecture

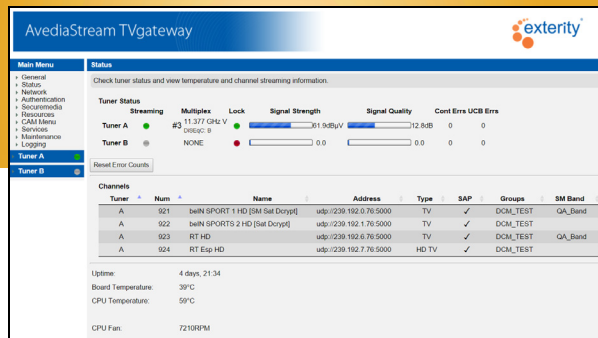

Technical Specification

Interfaces

- Two DVB-S/S2 tuners (two 75 ohm F-type input connectors)
- Two 802.3 10/100/1000BaseT Ethernet (RJ-45 chassis sockets, dual Ethernet features require AvediaStream c1210 chassis)
- Serial RS232 port for local administration (RJ-45 chassis socket)
- Two DVB-CI interfaces accept professional and commercial CAMs
- Supports Mediaguard, Viaccess, Irdeto, Conax decrypting and more

Streaming

- Single program MPEG-2 transport streams (ISO/IEC 13818-1)
- RTP
- UDP
- IP multicast
- IP unicast
- IGMP Join Group for enhanced switch compatibility
- 500 Mbps total output streaming

Channel Management

- Channel announcement via SAP/SDP
- Configurable DVB-S/S2 scanning (basic and advanced modes)
- Stream specific channels from selected multiplexes
- Multicast/unicast address selection (automatic or manual)
- Configure name, number and group membership per channel
- Fine-grained control over audio, subtitles and other channel metadata using advanced PID filtering:
 - Create custom SPTS streams containing elements from a channel

- Filters on PSI data, table types and PID number
- Unlimited number of PIDs filtered

Management

- Fully integrated with Exterity management tools
- Network administration via SSH and SNMP
- HTTP web interface (supported browsers: Firefox, Internet Explorer and Chrome, check with support@exterity.com for version information)
- Serial RS232 Admin Port
- Event logging via Syslog (local and remote)
- Firmware upgrade via TFTP
- Configuration backup/restore via TFTP

RF Input

Input connector: two 75 ohm F-type

Tuning range: 950 to 2150 MHz

Input level: -25 dBm to -65 dBm

Maximum data rate: 72Mbps per transport stream

Signal modulation/coding:

- **DVB-S (ETSI EN 300 421 Broadcast services)**
 - Modulation: QPSK: 1/2, 2/3, 3/4, 5/6, 7/8
 - Symbol rates: 1 to 45 MSymbols/s
 - FEC: Reed Solomon & Viterbi
 - Roll off: 0.35

• DVB-S2 (ETSI EN 302 307 Broadcast services)

- Modulation: QPSK: 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
- 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10
- Symbol rates: 1 to 45 MSymbols/s
- FEC: LDPC & BCH
- Roll off: 0.2, 0.25, 0.35
- Diseq: 1.0, 1.1, 1.2
- LNB supply: 350mA per RF input with Short circuit protection
- LNB Voltage: 13 or 18v

System

- CPU: Dual core Power Architecture e500v2 1.2Ghz
- RAM: 1GB
- Flash: 528MB (for firmware and configuration)
- OS: Linux 3.8

Network

- Linux IPv4 stack
- DHCP or Static IP addressing
- Two IEEE 802.3u 10/100/1000Mbps MDIX Ethernet interfaces
- Ethernet redundancy - automatic switching to secondary Ethernet if network failure occurs (c1210 chassis required)

Physical Format

Modular hot-swap blade for Exterity chassis

- AvediaStream c1101 providing 2 RF multiplex inputs
- AvediaStream c1103 providing up to 6 RF multiplex inputs
- AvediaStream c1110 providing up to 20 RF multiplex inputs
- AvediaStream c1210 providing up to 20 RF multiplex inputs

Regulatory

CE:

- IEC 60950-1:2005 (Second Edition), Am 1: 2009
- EN 60950-1:2006+A11:2009+A1:2010+A12:2011

- EN55022:2010; EN55024:2010
- EN61000-3-2: 2006 +A1: 2009 + A2: 2009
- EN61000-3-3: 2008; EN61000-4-2: 2009
- EN61000-4-3: 2006 + A1: 2007 + A2: 2010
- EN61000-4-4: 2004 + A1: 2010
- EN61000-4-5: 2006; EN61000-4-6: 2009
- EN61000-4-11: 2004

FCC:

- 47CFR: 2008 Part 15, Sub Part B; ANSI C63-4: 2003

Protocols

IP (RFC 791), UDP (RFC 768), TCP (RFC 793), ARP (RFC 826), DNS (RFC 1035), DHCP (RFC 2131), ICMP (RFC 792), IGMP v3 (RFC 3376), TFTP (RFC 1350), HTTP (RFC 2616), Telnet (RFC 318) Syslog (RFC 3164), NTP (RFC 1305), SAP (RFC 2974), SDP (RFC 4566), RTP (RFC 3550), SNMP (v1, v2c RFC 1901)

Dimensions

- L: 275mm x W: 130mm x H: 40mm

Weight

- 0.55kg

Environment

- Operating: 0 ...+40°C / +32 ... +104°F
- Storage: -20 ...+70°C / -4 ... +158°F
- Operating and storage Relative Humidity: 10-90% (non-condensing)

Power

- DC 24V: 14W Typical, 20W Maximum

MTBF

- Calculated to MIL-HDBK-217F, Notice 2: 55457 hours (6.3 years)

TVgateway Comparison Table

AvediaStream TV Gateways													
	g4190	g4310	g4315	g4330	g4340	g4345	g4370	g4410	g4412	g4415-SM	g4418	g4442	g4448
DVB-C/C2					✓	✓						✓	✓
DVB-C2												✓	✓
DVB-T				✓	✓	✓						✓	✓
DVB-T2					✓	✓						✓	✓
DVB-S		✓	✓					✓	✓	✓	✓		
DVB-S2		✓	✓					✓	✓	✓	✓		
ATSC							✓						
Clear QAM							✓						
ASI	✓												
SecureMedia encryption										✓			
Tuners	1	2	2	2	2	2	2	2	2	2	8	2	8
CA Slots			2			2			2	2		2	

United Kingdom Headquarters

t: +44 (0) 1383 828 250

f: +44 (0) 1383 824 905

w : www.exterity.com

e : info@exterity.com

HQ Edinburgh, UK. Regional offices in Atlanta, Dubai, Hong Kong, Johannesburg, London, Munich and Paris.

Leading IPTV Delivery

