



AvediaStream e3535

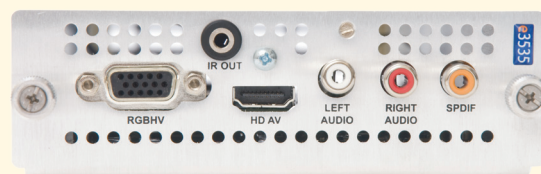

The AvediaStream e3535 encoder streams pre-recorded and live TV (news, sports, entertainment, educational) HD and SD channels over your existing network. It encodes and distributes content from sources with an HDMI® output* such as Blu-Ray/DVD Players, set top boxes, digital cameras, digital signage systems and PCs to an IP network. It can upscale to 1080p or downscale to SQCIF.

- Hot swap module allows quick and non intrusive upgrade to existing installations
- Accepts wide range of video input resolutions and scales to standard TV resolutions
- 1080p, 1080i, 720p, HD, SD or Sub-SD Encoding
- MPEG-2 AAC or MPEG-1 layer 2 audio encoding
- Video input options: HD AV, RGBHV or YPbPr
- Audio input options: HD AV, Unbalanced Stereo or S/PDIF
- H.264 video encoding from devices such as Blu-ray Disc players, digital signage systems and PCs
- IR out for remote control of source device
- Frame rate and audio sample rate conversion

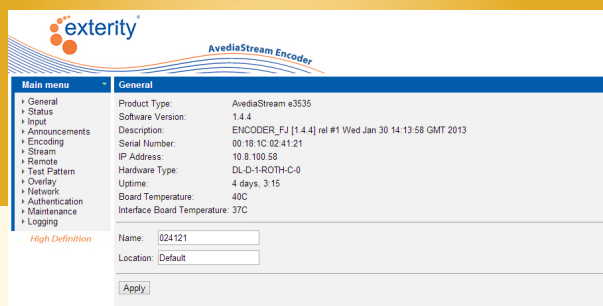

Technical Specifications

Interfaces

Video Input:

- HD AV (HDMI style connector, HDCP encrypted content is not supported),
- RGBHV (15-pin D-type)
- YPbPr (Component) using adaptor

Audio Input:

- HD AV (Embedded)
- Unbalanced Line Level stereo (RCA). 2V p-p 75Ω
- S/PDIF Digital Audio (RCA). 0.5V p-p 75Ω

IR out (3.5mm jack socket)

802.3 10/100BaseT Ethernet (RJ-45 chassis socket)

Serial RS232 Port for local administration (RJ-45 chassis socket)

Streaming

- Up to 80Mbps output per blade
- Single program MPEG-2 transport streams (ISO/IEC 13818-1)
- RTP
- UDP
- Multi IP unicast (up to 10 simultaneous locations)
- IGMP
- Channel announcement using SAP/SDP
- Video or audio only options

Administration Interface

- Configurable Video Input Selection
- Configurable aspect ratio override
- Multicast/unicast address selection (automatic or manual)
- Configure name, number and group membership

Management

- Fully integrated with all Exterity management tools
- Network administration via HTTP web interface, SNMP & Telnet
- Serial RS232 Admin Port
- Telnet Control Interface (TCI)
- Event logging via Syslog (RFC 3164) local and remote
- Firmware upgrade via TFTP
- Configuration backup/restore via TFTP

Video Input

PC, HD, ED, SD auto-switching

Resolutions supported:

1080p 23.98Hz/24Hz/50Hz/59.94Hz/60Hz, 1080i 50Hz/59.94Hz/60Hz, 720p 50Hz/59.94Hz/60Hz, 525p 60Hz and 625p 50Hz, 480/525i 60Hz and 576i/625i 50Hz (HD AV/YPbPr), WXGA (1280×768) 60Hz, SXGA (1280×1024) 60Hz, XGA (1024×768) 60Hz/75Hz, SVGA (800×600) 60Hz/75Hz/85Hz, VGA (640×480) 60Hz/75Hz/85Hz

HD 16:9 aspect ratio

SD 4:3/16:9 aspect ratio

Audio Encoding

Stereo:

- MPEG-1, Layer 2 or MPEG-2 AAC (LC profile)
- Encoding bit rate 48kbps – 384kbps
- Audio sampling rate 32kHz, 44.1kHz or 48kHz
- Audio sample rate conversion

MPEG-4 Encoding

HD: H.264 High Profile Level 4.0

SD: H.264 Main Profile Level 3.0

- Sub-SD 100kbps - 10Mbps
- 525i/625i 500kbps - 15Mbps
- 525p/625p 1Mbps - 15Mbps
- 720p 2Mbps - 20Mbps
- 1080i/1080p24 3Mbps - 24Mbps
- 1080p50/60 4Mbps - 30Mbps
- Constant or variable bitrate

SQCIF, QCIF, CIF, DCIF, QVGA, HVGA, VGA, WVGA, FWVGA, D1, ED, 720p, 1080i, 1080p video resolutions frame rate conversion

IR Output

LIRC based control of AV source device

Additional Features

Watermarking (encode customisable text into stream)
Test pattern generation
Automatic streaming of fixed colour/test pattern on loss of video

Network

- Linux IPv4 stack
- DHCP or Static IP addressing
- IEEE 802.3u 10/100Mbps MDIX Ethernet

System

- CPU: MIPS 4Kc 492MHz
- RAM: 64MB
- Flash: 16MB (for firmware and configuration)
- OS: Linux 2.6

Protocols

IP (RFC 791), UDP (RFC 768), TCP (RFC 793), ARP (RFC 826), DNS (RFC 1035), DHCP (RFC 2131), ICMP (RFC 792), IGMP (RFC 3376), TFTP (RFC 1350), HTTP (RFC 2616), Telnet (RFC 318), Syslog (RFC 3164), NTP (RFC 1305), SAP (RFC 2974), SDP (RFC 4566), RTP (RFC 3550), SNMP (v1, v2c -RFC 1901)

Regulatory

CE:
EN55022: 2006, EN61000: 2006, EN55024:2003
IEC 60950-1: 2005 Second Edition /EN 60950-1: 2006
+ A11:2009

UL/CSA:
47CFR: 2008, ANSI C63-4: 2003
CSA 60950-1-03, 1st Ed. UL 60950-1, 1st Ed.

Physical Format

Modular hot swap blade for Exterity chassis

- AvediaStream c1101 providing 1 input
- AvediaStream c1103 providing up to 3 inputs
- AvediaStream c1110 providing up to 10 inputs

Power

DC 24V: 12W Typical, 14W Maximum

Environment

- Operating: 0 ...+40°C / +32 ... +104°F
- Storage: -20 ...+70°C / -4 ... +158°F
- Operating and storage Relative Humidity: 10-90% (non-condensing)

Dimensions

L: 275mm x W: 130mm x H: 40mm

Weight

0.5kg

AvediaStream Encoders										
	e2310	e2320	e3522	e2635	e3635	e3535	e2655	e3655	e3555	
Encoding	HD 1080p					✓			✓	
	HD 1080i		✓		✓	✓		✓	✓	
	SD	✓	✓	✓	✓	✓	✓	✓	✓	
	H.264	✓	✓	✓	✓	✓	✓	✓	✓	
	MPEG-2	✓	✓		✓	✓	✓	✓		
	Software Scaler	✓	✓	✓						
	Hardware Scaler				✓	✓	✓	✓	✓	
	MPEG-1 Layer II	✓	✓	✓	✓	✓	✓	✓	✓	
	Stereo AAC				✓	✓	✓	✓	✓	
Video Input	Composite	✓	✓	✓						
	S-Video	✓	✓							
	SD Component	✓	✓	✓	✓	✓	✓			
	HD Component			✓	✓	✓	✓			
	RGBS	✓	✓							
	RGBHV				✓	✓	✓			
	HD AV				✓	✓	✓			
	SD SDI						✓	✓	✓	
	HD SDI						✓	✓	✓	
	3G SDI						✓	✓	✓	
Audio Input	Line Level Stereo Audio	✓	✓	✓	✓	✓				
	Balanced Audio			✓						
	Embedded Audio				✓	✓	✓	✓	✓	
	PCM digital Audio			✓	✓	✓	✓	✓	✓	
	IR Out			✓		✓				

Table 1. Encoder Comparison Table

Headquarters

t: +44 (0) 1383 828 250
f: +44 (0) 1383 824 905

w : www.exterity.com
e : info@exterity.com

HQ Edinburgh, UK. Regional offices in Atlanta, Dubai, Hong Kong, Johannesburg, London, Munich and Paris.

© 2013 Exterity Ltd. All rights reserved.

The Exterity logo, AvediaStream, AvediaServer and AvediaPlayer are trademarks or registered trademarks of Exterity Ltd. The information and specification are subject to change without prior notice. Exterity tries to ensure that all information in this document is correct but does not accept liability for any error or omission. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Leading IPTV Delivery



Version

1.2

2013 10 22