


Male connector – straight and angled – 32 and 48 positions




■ Solder pin


- Solder pin
- Quality class 3 (also available in quality class 2 or 1)
- Premating contacts in row "z", "b" and "d" available
- Special assembly on request




PCB-hole pattern

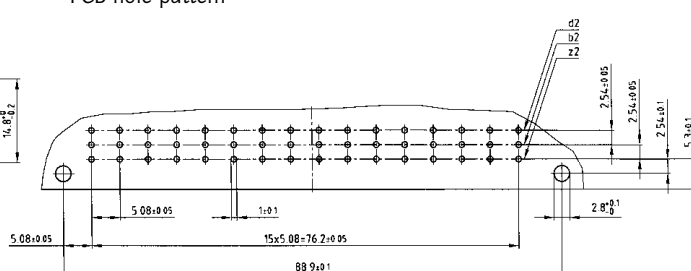

Solder pin angled
contact spacing 5.08 mm



Solder pin angled
contact spacing 2.54 mm



No. of Pos.	Row	• = contact, + = no contact				Contact spacing	Solder pin angled	
		Pos.	2	4	6			...
32	d		+	+	+		2.54 mm	121 A 10699 X
	b		•	•	•	•		
	z		•	•	•	•		
32	d		•	•	•	•	5.08 mm	121 A 10709 X
	b		+	+	+	+		
	z		•	•	•	•		
48	d		•	•	•	•	2.54 mm	121 A 10719 X
	b		•	•	•	•		
	z		•	•	•	•		