



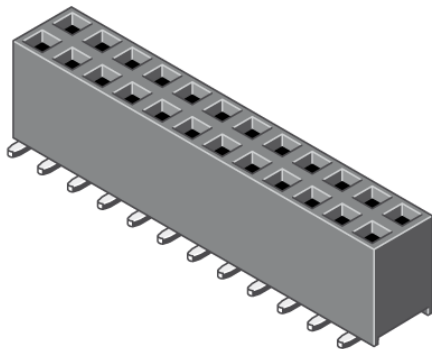


PCB sockets, SMD termination, with precision stamped dual entry contacts. Standard profile version with a height of 7,50 mm.

Double row

Pitch (mm)	2,54
Mating pin size (range)	Ø 0,70-0,80, ? 0,64
No of contacts	10
Positioning peg	without
Polarising	No
Locking	No
Feed through option	Feed through
Material contact	Phosphor bronze
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} / V _{DC}
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	Without cap

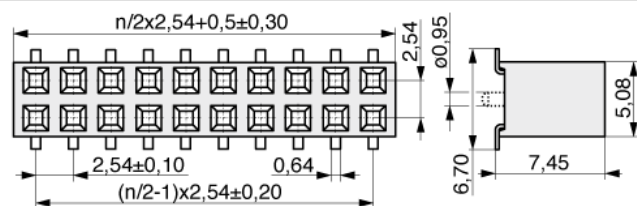

Footprint:

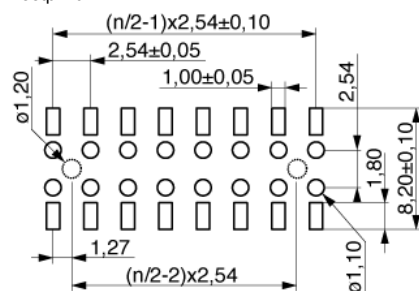

Date: 18.04.2011

Order code: 098-6-010-0-NFX-YT0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: yk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=098-6-010-0-NFX-YT0